

Arbeitsbericht NAB 20-08

**TBO Bülach-1-1:
Data Report
Summary Plot**

March 2021

**National Cooperative
for the Disposal of
Radioactive Waste**

Hardstrasse 73
P.O. Box 280
5430 Wettingen
Switzerland
Tel. +41 56 437 11 11

www.nagra.ch

Arbeitsbericht NAB 20-08

TB0 Bülach-1-1: Data Report Summary Plot

March 2021

Keywords:

Bülach-1-1, Bülach-1-1B, BUL1-1, BUL1-1B, Nördlich Lägern, TB0, deep drilling campaign, wireline, cores, cuttings, casing, lithostratigraphy, structural geology, logging, petrophysics, mineralogy, packer testing, pore water chemistry, natural tracers, laboratory testing, geomechanics, rock properties, stress indicators

**National Cooperative
for the Disposal of
Radioactive Waste**

Hardstrasse 73
P.O. Box 280
5430 Wettingen
Switzerland
Tel. +41 56 437 11 11

www.nagra.ch

Nagra Arbeitsberichte ("Working Reports") present the results of work in progress that have not necessarily been subject to a comprehensive review. They are intended to provide rapid dissemination of current information.

This NAB aims at reporting drilling results at an early stage. Additional borehole-specific data will be published elsewhere. In the event of inconsistencies between dossiers of this NAB, the dossier addressing the specific topic takes priority. In the event of discrepancies between Nagra reports, the chronologically later report is generally considered to be correct. Data sets and interpretations laid out in this NAB may be revised in subsequent reports. The reasoning leading to these revisions will be detailed there.

The composite plot was set up and designed by D.Arndt, M.Gysi, H.R.Müller and M.Schnellmann based on the information contained in Dossiers I to X.

The following Nagra project managers, responsible for the individual dossiers, provided technical input: M. Ammen (Dossier I), M. Gysi (Dossier II, III and V), G. Deplazes (Dossier IV), R. Garrard (Dossier VI), T. Vogt (Dossier VII), D. Traber (Dossier VIII), S. Giger (Dossier IX) and J.K. Becker (Dossier X).

Editorial works: L. McKinley and P. Blaser

Layout: M. Unger

"Copyright © 2021 by Nagra, Wettingen (Switzerland) / All rights reserved.

All parts of this work are protected by copyright. Any utilisation outwith the remit of the copyright law is unlawful and liable to prosecution. This applies in particular to translations, storage and processing in electronic systems and programs, microfilms, reproductions, etc."

Table of Contents

Table of Contents	I
List of Tables.....	II
List of Figures	II
List of Appendices	II
1 Introduction	1
1.1 Context.....	1
1.2 Location and specifications of the borehole	2
1.3 Documentation structure for the BUL1-1 borehole	5
1.4 Scope and objectives of this dossier	6
2 Short explanation of the attached summary plot.....	7
2.1 Metres MD.....	7
2.2 System / Period / Group / Formation / Member	7
2.3 Depth interval (core depth).....	7
2.4 Lithology	7
2.5 Weathering plot with GR.....	7
2.6 Cuttings & core photos	7
2.7 Cored interval	7
2.8 Tadpole plot – bedding	8
2.9 Fracture density class.....	8
2.10 P32 fault & fracture density.....	8
2.11 Casing	8
2.12 Caliper	8
2.13 Resistivity	9
2.14 FMI static.....	9
2.15 Neutron porosity / Density.....	9
2.16 Natural gamma ray / Temperature	10
2.17 Clay mineral content.....	10
2.18 Multi-mineral interpretation	10
2.19 Clay mineralogy	10
2.20 Porosity	11
2.21 Chloride	11
2.22 Stable isotopes of porewater ($\delta^2\text{H}$, $\delta^{18}\text{O}$).....	11
2.23 Hydraulic conductivity	11
2.24 (Apparent) hydraulic head	11
2.25 Sonic / Peak strength	12
2.26 Stress magnitudes	12
2.27 Stress indicators	12
3 References.....	13

List of Tables

Tab. 1-1:	General information about the BUL1-1 borehole.....	2
Tab. 1-2:	List of dossiers included in NAB 20-08	5

List of Figures

Fig. 1-1:	Tectonic overview map with the three siting regions under investigation	1
Fig. 1-2:	Overview map of the investigation area in the Nördlich Lägern siting region with the location of the BUL1-1 borehole and the existing Weiach-1 borehole	3
Fig. 1-3:	Lithostratigraphic profile and casing scheme for the BUL1-1 borehole	4

List of Appendices

App. A:	Summary Plot
---------	--------------

Note: In the digital version of this report the appendix can be found under the paper clip symbol.

1 Introduction

1.1 Context

To provide input for site selection and the safety case for deep geological repositories for radioactive waste, Nagra has drilled a series of deep boreholes in Northern Switzerland. The aim of the drilling campaign is to characterise the deep underground of the three remaining siting regions located at the edge of the Northern Alpine Molasse Basin (Fig. 1-1).

In this report, we present the results from the Bülach-1-1 borehole.

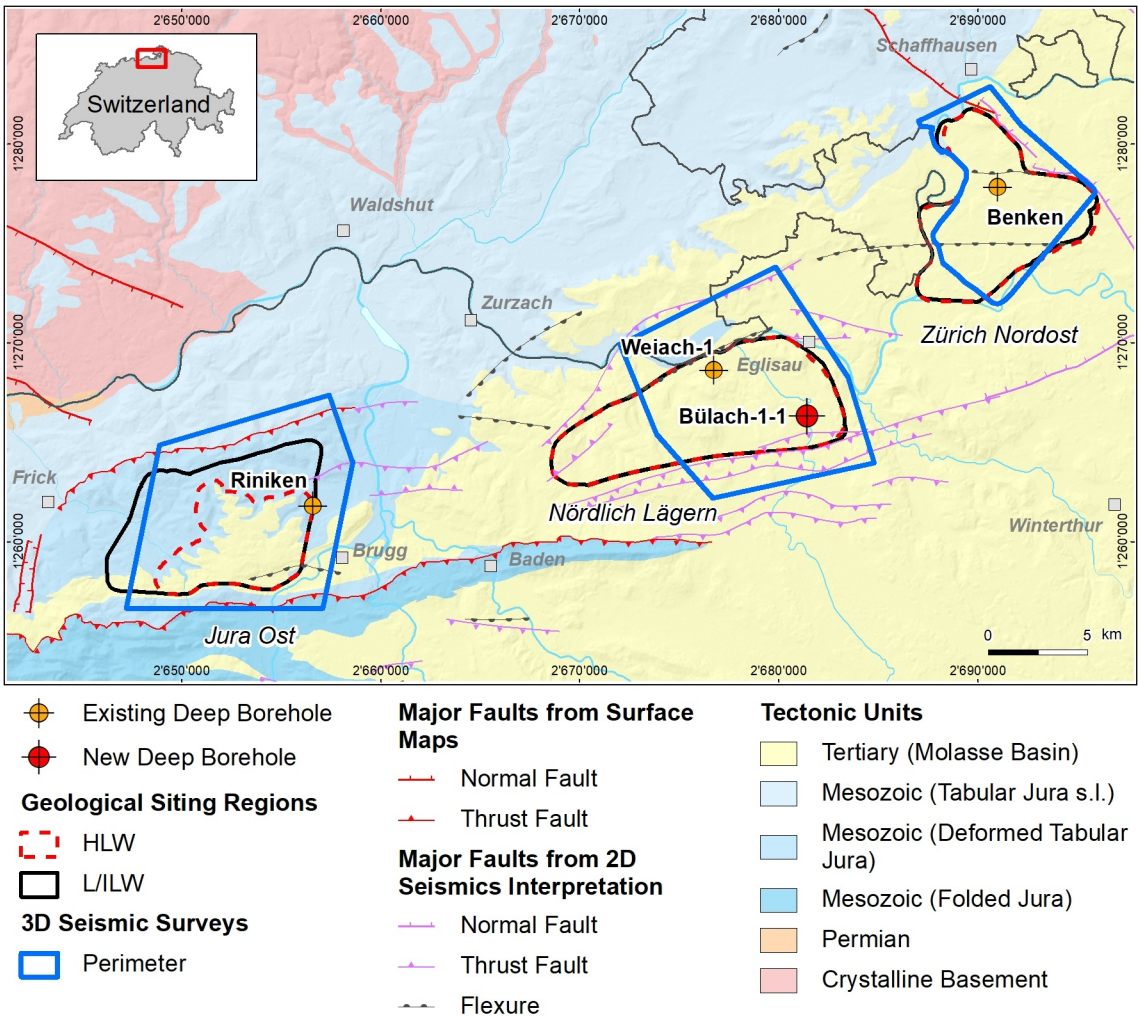


Fig. 1-1: Tectonic overview map with the three siting regions under investigation

1.2 Location and specifications of the borehole

The Bülach-1-1 (BUL1-1) exploratory borehole is the first deep borehole drilled within the framework of the TBO project. BUL1-1 is a vertical borehole. The drill site is located in the south-eastern part of the Nördlich Lägern siting region (Fig. 1-2). The borehole specifications are provided in Tab. 1-1. The lithostratigraphic profile and the casing scheme are shown in Fig. 1-3. Due to instabilities, the borehole was plugged back from 1'043.00 m to 918.70 m (*cf.* Dossier I). Resuming coring operations, a sidetrack was initiated with a kickoff point at 995.85 m. This sidetrack was labelled Bülach-1-1B (BUL1-1B). BUL1-1B reached the final depth of 1'370.19 m (measured depth MD core depth)¹. For easier communication and labelling, the name BUL1-1 is generally used for the complete vertical borehole unless stated otherwise. Fig. 1-3 shows the combined lithostratigraphic profile of BUL1-1.

Tab. 1-1: General information about the BUL1-1 borehole

Location	Bülach (Canton Zurich / ZH), Switzerland
Siting region	Nördlich Lägern
Coordinates	2'681'446.028 / 1'266'298.472
Elevation	389.62 m asl (top of rig cellar)
Borehole depth	1'370.19 m MD core depth
Drilling period	15 April 2019 – 27 November 2019 (spud – rig release)
Drilling company	Daldrup & Söhne AG
Drilling rig	Wirth B 152t
Drilling fluid	Water-based mud with varying amounts of Pure-Bore®, Pure-Bore® ULV, soda ash, sodium bicarbonate, xanthan gum

¹ *Measured depth (MD)* below top rig cellar along borehole trajectory. In all dossiers, depth refers to MD unless stated otherwise.

MD core depth refers to the depth marked on the cores. Note that petrophysical logs have not been shifted to core depth, hence MD log depth differs from MD core depth. The depth shift between core depth and log depth is documented in Dossier V, Appendix E-1.

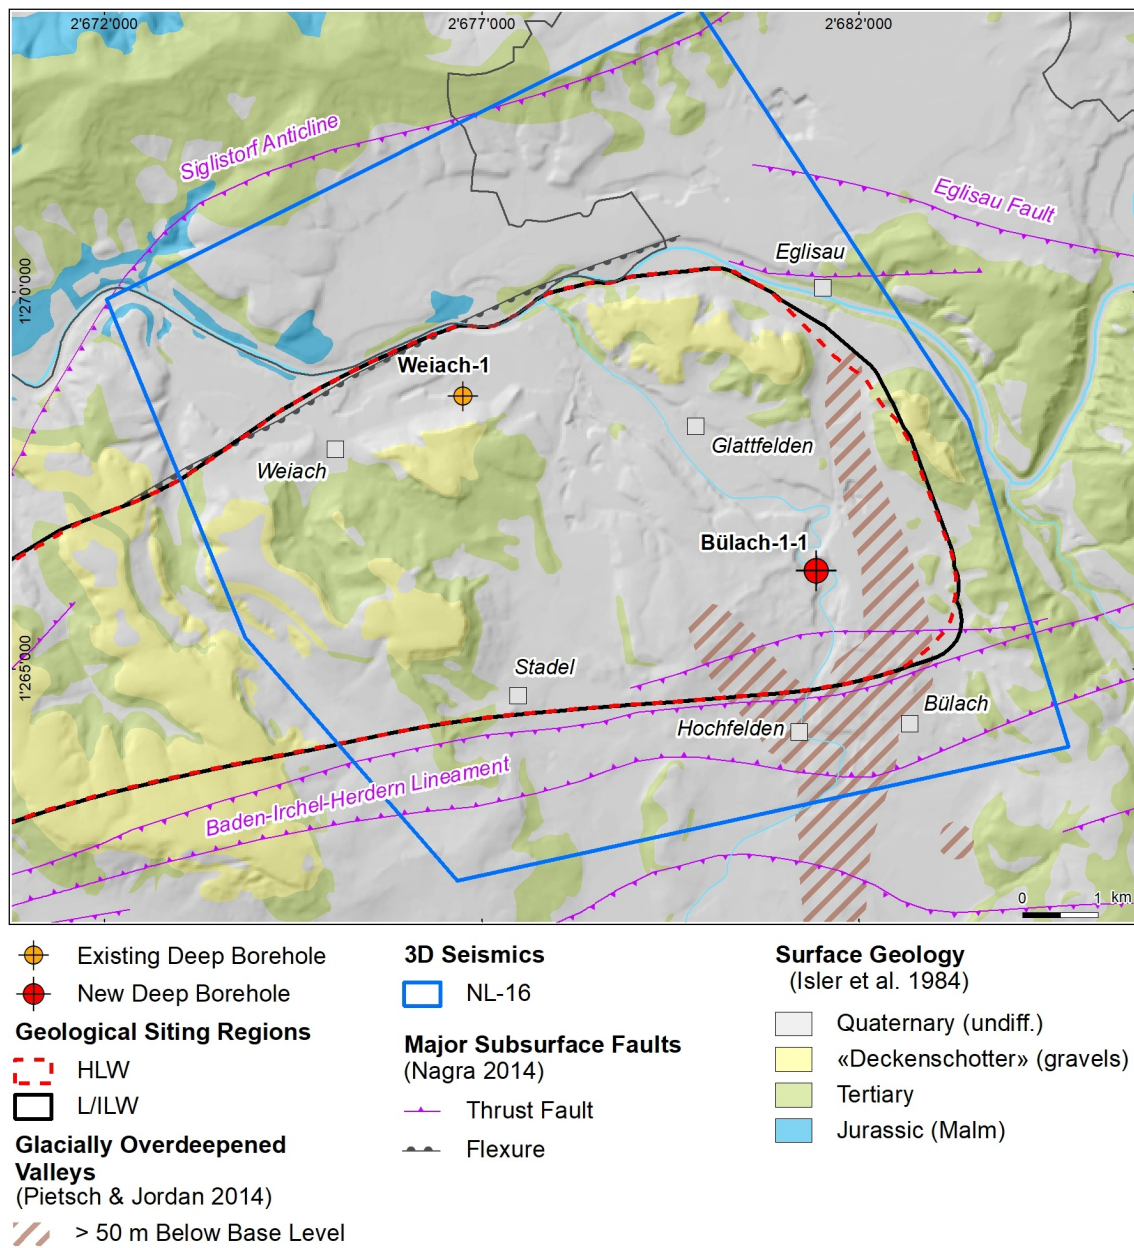


Fig. 1-2: Overview map of the investigation area in the Nördlich Lägern siting region with the location of the BUL1-1 borehole and the existing Weiach-1 borehole

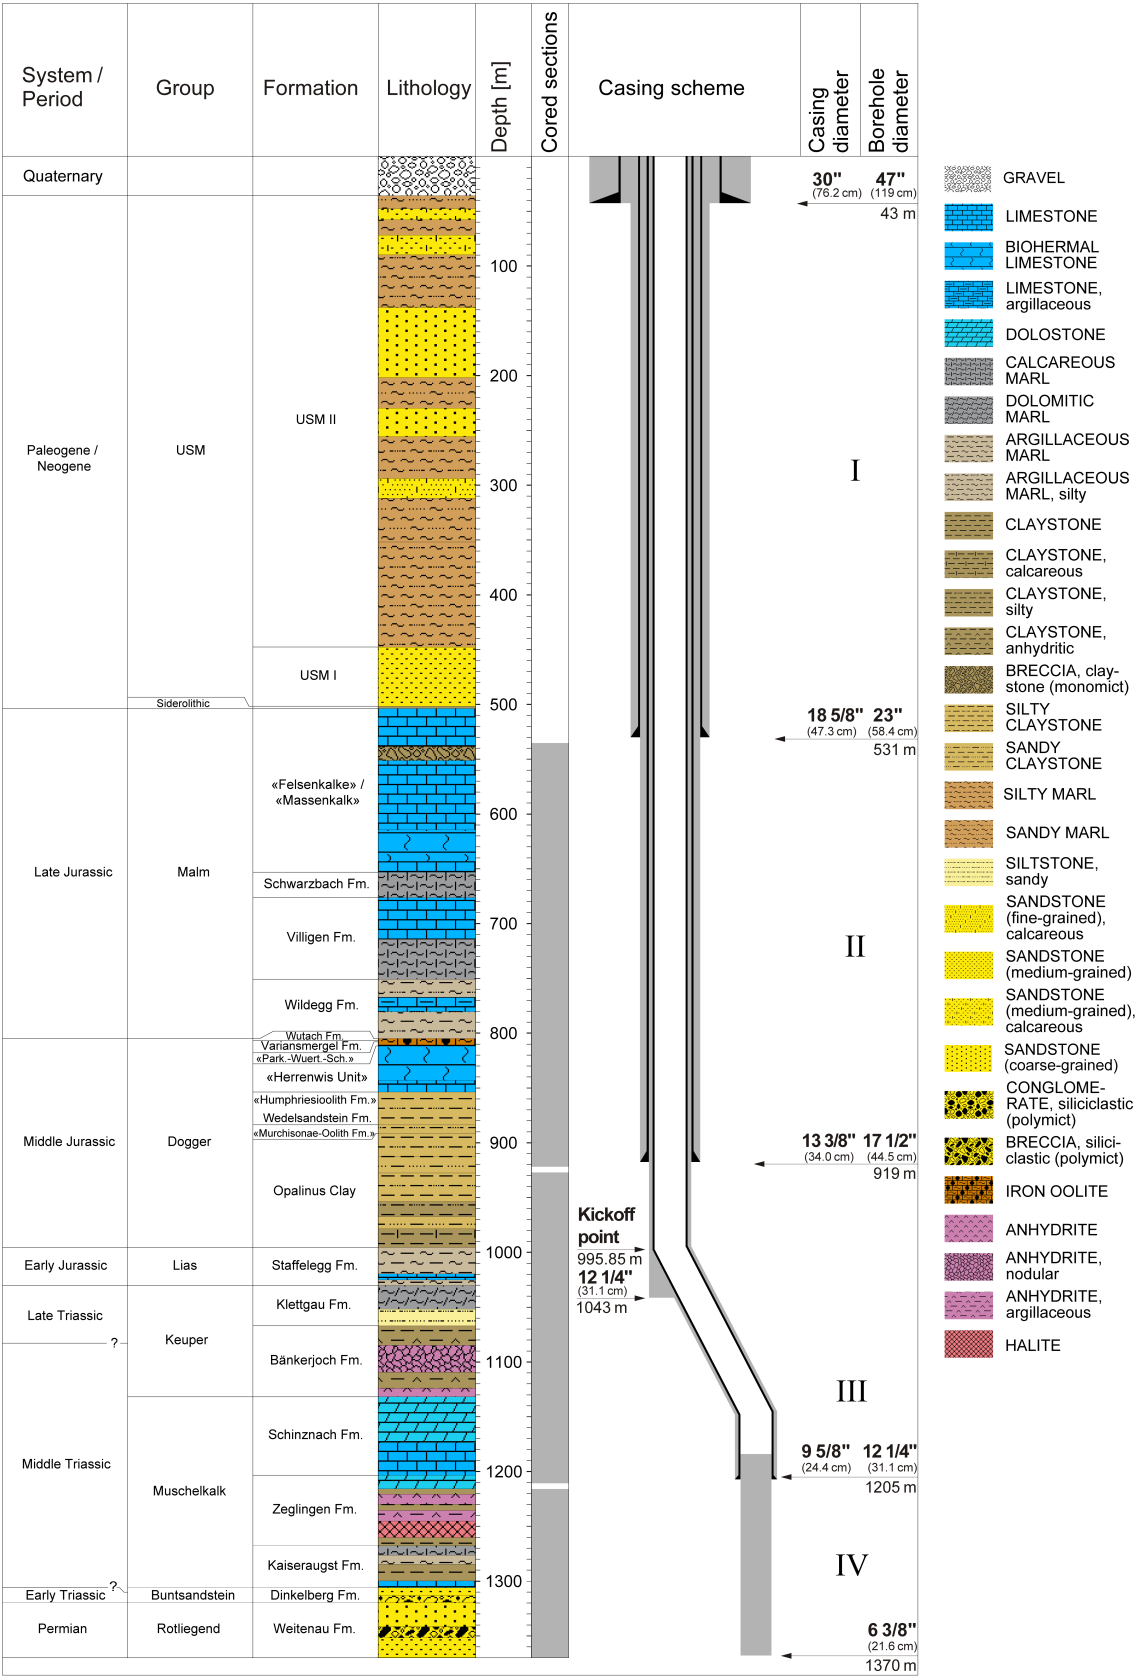


Fig. 1-3: Lithostratigraphic profile and casing scheme for the BUL1-1 borehole

1.3 Documentation structure for the BUL1-1 borehole

NAB 20-08 documents the majority of the investigations carried out in the BUL1-1 borehole, including laboratory investigations on core material. The NAB comprises a series of stand-alone dossiers addressing individual topics and a final dossier with a summary composite plot (Tab. 1-2).

This borehole documentation aims at early publication of the data collected in the BUL1-1 borehole. It includes the majority of the data available approximately one year after completion of the borehole. Some analyses are still ongoing (e.g. diffusion experiments, analysis of veins, hydrochemical interpretation of water samples) and will be published in separate reports.

The current borehole report will provide an important basis for the integration of datasets from different boreholes. The integration and interpretation of the results in the wider geological context will be documented later in separate geoscientific reports.

Tab. 1-2: List of dossiers included in NAB 20-08

Black marks the dossier at hand.

Dossier	Title	Authors
I	TBO Bülach-1-1: Drilling	M. Ammen & P.-J. Palten
II	TBO Bülach-1-1: Core Photography	D. Kaehr & M. Gysi
III	TBO Bülach-1-1: Lithostratigraphy	P. Jordan, H. Naef, P. Schürch, M. Schwarz, T. Ibele, R. Felber & M. Gysi
IV	TBO Bülach-1-1: Microfacies, Bio- and Chemostratigraphic Analysis	S. Wohlwend, H.R. Bläsi, S. Feist-Burkhardt, B. Hostettler, U. Menkveld-Gfeller, V. Dietze & G. Deplazes
V	TBO Bülach-1-1: Structural Geology	A. Ebert, L. Gregorczyk, E. Hägerstedt & M. Gysi
VI	TBO Bülach-1-1: Wireline Logging and Microhydraulic Fracturing	R. Garrard, J. Gonus, J. Desroches & E. Bailey
VII	TBO Bülach-1-1: Hydraulic Packer Testing	R. Schwarz, L. Schlickenrieder & T. Vogt
VIII	TBO Bülach-1-1: Rock Properties, Porewater Characterisation and Natural Tracer Profiles	M. Mazurek, L. Aschwanden, L. Camesi, T. Gimmi, A. Jenni, M. Kiczka, U. Mäder, D. Rufer, H.N. Waber, P. Wanner, P. Wersin & D. Traber
IX	TBO Bülach-1-1: Rock-mechanical and Geomechanical Laboratory Testing	E. Crisci, L. Laloui & S. Giger
X	TBO Bülach-1-1: Petrophysical Log Analysis	S. Marnat & J.K. Becker
	TBO Bülach-1-1: Summary Plot	Nagra

1.4 Scope and objectives of this dossier

In this dossier, the most important results are summarised in the form of a composite plot (Appendix A). A short technical explanation of the information displayed is given in Chapter 2, column by column from left to right.

2 Short explanation of the attached summary plot

2.1 Metres MD

Measured depth (MD) refers to the position along the borehole trajectory, starting at ground level, which for the TBO boreholes is the top of the rig cellar. For a perfectly vertical borehole, MD below ground level (bgl) and true vertical depth (TVD) are the same. All information shown in the summary plot refers to MD.

2.2 System / Period / Group / Formation / Member

Detailed information regarding the lithostratigraphic classification can be found in Dossier III.

2.3 Depth interval (core depth)

The numbers in this column refer to the position of the lithological boundaries displayed in the neighbouring columns in metres (m) MD core depth. Core depth refers to the depth marked on the drill cores.

2.4 Lithology

The displayed colours and patterns represent the primary lithology, simplified and upscaled from the original 1:100 to a 1:1'000 profile; for details see Dossier III.

2.5 Weathering plot with GR

The weathering plot visualises the relative resistance of different lithologies to weathering; the larger the bars in black from left to right, the more resistant the lithology to weathering. The different styles of the horizontal separation lines indicate different lithological boundary types; for details see Dossier III.

The total natural gamma ray (GR) measurement, a qualitative indicator for clay content and hence an indicator for weathering, is visualised for comparison in green. Please note that the scale is reversed (decreasing values from left to right) compared to the GR measurement displayed in the column "Natural gamma ray"; for details see Dossier VI.

2.6 Cuttings & core photos

Photos taken from cuttings and drill cores are shown in this column. Please note that the scale of the photos is different for the x- and the y-axis in order to fit the plot; white gaps represent sections where no drill cores were obtained (e.g. for technical reasons). The reference is the core depth as displayed in the column "Lithology". For a high-resolution version of these photos see Dossier II.

2.7 Cored interval

This column indicates which sections of the borehole were (wireline) cored and which were drilled destructively, resulting in cuttings. Please note that smaller core losses are not indicated in this column; for details see Dossier I.

2.8 Tadpole plot (bedding)

A tadpole plot is a graphical method for displaying the orientation of (in this case) bedding planes. The circles indicate the dip angle of the bedding at the respective positions (between 0° = horizontal and 90° = vertical) and the lines originating from the circles indicate the dip direction of the bedding (upwards = north, right = east, down = south, left = west).

Green stands for undifferentiated bedding, red for cross-bedding and magenta for deformed bedding. Unfilled circles show sections where correct core orientation (with the help of the FMI based on core goniometry) was not possible and therefore the dip azimuth, even though displayed, refers to an artificial true north. The dip, however, is correct for these features; for details see Dossier V.

2.9 Fracture density class

Where (parts of) the drill cores were heavily disintegrated it was not possible to accurately assess the density of natural fractures. For these sections the fracture density was estimated using the classification scheme of Bauer et al. (2016): fracture density class (FDC) 2 in orange (spacing of fractures = 5 – 10 cm), FDC 3 in dark orange with vertical lines (spacing of fractures = 1 – 5 cm), FDC 4 in red (spacing of fractures < 1 cm); for details see Dossier V.

2.10 P32 fault & fracture density

The parameters displayed in these columns were recorded separately for brittle structures with shear indications and brittle structures without shear or slip indications. The so-called P32 value is obtained by dividing the summarised discontinuity area along the drill cores by the volume. Therefore, the P32 value reflects the area of discontinuities per unit of rock volume (m^2/m^3), possibly highlighting the degree of tectonic overprinting. A high P32 value for fault planes, for example, can indicate the presence and position of a fault zone; for details see Dossier V.

2.11 Casing

Details regarding the drilling process (such as bit size, casing diameter, cementation scheme, etc.) can be found in Dossier I. Please note that in this plot only the sidetrack drilled from the kickoff point at 995.85 m is displayed and not the initial, cement-plugged borehole (see Fig. 1.3).

2.12 Caliper

The caliper measurement performed during geophysical wireline logging gives the diameter of the borehole in inches (1 inch = 2.54 cm) at the time of measurement for several (here 6) azimuthal directions obtained by different measurement arms (RD1 to RD6); for details see Dossier VI.

BS stands for bit size. In a perfect borehole, the measured diameter from the caliper log should equal the bit size. Strongly simplified, variations in the borehole diameter, such as washouts and breakouts, can be associated with the drilling process and/or result from unstable borehole sections. Some borehole measurements can be affected by variations in the borehole diameter.

2.13 Resistivity

The resistivity measurement performed during geophysical wireline logging gives the electrical resistivities at different depths of investigation in the formation in Ohm metres (ohmm). Processing allows the extrapolation of the resistivity measurements far into the formation, providing the true formation resistivity (RT_HRLT), as well as close to the tool, providing the micro-resistivity or resistivity close to the borehole wall (RXO_HRLT).

Less resistive formations, for example, can indicate a higher clay content and/or a higher porosity filled with conductive fluids (such as saline porewater); for details see Dossier VI.

2.14 FMI static

The formation microimager (FMI) provides a high-resolution, micro-resistivity measurement of the borehole wall performed during geophysical wireline logging, showing not only changes in lithology (brighter = more resistive), but (on a smaller scale) also discontinuities in the case of mineral or fluid filling; for details see Dossier VI.

The 360° measurement result from the borehole wall is displayed as an unwrapped, planar plot with the 180° mark indicating the side of the borehole facing towards south. Due to the unwrapping, discontinuities (inclined compared to the borehole axis) can be identified as sinusoidal curves, which can be used to assess the dip direction and the dip angle of the associated discontinuities. For a vertical borehole, the amplitude of the curves is smaller the more horizontal the orientation of the intersecting discontinuity is.

Among others, the FMI was used for the core goniometry (*cf.* column "Tadpole plot – bedding") and the analysis of breakouts and drilling-induced fractures (*cf.* column "Stress indicators").

2.15 Neutron porosity / Density

This column shows results from the geophysical wireline logging using a radioactive neutron source for assessing the porosity and a radioactive gamma source for obtaining bulk densities of the rock formations surrounding the borehole. After corrections, the displayed results are:

- represented as dark blue lines: epithermal neutron hydrogen index (APLC) as a proportion of the total volume (v/v), which times 100 equals a percentage; a measurement of the "neutron porosity", with higher values possibly indicating more porous lithologies (pore-filling water contains hydrogen). The "neutron porosity" is also influenced by the clay content, hydrogen-rich minerals, hydrocarbons and chlorine-rich formation fluids.
- represented as a black line: high resolution bulk densities (RHO8) in grams per cubic centimetre (g/cc), a measurement of the bulk density of the formation (minerals and fluid volumes). Higher values can indicate lower porosity or denser minerals.

Bulk density is usually used in combination with "neutron porosity" to quantify the fluid volume (porosity), as a lithological indicator (e.g. clays, limestone, dolostone, sandstone, anhydrite, salt) and as fluid indicator (pores filled with water, gas or hydrocarbons).

2.16 Natural gamma ray / Temperature

A standard measurement during geophysical wireline logging, used as an indicator for clay content and for depth calibration by identifying lithological marker horizons, is the natural total gamma ray (GR) measurement. By measuring the total natural gamma radiation along the borehole, GR gives an indication of the clay content of the rock formations surrounding the borehole. The further left the line or the higher the number on the American Petroleum Institute calibrated scale (API), the higher the GR measurement, which usually correlates with higher clay contents.

The temperature measurement during geophysical wireline logging gives the temperature of the fluid-filled borehole in degrees Celsius (degC). Besides the maximum temperature, this measurement can deliver indications of permeable zones of in- and outflow in open (uncased) borehole sections, especially if the borehole conditions after completion are undisturbed.

The temperature measurements shown were performed several months after the completion of the borehole in order to obtain an as undisturbed temperature profile as possible.

2.17 Clay mineral content

The black circles show the clay mineral content in weight percent (wt.-%) obtained from laboratory measurements on rock samples; for details see Dossier VIII.

The black curve represents the clay mineral content in weight percent (wt.-%) obtained from a combined interpretation ("multi-mineral interpretation") of several geophysical wireline logging measurements and available laboratory measurements on core samples. In the case of data gaps in the geophysical wireline logging, data from a Multi-Sensor-Core-Logger (MSCL) were taken into account; for details see Dossier X.

2.18 Multi-mineral interpretation

This column shows the "multi-mineral interpretation" (MM) of the mineral content in weight percent (wt.-%) as a stacked overview plot. For the MM, data from geophysical wireline logging and laboratory measurements on core samples as well as measurements with a Multi-Sensor-Core-Logger (MSCL) are taken into account; for details see Dossier X.

Displayed are the following minerals: pyrite (MM_PYRITE), siderite (MM_SIDER), halite (MM_HALITE), anhydrite (MM_ANHYDR), calcite (MM_CALCITE), dolomite (MM_DOLOMITE), silicates² (MM_SILICATES) and clay minerals (MM_DRY_CLAY).

2.19 Clay mineralogy

Displayed is the content of the individual clay minerals in weight percent (wt.-%) obtained from laboratory measurements on core samples; for details see Dossier VIII.

Displayed are the following clay minerals: chlorite (CM_CHLORITE), kaolinite (CM_KAOLINITE), smectite (CM_SMECTITE) and illite (CM_ILLITE).

² quartz and feldspars

2.20 Porosity

This track combines the porosities derived from "multi-mineral interpretation" and laboratory measurements on core samples.

The black circles indicate the water loss porosity in percent (%) obtained from laboratory measurements on core samples. The displayed values are calculated based on gravimetric water content (oven dried at 105 °C) and bulk wet density; for details see Dossier VIII.

The dark blue curve represents the result of the "multi-mineral interpretation" of porosity as a volume fraction (v/v), which times 100 equals a percentage; for details see Dossier X.

2.21 Chloride

The black circles show the chloride content in mg/L of porewater (based on aqueous extraction scaled to anion-accessible porosity); horizontal black lines represent the propagated analytical error. The blue rectangles give the results from groundwater samples taken from the borehole during pumping tests; vertical blue lines mark the length of the test interval. For details see Dossier VIII.

2.22 Stable isotopes of porewater ($\delta^2\text{H}$, $\delta^{18}\text{O}$)

The circles with error bars represent the porewater stable isotope composition ($\delta^2\text{H}$, $\delta^{18}\text{O}$ in ‰ V-SMOW) based on the diffusive-exchange method; horizontal orange or blue lines represent the analytical error. The rectangles show the results from water samples taken from the borehole during pumping tests; vertical blue lines mark the length of the test interval. For details see Dossier VIII.

2.23 Hydraulic conductivity

In this column the hydraulic conductivity obtained from hydraulic packer testing is presented. Note that hydraulic conductivity was calculated from the measured transmissivity by division by the interval length. The vertical lines indicate the depth of the measurement interval in the borehole. The $\log(10^x)$ of hydraulic conductivity is given in metres per second (m/s). The parameter range is shown with horizontal error bars and the best estimate with a black circle; lower hydraulic conductivity plot on the left and higher hydraulic conductivity plot on the right side of this column; for details see Dossier VII.

The circles illustrate hydraulic conductivities derived from oedometric laboratory tests. Blue circles denote values calculated from the consolidation theory and red circles denote values obtained from constant head tests. For details see Dossier IX.

2.24 (Apparent) hydraulic head

In this column the (apparent) hydraulic head obtained from hydraulic packer testing is presented. The vertical lines indicate the depth of the measurement interval in the borehole. The results are given in metres above sea-level (m asl) and hydraulic head is shown as freshwater head. The horizontal error bars show the range of parameters and the black circle the best estimate. The height of the ground level at the position of the borehole is marked with a dashed vertical line; for details see Dossier VII.

2.25 Sonic / Peak strength

The velocities of seismic waves (V_p) travelling through the different rock formations surrounding the borehole can be derived from sonic measurements performed during geophysical wireline logging. These measurements are used, for example, to assess rock strength properties and to support the calibration of seismic surveys. The results are given in metres per second (m/s) with e.g. porous or fractured lithologies usually showing slower travel times; for details see Dossier VI.

These logging results from the sonic scanner are compared to ultrasonic measurements on rock samples in the laboratory (perpendicular to bedding). Besides velocity (V_p) measurements in triaxial configurations (indicated by red circles), the uniaxial compressive strength test results (indicated by black squares) in Megapascal (MPa) are also shown for comparison. Typically, higher values correlate with higher velocities and indicate stronger lithologies; for details see Dossier IX.

2.26 Stress magnitudes

The blue curve represents the vertical stress (SV) in Megapascal (MPa) from integrated density according to Dossier VI.

The black circles indicate the position of microhydraulic fracturing measurements in the borehole giving closure pressures in Megapascal (MPa) with error bars, which under certain conditions can be interpreted as the minimum principal stress magnitudes. Additionally, the closure pressure in relation to the vertical stress can give an indication of the stress regime; for details see Dossier VI.

2.27 Stress indicators

Borehole wall images obtained during geophysical wireline logging (i.e. using the FMI) are used in post-processing to identify so-called stress indicators; their position on the 360° borehole wall is shown in this column.

One can differentiate between breakouts (indicated by red circles) and centreline fractures (black circles). Drilling-induced fractures are typically orientated in the direction of the maximum horizontal stress and breakouts perpendicular to this direction.

3 References

- Bauer, H., Schröckenfuchs, T. & Decker, K. (2016): Hydrogeological properties of fault zones in a karstified carbonate aquifer (Northern Calcareous Alps, Austria). *Hydrogeology Journal* 24, 1147-1170.
- Isler, A., Pasquier, F. & Huber, M. (1984): Geologische Karte der zentralen Nordschweiz 1:100'000. Herausgegeben von der Nagra und der Schweiz. Geol. Komm.
- Naef, H., Büchi, M., Bläsi, H.R., Deplazes, G. & Gysi, M. (2019): Lithology Manual – Lithological description of drill cores and cuttings in Northern Switzerland. Nagra Arbeitsbericht NAB 19-11.
- Nagra (2014): SGT Etappe 2: Vorschlag weiter zu untersuchender geologischer Standortgebiete mit zugehörigen Standortarealen für die Oberflächenanlage. Geologische Grundlagen. Dossier II: Sedimentologische und tektonische Verhältnisse. Nagra Technischer Bericht NTB 14-02.
- Pietsch, J. & Jordan, P. (2014): Digitales Höhenmodell Basis Quartär der Nordschweiz – Version 2013 (SGT E2) und ausgewählte Auswertungen. Nagra Arbeitsbericht NAB 14-02.