

# **Arbeitsbericht NAB 21-22**

**TB0 Bözberg-2-1:  
Data Report**

**Dossier X  
Petrophysical Log Analysis**

April 2022

**National Cooperative  
for the Disposal of  
Radioactive Waste**

Hardstrasse 73  
P.O. Box 280  
5430 Wettingen  
Switzerland  
Tel. +41 56 437 11 11

[www.nagra.ch](http://www.nagra.ch)



# **Arbeitsbericht NAB 21-22**

**TB0 Bözberg-2-1:  
Data Report**

**Dossier X  
Petrophysical Log Analysis**

April 2022

S. Marnat<sup>1</sup> & J.K. Becker<sup>2</sup>

<sup>1</sup>Ad Terra Energy

<sup>2</sup>Nagra

**Keywords:**

BOZ2-1, Jura Ost, TB0, deep drilling campaign, stochastic log interpretation, MultiMin analyses, petrophysical logs, lab data, Multi-Sensor Core Logger, MSCL, mineralogy, clay content, clay typing, porosity

**National Cooperative  
for the Disposal of  
Radioactive Waste**

Hardstrasse 73  
P.O. Box 280  
5430 Wettingen  
Switzerland  
Tel. +41 56 437 11 11

[www.nagra.ch](http://www.nagra.ch)

Nagra Arbeitsberichte ("Working Reports") present the results of work in progress that have not necessarily been subject to a comprehensive review. They are intended to provide rapid dissemination of current information.

This NAB aims at reporting drilling results at an early stage. Additional borehole-specific data will be published elsewhere.

In the event of inconsistencies between dossiers of this NAB, the dossier addressing the specific topic takes priority. In the event of discrepancies between Nagra reports, the chronologically later report is generally considered to be correct. Data sets and interpretations laid out in this NAB may be revised in subsequent reports. The reasoning leading to these revisions will be detailed there.

This Dossier was prepared by a project team consisting of:

S. Marnat (data analyses, interpretation and writing)

J.K. Becker (project administration and writing)

Editorial work: P. Blaser and M. Unger

The Dossier has greatly benefitted from technical discussions with, and reviews by, internal experts. Their input and work are very much appreciated.

"Copyright © 2022 by Nagra, Wetztingen (Switzerland) / All rights reserved.

All parts of this work are protected by copyright. Any utilisation outwith the remit of the copyright law is unlawful and liable to prosecution. This applies in particular to translations, storage and processing in electronic systems and programs, microfilms, reproductions, etc."



## Table of Contents

|                                                                                                      |           |
|------------------------------------------------------------------------------------------------------|-----------|
| Table of Contents .....                                                                              | I         |
| List of Tables.....                                                                                  | II        |
| List of Figures .....                                                                                | II        |
| List of Appendices .....                                                                             | III       |
| List of Plates.....                                                                                  | III       |
| Abbreviations .....                                                                                  | IV        |
| <b>1 Introduction .....</b>                                                                          | <b>1</b>  |
| 1.1 Context.....                                                                                     | 1         |
| 1.2 Location and specifications of the borehole .....                                                | 2         |
| 1.3 Documentation structure for the BOZ2-1 borehole .....                                            | 6         |
| 1.4 Scope and objectives of this dossier .....                                                       | 7         |
| <b>2 Data preparation.....</b>                                                                       | <b>9</b>  |
| 2.1 Used log data .....                                                                              | 9         |
| 2.2 Used core data .....                                                                             | 12        |
| 2.3 Multi-sensor Core Logger (MSCL) data .....                                                       | 12        |
| 2.4 MultiMin input dataset preparation .....                                                         | 15        |
| 2.5 Preliminary calculations (Precalc).....                                                          | 15        |
| <b>3 Petrophysical log interpretation .....</b>                                                      | <b>17</b> |
| 3.1 MultiMin interpretation .....                                                                    | 17        |
| 3.2 Bad hole treatment and quality of results .....                                                  | 24        |
| 3.2.1 Indicator for input data quality (LQC_INDEX) .....                                             | 24        |
| 3.2.2 Indicator for the mathematical model (CONDNUM and NFUN) .....                                  | 25        |
| 3.2.3 Indicator for the MultiMin interpretation results<br>(MULT_QC and QUALITY) .....               | 25        |
| <b>4 Results of the calibrated stochastic log interpretation .....</b>                               | <b>27</b> |
| 4.1 Comparison of interpretation results with core data .....                                        | 27        |
| 4.2 Main results of the core-calibrated log analyses in the BOZ2-1 borehole.....                     | 34        |
| 4.3 Main results of the core-calibrated log analysis in the Opalinus Clay<br>(451.9 – 573.89 m)..... | 37        |
| <b>5 Summary .....</b>                                                                               | <b>45</b> |
| <b>6 References.....</b>                                                                             | <b>47</b> |

## List of Tables

|           |                                                                                            |    |
|-----------|--------------------------------------------------------------------------------------------|----|
| Tab. 1-1: | General information about the BOZ2-1 borehole.....                                         | 2  |
| Tab. 1-2: | Core and log depth for the main lithostratigraphic boundaries in the BOZ2-1 borehole ..... | 5  |
| Tab. 1-3: | List of dossiers included in NAB 21-22 .....                                               | 6  |
| Tab. 2-1: | Precalc parameters used in BOZ2-1 .....                                                    | 16 |
| Tab. 3-1: | List of MultiMin models used in BOZ2-1 .....                                               | 18 |

## List of Figures

|           |                                                                                                                                                                     |    |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Fig. 1-1: | Tectonic overview map with the three siting regions under investigation .....                                                                                       | 1  |
| Fig. 1-2: | Overview map of the investigation area in the Jura Ost siting region with the location of the BOZ2-1 borehole in relation to the boreholes Riniken and BOZ1-1 ..... | 3  |
| Fig. 1-3: | Lithostratigraphic profile and casing scheme for the BOZ2-1 borehole .....                                                                                          | 4  |
| Fig. 2-1: | Petrophysical log availability and gaps in the BOZ2-1 borehole .....                                                                                                | 11 |
| Fig. 2-2: | XRF (black dots) and ECS WALK2 (red curves) elements comparison.....                                                                                                | 13 |
| Fig. 2-3: | Core (black dots: spectral gamma ray) and wireline HNGS (red curves) spectral gamma ray elements comparison .....                                                   | 14 |
| Fig. 3-1: | HNGS potassium (HFK) versus MSCL potassium in BOZ2-1 .....                                                                                                          | 21 |
| Fig. 3-2: | HNGS thorium (HTHO) versus MSCL thorium in BOZ2-1 .....                                                                                                             | 22 |
| Fig. 3-3: | TLD bulk density (RHOZ) versus MSCL bulk density in BOZ2-1 .....                                                                                                    | 23 |
| Fig. 4-1: | Weight % of dry clay (y-axis) compared to core XRD data (x-axis), Wildegg to Bänkerjoch Formation .....                                                             | 28 |
| Fig. 4-2: | Weight % of not potassic dry clay (y-axis) compared to core XRD data (x-axis) (XRD data in the Passwang to Staffelegg Formation) .....                              | 29 |
| Fig. 4-3: | Weight of illite (y axis) compared to core XRD data (x axis), XRD data in the Passwang to Staffelegg Formation) .....                                               | 30 |
| Fig. 4-4: | Weight % of QF-silicates (y axis) compared to core XRD data (x axis), Wildegg to Bänkerjoch Formation .....                                                         | 31 |
| Fig. 4-5: | Weight % of carbonates (y axis) compared to core XRD data (x axis), Wildegg to Bänkerjoch Formation .....                                                           | 32 |
| Fig. 4-6: | Total porosity (v/v, y axis) compared to core data (x axis), Wildegg to Bänkerjoch Formation .....                                                                  | 33 |
| Fig. 4-7: | Dry clay weight percentage frequency histogram in the Opalinus Clay.....                                                                                            | 37 |
| Fig. 4-8: | Dry clay weight percentage frequency histogram in the upper section of the Opalinus Clay (above 520.5 m) .....                                                      | 38 |

|            |                                                                                                                |    |
|------------|----------------------------------------------------------------------------------------------------------------|----|
| Fig. 4-9:  | Dry clay weight percentage frequency histogram in the lower section of the Opalinus Clay (below 520.5 m) ..... | 39 |
| Fig. 4-10: | Calcite weight percentage frequency histogram in the Opalinus Clay .....                                       | 40 |
| Fig. 4-11: | Siderite weight percentage frequency histogram in the Opalinus Clay .....                                      | 41 |
| Fig. 4-12: | QF-silicates (quartz and feldspars) weight percentage frequency histogram in the Opalinus Clay .....           | 42 |
| Fig. 4-13: | Total porosity frequency histogram in the Opalinus Clay .....                                                  | 43 |
| Fig. 4-14: | Main log and core results in the Opalinus Clay .....                                                           | 44 |

## List of Appendices

|         |                                                  |
|---------|--------------------------------------------------|
| App. A: | Precalc parameters table                         |
| App. B: | List of MultiMin models                          |
| App. C: | Parameters used in the different MultiMin models |

## List of Plates

|          |                                                                           |
|----------|---------------------------------------------------------------------------|
| Plate 1: | Comparison of calculated log curves and measured petrophysical log curves |
| Plate 2: | Results of the core-calibrated petrophysical log interpretation           |

*Note: In the digital version of this report the appendices and plates can be found under the paper clip symbol.*

## Abbreviations

|            |                                                                                                |
|------------|------------------------------------------------------------------------------------------------|
| ANHYDR     | Anhydrite weight percentage from MultiMin                                                      |
| APLC       | Corrected neutron hydrogen index from APS (limestone matrix)                                   |
| APLC_PRED  | APLC prediction by MultiMin                                                                    |
| APS        | Accelerator Porosity Sonde                                                                     |
| B/E        | Barns/Electron                                                                                 |
| BS         | Drilling / Coring Bit Size                                                                     |
| CALCITE    | Calcite weight percentage from MultiMin                                                        |
| CALI       | Caliper                                                                                        |
| CARBONATES | Carbonates weight percentage from MultiMin                                                     |
| CHLORITE   | Chlorite weight percentage from MultiMin                                                       |
| COAL       | Coal weight percentage from MultiMin                                                           |
| COMPOSITE  | Composite log, validated logs dataset                                                          |
| CONDNUM    | MultiMin model condition number                                                                |
| CT         | Conductivity in the formation                                                                  |
| CT_PRED    | CT prediction by MultiMin                                                                      |
| CU         | Capture Unit, unit for sigma                                                                   |
| CXO        | Conductivity in the invaded zone                                                               |
| CXO_PRED   | CXO prediction by MultiMin                                                                     |
| DENS       | Bulk density                                                                                   |
| DOLOMITE   | Dolomite weight percentage from MultiMin                                                       |
| DRHO       | Bulk density correction                                                                        |
| DRY_CLAY   | Dry clay weight percentage from MultiMin                                                       |
| dRRC       | Rush raw corrected data                                                                        |
| DTCO       | Compressional wave slowness from far monopole mid frequency source compressional wave slowness |
| DTCO_PRED  | DTCO prediction by MultiMin                                                                    |
| DTSM       | Shear wave slowness from inline X-Dipole (90°) source                                          |
| DTSM_PRED  | DTSM prediction by MultiMin                                                                    |
| DWAL_WALK2 | Dry weight fraction aluminium, ECS WALK2 closure model                                         |
| DWCA_WALK2 | Dry weight fraction calcium, ECS WALK2 closure model                                           |
| DWFE_WALK2 | Dry weight fraction iron, ECS WALK2 closure model                                              |
| DWFE_CORR  | Dry weight fraction iron, calibrated to XRF iron content                                       |
| DWSI_WALK2 | Dry weight fraction silicon, ECS WALK2 closure model                                           |

|                        |                                                                |
|------------------------|----------------------------------------------------------------|
| DWSU_WALK2             | Dry weight fraction sulphur, ECS WALK2 closure model           |
| DWTI_WALK2             | Dry weight fraction titanium from ECS, ECS WALK2 closure model |
| DWAL_MGWALK            | Dry weight fraction aluminium, ECS MGWALK closure model        |
| DWCA_MGWALK            | Dry weight fraction calcium, ECS MGWALK closure model          |
| DWFE_MGWALK            | Dry weight fraction iron, ECS MGWALK closure model             |
| DWMG_MGWALK            | Dry weight fraction magnesium, ECS MGWALK closure model        |
| DWSI_MGWALK            | Dry weight fraction silicon, ECS MGWALK closure model          |
| DWSU_MGWALK            | Dry weight fraction sulphur, ECS MGWALK closure model          |
| DWTI_MGWALK            | Dry weight fraction titanium, ECS MGWALK closure model         |
| ECS                    | Elemental Capture Spectroscopy                                 |
| EDTC                   | Enhanced Digital Telemetry Cartridge                           |
| EMS                    | Environment Measurement Sonde                                  |
| FE_MIN                 | Iron-rich minerals (Siderite, pyrite, iron oxides)             |
| FLAG_BADHOLE_DN        | Badhole flag from the Density-Neutron crossplot                |
| FLAG_BADHOLE_OVERGAUGE | Badhole flag from the Caliper                                  |
| FLAG_BADHOLE_RUGO      | Badhole flag from the Density correction                       |
| FLAG_BADHOLE_STOF      | Badhole flag from the Neutron stand-off                        |
| FMI                    | Fullbore Formation Microimager                                 |
| g/cm <sup>3</sup>      | Gram per cubic centimetre                                      |
| GAPI                   | Unit of radioactivity used for natural Gamma Ray logs          |
| GEOLOG                 | Emerson software used for logs interpretation                  |
| GPCI                   | Geneva Petroleum Consultants International                     |
| GPIT                   | General Purpose Inclination Tool                               |
| GR                     | Total Gamma Ray                                                |
| GR_KCOR                | Total Gamma Ray corrected for mud potassium                    |
| GR_KCOR_PRED           | GR_KCOR prediction by MultiMin                                 |
| HAEMATITE              | Haematite weight percentage from MultiMin                      |
| HALITE                 | Halite weight percentage from MultiMin                         |
| HDAR                   | Hole diameter from area                                        |
| HDRA                   | Bulk density correction                                        |
| HFK                    | Potassium concentration from HNGS                              |
| HFK_DWK                | Potassium concentration from ECS                               |

|            |                                                                  |
|------------|------------------------------------------------------------------|
| HI         | Hydrogen Index                                                   |
| HNGS       | Hostile Natural Gamma Ray Sonde                                  |
| HRLT       | High Resolution Laterolog array Tool                             |
| HSGR       | HNGS Standard Gamma Ray                                          |
| HTHO       | Thorium concentration from HNGS                                  |
| HURA       | Uranium concentration from HNGS                                  |
| HURA_PRED  | HURA prediction by MultiMin                                      |
| ILLITE     | Illite weight percentage from MultiMin                           |
| KAOLIN     | Kaolinite weight percentage from MultiMin                        |
| KEROGEN    | Kerogen weight percentage from MultiMin                          |
| LEH.QT     | Logging Equipment Head with Tension                              |
| LQC_INDEX  | Log Quality Control Index                                        |
| MCFL       | Micro-Cylindrical Focused Log                                    |
| MHF        | Micro Hydraulic Fracturing                                       |
| MSCL       | Multi-sensor Core Logger                                         |
| MULT_QC    | MultiMin analysis quality flag                                   |
| MULTIMIN   | Multi mineral and multi fluid analysis module in Geolog software |
| m MD       | Metre Measured Depth                                             |
| MSIP       | Modular Sonic Imaging Platform                                   |
| NFUN       | Number of MultiMin iterations                                    |
| NO_K_CLAYS | Not potassic clays weight percentage from MultiMin               |
| ORTHOCL    | K-Feldspars weight percentage from MultiMin                      |
| p.u.       | Porosity unit                                                    |
| PEFZ       | Photoelectric factor                                             |
| PEFZ_PRED  | PEFZ prediction by MultiMin                                      |
| PHI_PICNO  | Core pycnometer porosity                                         |
| PHI_WL1    | Core water-loss porosity (105 °C) using bulk wet density         |
| PHI_WL2    | Core water-loss porosity (105 °C) using grain density            |
| PHIE       | Effective porosity                                               |
| PHIT       | Total porosity                                                   |
| PLAGIO     | Plagioclases weight percentage from MultiMin                     |
| PPC        | Power Positioning device and Caliper tool                        |
| PRECALC    | Precalculation module in the Geolog software                     |
| PYRITE     | Pyrite weight percentage from MultiMin                           |

|              |                                                                                                                                                     |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| QC           | Quality Control                                                                                                                                     |
| QF_SILICATES | Matrix quartz and feldspars weight percentage from MultiMin                                                                                         |
| QUALITY      | MultiMin analysis quality                                                                                                                           |
| QUARTZ       | Quartz weight percentage from MultiMin                                                                                                              |
| RCL          | Reduced Composite Log                                                                                                                               |
| RHGE_WALK2   | Matrix density from elemental concentrations (WALK2 model)                                                                                          |
| RHOB_CALC    | Bulk density computed from core data                                                                                                                |
| RHOG         | Grain density from MultiMin                                                                                                                         |
| RHOS         | Solids density                                                                                                                                      |
| RHOZ         | Bulk density                                                                                                                                        |
| RHOZ_PRED    | RHOZ prediction by MultiMin                                                                                                                         |
| RT_HRLT      | HRLT true formation resistivity                                                                                                                     |
| RUGO         | Borehole wall rugosity                                                                                                                              |
| RXOZ         | Invaded formation resistivity filtered at 18 inches                                                                                                 |
| SIDER        | Siderite weight percentage from MultiMin                                                                                                            |
| SIGF         | Macroscopic cross-section for the absorption of thermal neutrons, or capture cross-section, of a volume of matter, measured in capture units [c.u.] |
| SIGF_PRED    | SIGF prediction by MultiMin                                                                                                                         |
| SLB          | Abbreviation for Schlumberger Logging Company                                                                                                       |
| SP           | Spontaneous Potential                                                                                                                               |
| STOF         | APS Stand-Off                                                                                                                                       |
| SWE          | Effective water saturation                                                                                                                          |
| SWT          | Total water saturation                                                                                                                              |
| TLD          | Three-detector Lithology Density                                                                                                                    |
| TOC          | Total organic carbon [w/w or wt.-%]                                                                                                                 |
| U            | Photoelectric cross-section computed by Precalc [b/cc]                                                                                              |
| UBI          | Ultrasonic Borehole Imager                                                                                                                          |
| v/v          | Volume per volume                                                                                                                                   |
| VCL          | Volume of wet clay                                                                                                                                  |
| VOL_ANHYDR   | MultiMin volume of anhydrite                                                                                                                        |
| VOL_ANORTH   | MultiMin volume of plagioclase                                                                                                                      |
| VOL_CALCITE  | MultiMin volume of calcite                                                                                                                          |
| VOL_CHLOR    | MultiMin volume of chlorites                                                                                                                        |

|             |                                                                 |
|-------------|-----------------------------------------------------------------|
| VOL_DOLOM   | MultiMin volume of dolomite                                     |
| VOL_ILLITE  | MultiMin volume of illite                                       |
| VOL_ORTHOCL | MultiMin volume of potassic feldspars                           |
| VOL_SIDER   | MultiMin volume of siderite                                     |
| VP          | Compressional waves velocity [m/s]                              |
| VS          | Shear waves velocity [m/s]                                      |
| VPVS        | Compressional and shear waves velocity ratio                    |
| VPVS_INPUT  | Array Monte-Carlo input for VP/VS                               |
| WT.-%       | Weight concentration                                            |
| W/W         | Weight per weight, concentration                                |
| WANH_WALK2  | Dry weight fraction anhydrite/gypsum from ECS (WALK2 model)     |
| WCAR_WALK2  | Dry weight fraction carbonate from ECS (WALK2 model)            |
| WCLA_WALK2  | Dry weight fraction clay from ECS (WALK2 model)                 |
| WEVA_WALK2  | Dry weight fraction salt from ECS (WALK2 model)                 |
| WPYR_WALK2  | Dry weight fraction pyrite from ECS (WALK2 model)               |
| WQFM_WALK2  | Dry weight fraction quartz+feldspar+mica from ECS (WALK2 model) |
| WSID_WALK2  | Dry weight fraction siderite from ECS (WALK2 model)             |
| XRD         | X-Ray Diffraction                                               |
| μs/ft       | Microsecond per foot (unit for sonic slowness)                  |



# 1 Introduction

## 1.1 Context

To provide input for site selection and the safety case for deep geological repositories for radioactive waste, Nagra has drilled a series of deep boreholes ("Tiefbohrungen", TBO) in Northern Switzerland. The aim of the drilling campaign is to characterise the deep underground of the three remaining siting regions located at the edge of the Northern Alpine Molasse Basin (Fig. 1-1).

In this report, we present the results from the Bözberg-2-1 borehole.

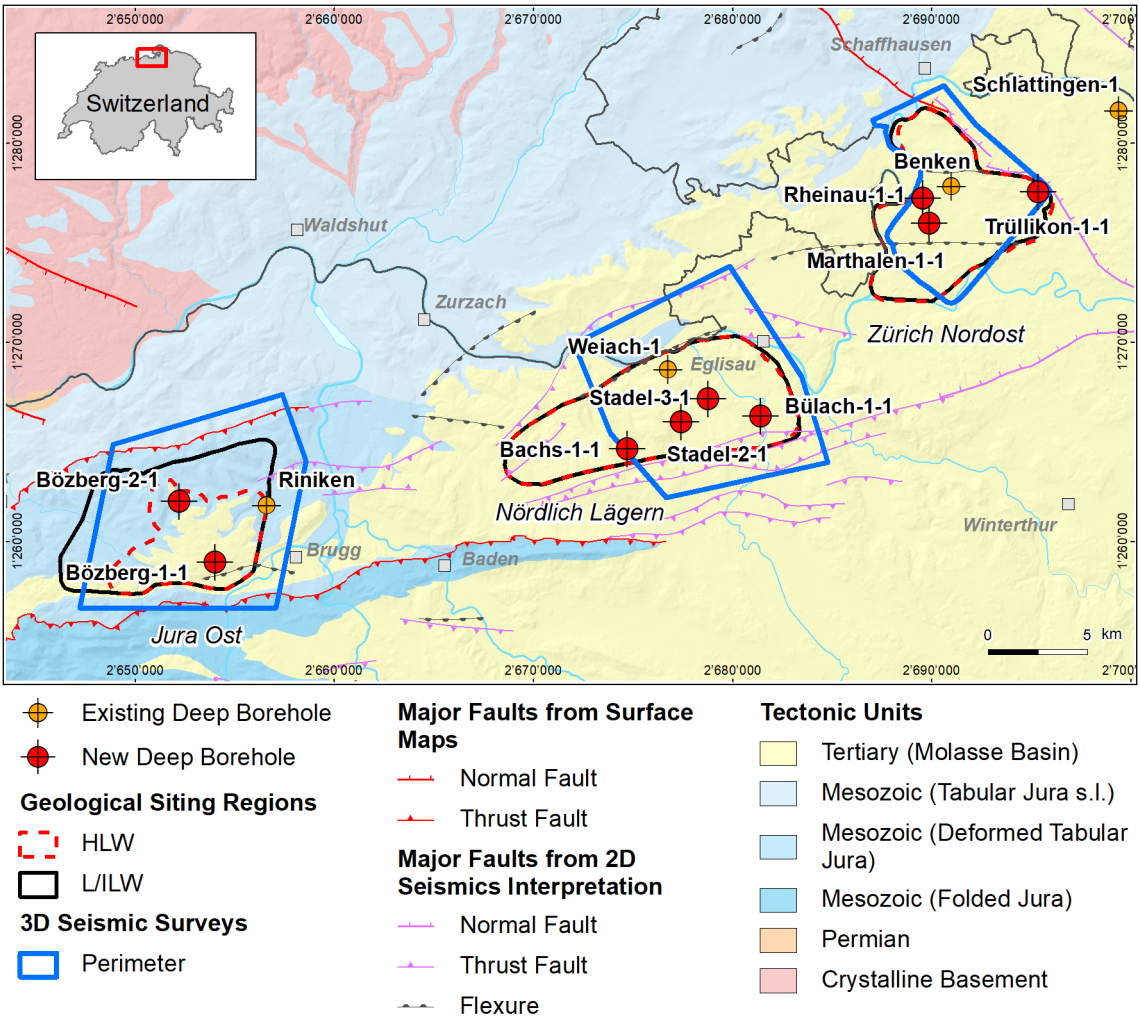


Fig. 1-1: Tectonic overview map with the three siting regions under investigation

## 1.2 Location and specifications of the borehole

The Bözberg-2-1 (BOZ2-1) exploratory borehole is the fifth borehole drilled within the framework of the TBO project. The drill site is located in the northern part of the Jura Ost siting region (Fig. 1-2). The vertical borehole reached a final depth of 829.11 m (MD)<sup>1</sup>. The borehole specifications are provided in Tab. 1-1.

Tab. 1-1: General information about the BOZ2-1 borehole

|                         |                                                                                                                                                                                                    |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Siting region</b>    | Jura Ost                                                                                                                                                                                           |
| <b>Municipality</b>     | Bözberg (Canton Aargau / AG), Switzerland                                                                                                                                                          |
| <b>Drill site</b>       | Bözberg-2 (BOZ2)                                                                                                                                                                                   |
| <b>Borehole</b>         | Bözberg-2-1 (BOZ2-1)                                                                                                                                                                               |
| <b>Coordinates</b>      | LV95: 2'652'218.764 / 1'261'985.437                                                                                                                                                                |
| <b>Elevation</b>        | Ground level = top of rig cellar: 624.33 m above sea level (asl)                                                                                                                                   |
| <b>Borehole depth</b>   | 829.11 m measured depth (MD) below ground level (bgl)                                                                                                                                              |
| <b>Drilling period</b>  | 11th August – 14th December 2020 (spud date to end of rig release)                                                                                                                                 |
| <b>Drilling company</b> | Daldrup & Söhne AG                                                                                                                                                                                 |
| <b>Drilling rig</b>     | Wirth B 152t                                                                                                                                                                                       |
| <b>Drilling fluid</b>   | Water-based mud with various amounts of different components such as <sup>2</sup> :<br>0 – 370 m: Bentonite & polymers<br>370 – 615 m: Potassium silicate & polymers<br>615 – 829.11 m: Pure-Bore® |

The lithostratigraphic profile and the casing scheme are shown in Fig. 1-3. The comparison of the core versus log depth<sup>3</sup> of the main lithostratigraphic boundaries in the BOZ2-1 borehole is shown in Tab. 1-2.

<sup>1</sup> Measured depth (MD) refers to the position along the borehole trajectory, starting at ground level, which for this borehole is the top of the rig cellar. For a perfectly vertical borehole, MD below ground level (bgl) and true vertical depth (TVD) are the same. In all Dossiers depth refers to MD unless stated otherwise.

<sup>2</sup> For detailed information see Dossier I.

<sup>3</sup> Core depth refers to the depth marked on the drill cores. Log depth results from the depth observed during geophysical wireline logging. Note that the petrophysical logs have not been shifted to core depth, hence log depth differs from core depth.

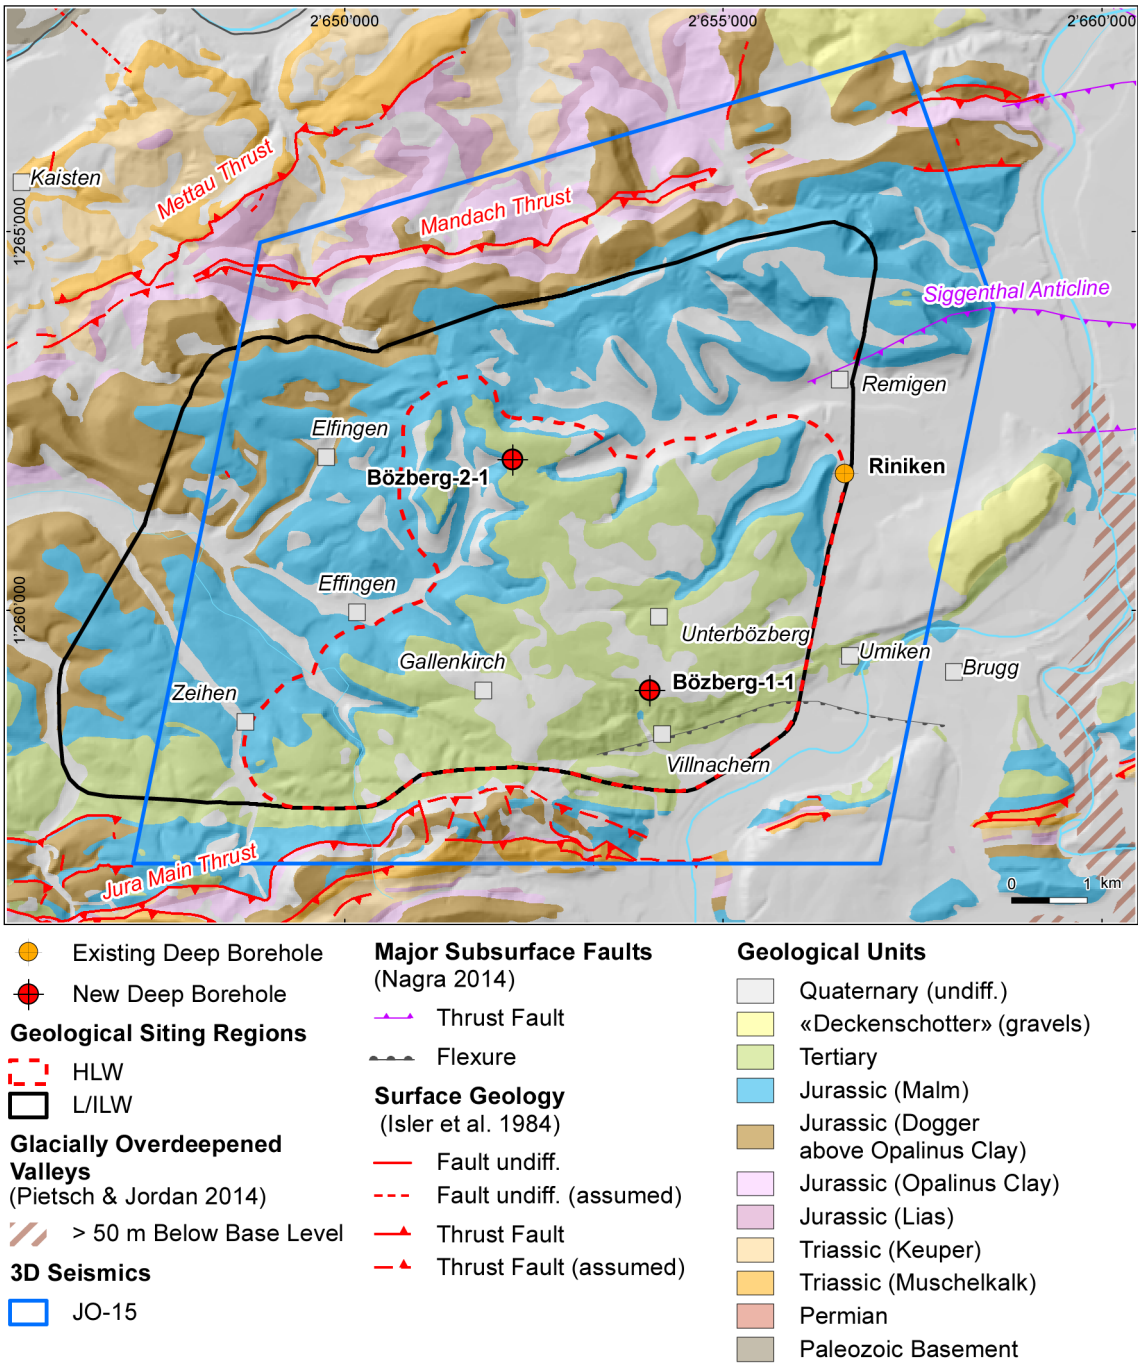


Fig. 1-2: Overview map of the investigation area in the Jura Ost siting region with the location of the BOZ2-1 borehole in relation to the boreholes Riniken and BOZ1-1

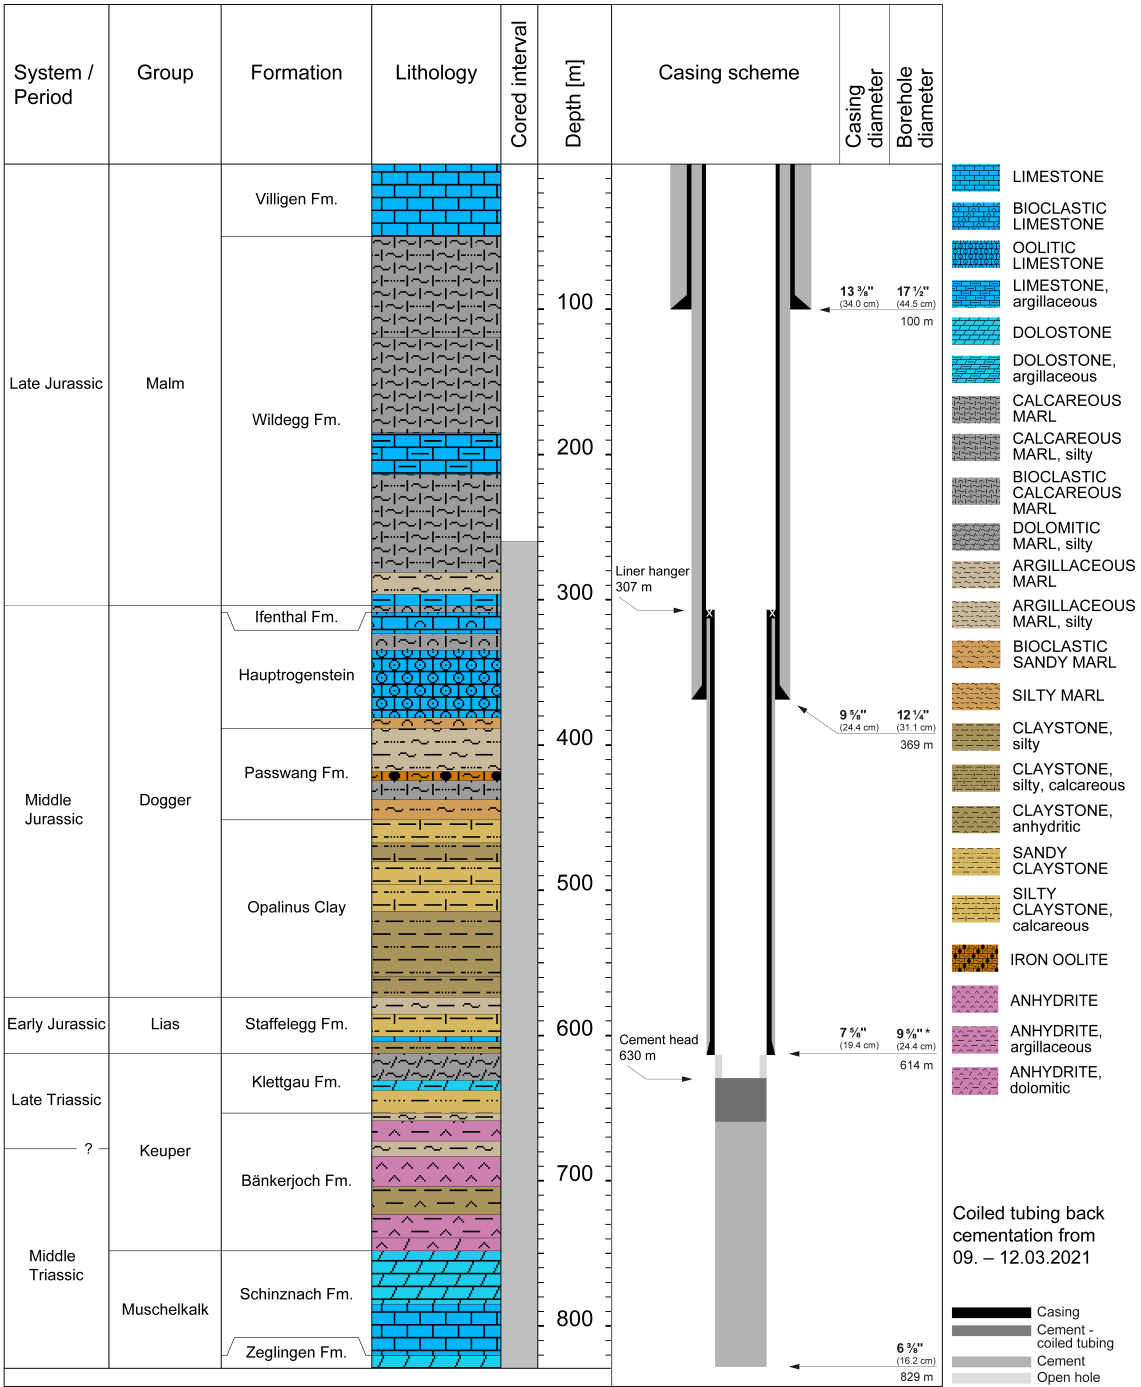


Fig. 1-3: Lithostratigraphic profile and casing scheme for the BOZ2-1 borehole<sup>4</sup>

<sup>4</sup> For detailed information see Dossier I and III.

Tab. 1-2: Core and log depth for the main lithostratigraphic boundaries in the BOZ2-1 bore-hole<sup>5</sup>

| System /<br>Period | Group       | Formation             | Core<br>depth in m (MD) | Log           |
|--------------------|-------------|-----------------------|-------------------------|---------------|
| Jurassic           | Malm        | Villigen Formation    |                         |               |
|                    |             | Wildeggen Formation   | 50.0                    |               |
|                    | Dogger      | Ifenthal Formation    | 303.95                  | 304.38        |
|                    |             | Hauptrogenstein       | 308.70                  | 309.07        |
|                    |             | Passwang Formation    | 388.54                  | 388.97        |
|                    |             | Opalinus Clay         | 451.54                  | 451.90        |
|                    |             |                       | 573.68                  | 573.89        |
|                    | Lias        | Staffellegg Formation | <b>612.46</b>           | <b>612.76</b> |
| Triassic           | Keuper      | Klettgau Formation    |                         |               |
|                    |             | Bänkerjoch Formation  | 653.45                  | 654.70        |
|                    |             | Schinznach Formation  | 748.27                  | 749.52        |
|                    | Muschelkalk |                       | 820.32                  | 821.09        |
|                    |             | Zeglingen Formation   | 829.11                  | 829.88        |
|                    |             |                       | final depth             |               |

<sup>5</sup> For details regarding lithostratigraphic boundaries see Dossier III and IV; for details about depth shifts (core goniometry) see Dossier V.

### 1.3 Documentation structure for the BOZ2-1 borehole

NAB 21-22 documents the majority of the investigations carried out in the BOZ2-1 borehole, including laboratory investigations on core material. The NAB comprises a series of stand-alone dossiers addressing individual topics and a final dossier with a summary composite plot (Tab. 1-3).

This documentation aims at early publication of the data collected in the BOZ2-1 borehole. It includes most of the data available approximately one year after completion of the borehole. Some analyses are still ongoing (e.g. diffusion experiments, analysis of veins, hydrochemical interpretation of water samples) and results will be published in separate reports.

The current borehole report will provide an important basis for the integration of datasets from different boreholes. The integration and interpretation of the results in the wider geological context will be documented later in separate geoscientific reports.

Tab. 1-3: List of dossiers included in NAB 21-22

Black indicates the dossier at hand.

| Dossier | Title                                                                                    | Authors                                                                                                                                             |
|---------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| I       | TBO Bözberg-2-1: Drilling                                                                | P. Hinterholzer-Reisegger                                                                                                                           |
| II      | TBO Bözberg-2-1: Core Photography                                                        | D. Kaehr & M. Gysi                                                                                                                                  |
| III     | TBO Bözberg-2-1: Lithostratigraphy                                                       | P. Jordan, P. Schürch, H. Naef, M. Schwarz, R. Felber, T. Ibele & M. Gysi                                                                           |
| IV      | TBO Bözberg-2-1: Microfacies, Bio- and Chemostratigraphic Analyses                       | S. Wohlgwend, H.R. Bläsi, S. Feist-Burkhardt, B. Hostettler, U. Menkveld-Gfeller, V. Dietze & G. Deplazes                                           |
| V       | TBO Bözberg-2-1: Structural Geology                                                      | A. Ebert, L. Gregorczyk, S. Cioldi, E. Hägerstedt & M. Gysi                                                                                         |
| VI      | TBO Bözberg-2-1: Wireline Logging, Micro-hydraulic Fracturing and Pressure-meter Testing | J. Gonus, E. Bailey, J. Desroches & R. Garrard                                                                                                      |
| VII     | TBO Bözberg-2-1: Hydraulic Packer Testing                                                | R. Schwarz, M. Willmann, S. Reinhardt, S.M.L. Hardie, M. Voß & A. Pechstein                                                                         |
| VIII    | TBO Bözberg-2-1: Rock Properties, Porewater Characterisation and Natural Tracer Profiles | T. Gimmi, L. Aschwanden, L. Camesi, E. Gaucher, A. Jenni, M. Kiczka, U. Mäder, M. Mazurek, D. Rufer, H. N. Waber, P. Wersin, C. Zwahlen & D. Traber |
| IX      | TBO Bözberg-2-1: Rock-mechanical and Geomechanical Laboratory Testing                    | E. Crisci, L. Laloui & S. Giger                                                                                                                     |
| X       | TBO Bözberg-2-1: Petrophysical Log Analysis                                              | S. Marnat & J.K. Becker                                                                                                                             |
|         | TBO Bözberg-2-1: Summary Plot                                                            | Nagra                                                                                                                                               |

## 1.4 Scope and objectives of this dossier

The dossier at hand describes the results of the stochastic petrophysical log analysis performed in the BOZ2-1 borehole. The detailed workflow for this analysis is described in a methodology report (Marnat & Becker 2021, NAB 20-30). Here, only a very short summary is given. The lowest vertical resolution tools, such as ECS, Gamma Ray or Sonic, are limiting the resolution of the MultiMin analysis. High resolution and standard tools cannot be mixed in the same processing. For this reason, only the standard resolution version of the logs was used as input with a sampling rate of ½ foot (~ 15 cm).

For the Multimineral Log Analysis (abbreviation MultiMin throughout this report), a mineral content is assumed at each of these measurement locations, either from prior knowledge or from mineralogical lab analyses. A theoretical log response from this assumed mineral content for each available petrophysical log is calculated and compared to the measured log. Using optimisation techniques, the difference (i.e. the error) between calculated log responses and measured petrophysical logs is minimised by adjusting the assumed mineral content. Any deviation from this workflow is explained in this report.

The result of these analyses therefore are continuous profiles of the mineralogical content and other rock parameters (e.g. porosity) where the main aim of these calculations here were continuous profiles of the clay content and porosity.

The organisation of this dossier follows the necessary steps of the workflow. First, data is collected, and quality checks (QC) are performed. In addition, necessary pre-calculations concerning important environmental parameters are performed (Chapter 2). This is followed by the actual analysis of the data (Chapter 3) and a short description of results in Chapter 4. Chapter 4 also includes an estimation of the fit of the results to available data from lab measurements.

All depths in this report are reported as measured depths from top rig cellar (MD) if not stated otherwise.





## 2 Data preparation

### 2.1 Used log data

The acquisition, QC (quality control) and generation of log composites of the petrophysical logs from the borehole BOZ2-1 is described in more detail in Dossier VI, the raw corrected log data is also shown in Plate 1. Note that abbreviations in brackets in the list below are according to Schlumberger (SLB) mnemonics (as SLB was the log contractor responsible for the log acquisition). A detailed description of how the different tools measure the respective parameters and the underlying physics behind these measurements is not the focus of this report and can be found in Dossier VI, Chapter 3.1. The petrophysical logs used for this study are listed below:

- **Caliper log** (EMS/PPC – Environmental Measurement Sonde/Powered Positioning Caliper). The caliper log uses several coupled pairs of mechanical arms (2 pairs with PPC, 3 pairs with EMS) to continuously measure the borehole shape in different orientations.
- **Gamma Ray** (GR, from the EDTC – Enhanced Digital Telemetry Cartridge). This log measures the naturally occurring radioactivity which can be used to determine the mineral content (mainly clay).
- **Spectral Gamma Ray** (SGR, from the HNGS – Hostile Natural Gamma Ray Sonde). This tool also measures the naturally occurring radioactivity. In addition to the total radioactivity, the tool is able to determine the amount (in ppm or wt.-%) of uranium (U), thorium (Th) and potassium (K) in the rocks which can be used e.g. for clay typing.
- **Neutron Hydrogen Index** (APLC curve, from APS – Accelerator Porosity Sonde). The APS is a tool that can measure the neutron hydrogen index in water saturated formations.

This measurement is corrected for environmental effect and normalized to limestone matrix. SLB refers to this corrected curve as APLC (Near/Array Corrected Limestone Porosity). In addition, the APS can be used to determine **Sigma** (SIGF), a measure to determine the water content and mineralogical characterisations.

- **Density** (TLD – Three-detector Lithology Density). TLD is an induced radiation tool that measures the bulk density of the formation and the photoelectric factor (PEF). It uses a radioactive source to emit gamma photons into the formation. The gamma rays undergo Compton scattering by interacting with the atomic electrons in the formation. Compton scattering reduces the energy of the gamma rays in a stepwise manner and scatters the gamma rays in all directions. When the energy of the gamma rays is less than 0.5 MeV, they can undergo photoelectric absorption by interacting with the electrons. The flux of gamma rays that reaches each of the detectors of the TLD is therefore attenuated by the formation, and the amount of attenuation is dependent upon the electronic density of the formation, which is related to its bulk density. In addition, the TLD provides the **photoelectric absorption index** (photoelectric factor – PEF), which represents the probability that a gamma photon will be photo-electrically absorbed per electron of the atoms that compose the material. The PEF characterises the mineralogy. The TLD tool is housed in the High-Resolution Mechanical Sonde that also includes the Micro-Cylindrically Focused Log (MCFL) sonde, that measures the micro-resistivity or alternatively, the resistivity very close to the borehole wall (RXOZ).
- **Element Spectroscopy** (ECS – Elemental Capture Spectroscopy). The ECS is also an induced radiation tool with a radioactive neutron source. The ECS measures the concentration of a series of elements in the formation by analyzing the spectrum of back scattered gamma rays. The following elements are used in this report: DWSI\_WALK2 (Si), DWCA\_WALK2 (Ca), DWFE\_WALK2 (Fe), DWSU\_WALK2 (S), DWTI\_WALK2 (Ti). Special processing techniques allow under certain circumstances the measurement of supplementary elements

such as Mg (MGWALK closure model, DWMG\_MGWALK curve); Al, K and Na (ALKNA closure model, with ALKNA suffix). The element spectroscopy measurements are provided in weight concentration.

During the QC process of the ECS acquisition, the DWMG\_MGWALK response could be validated in the pure dolomites, reading close to the theoretical endpoint for dolomites: 0.132 W/W.

The iron concentration from the ECS WALK2 model was found systematically overestimating the XRF measurements on core samples. A correction was performed founded on the ECS and XRF results in MAR1-1 (see Section 2.3). The resulting iron concentration curve was called DWFE\_CORR.

- **Resistivity** (HRLT – High Resolution Laterolog array Tool). The HRLT measures the formation electrical resistivities at different depths of investigation, providing a mud filtrate invasion profile, if any invasion. Processing allows the extrapolation of the resistivity measurements far into the formation (true formation resistivity), as well as close to the borehole wall (micro-resistivity). The resistivity is a function of the water content of the formation and its salinity.
- **Sonic** (MSIP – Modular Sonic Imaging Platform). The MSIP measures the formation interval transit time, a measure of how fast seismic waves (compressional, shear and Stoneley waves) propagate through the formation.

An overview of the used petrophysical logs and their measurements in the BOZ2-1 borehole is given in Plate 1.

Usable log data were available for analysis from 102.8 to 713.0 m (see Plate 1). Due to gaps between drilling sections and cased hole sections (see Dossier I), two minor MultiMin interpretation gaps, due to insufficient petrophysical logs coverage, remained in the following intervals, as shown in Fig. 2-1:

- 367.9 – 370.1 m (between sections I and II)
- 613.4 – 614.4 m (between sections II and III)

In the upper interval (0 – 102.8 m drillers depth), only technical logging was performed which is not suitable for the log interpretation routines used here. The wireline logging in Chapter 3, below 615 m, was not sufficient for a detailed MultiMin analysis (no APS-TLD-ECS); the Multi Sensor Core Logger (MSCL) data were included in the input data.

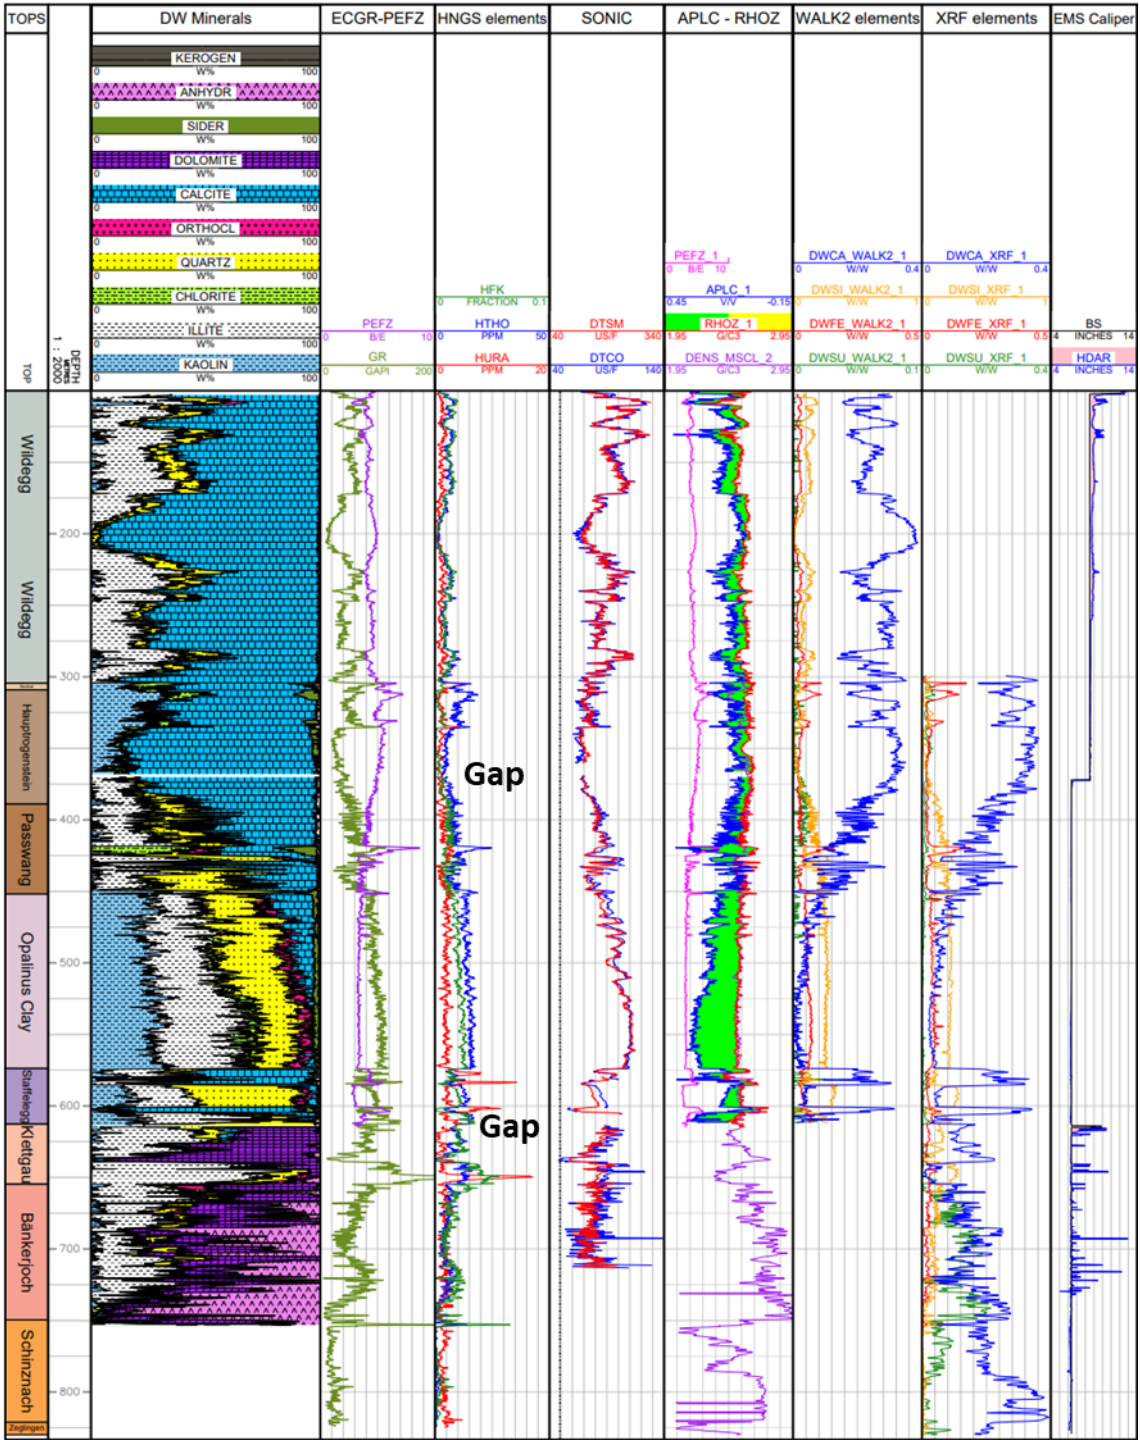


Fig. 2-1: Petrophysical log availability and gaps in the BOZ2-1 borehole

Please note that ECS elements are displayed as measured (in weight/weight, 0 – 1 w/w range) and are not converted to wt.-% (weight percentage) here.

## 2.2 Used core data

As previously mentioned, the MultiMin algorithm requires an initial assumption of the mineralogical content. For the calibration of the log interpretation, core data (lab measurements of mineralogy, total porosity and density) were used (see Dossier VIII for more details on core data, some core data is shown in the Appendix in Plates 1 and 2). 62 core samples collected at depth ranging from 263.28 to 659.95 m were available, all were also analysed for total porosity (pycnometer, water-loss total porosity), 56 for XRD mineralogy and 7 for clay types. The analysed minerals were quartz, K-feldspars, plagioclase, calcite, dolomite/ankerite, siderite, magnesite, anhydrite, celestite, pyrite, clay minerals and organic carbon. The 7 samples analysed for clay typing (in the interval 443.71 – 597.83 m) quantified the illite, smectite, kaolinite and chlorite endmembers. The mineral content was used to calibrate the MultiMin interpretation.

As mentioned earlier, porosities and grain densities are also included in the core data and hence used for this study. The three measured porosities (water-loss porosity (105 °C) using bulk wet density, water-loss porosity (105 °C) using grain density and pycnometer porosity) were accounted for, the most relevant was selected compared to the MultiMin total porosity (PHIT  $\Phi_t$ ). The relative errors of these measurements are provided as well. For more details on the exact measurement procedures of these parameters see Waber (2020).

The difference between core and log depth has been reported in Dossier V. The shift ranges from 0.17 to 0.55 m in sections I and II, and is up to 1.35 m in section III. This shift was applied to the core data for an appropriate calibration.

Part of the core data is also shown in Plate 2.

## 2.3 Multi-sensor Core Logger (MSCL) data

MSCL measurements from cores were available for parts of the BOZ2-1 borehole (from 298.13 to 829.09 m). The following parameters were measured:

- Bulk density in g/cc
- Compressional (P) wave velocity in m/s
- Spectral gamma ray curves: potassium (K, %), thorium (Th, ppm) and uranium (U, ppm)
- XRF (X-ray fluorescence) elemental analysis: iron (Fe), silicon (Si), calcium (Ca), aluminium (Al), titanium (Ti) and sulphur (S) are used for this study.

Some ECS data could not be acquired between drilling sections, leaving a gap. In this same interval, no XRF data is available to fill the gaps.

The XRF elemental analysis results were compared with the same elements concentration from the ECS logging (WALK2 closure model). The MSCL data (also referred to as core logs in this report) covers the measured interval at variable sampling rates (usually 0.05 m). This comparison is shown in Fig. 2.2 for BOZ2-1.

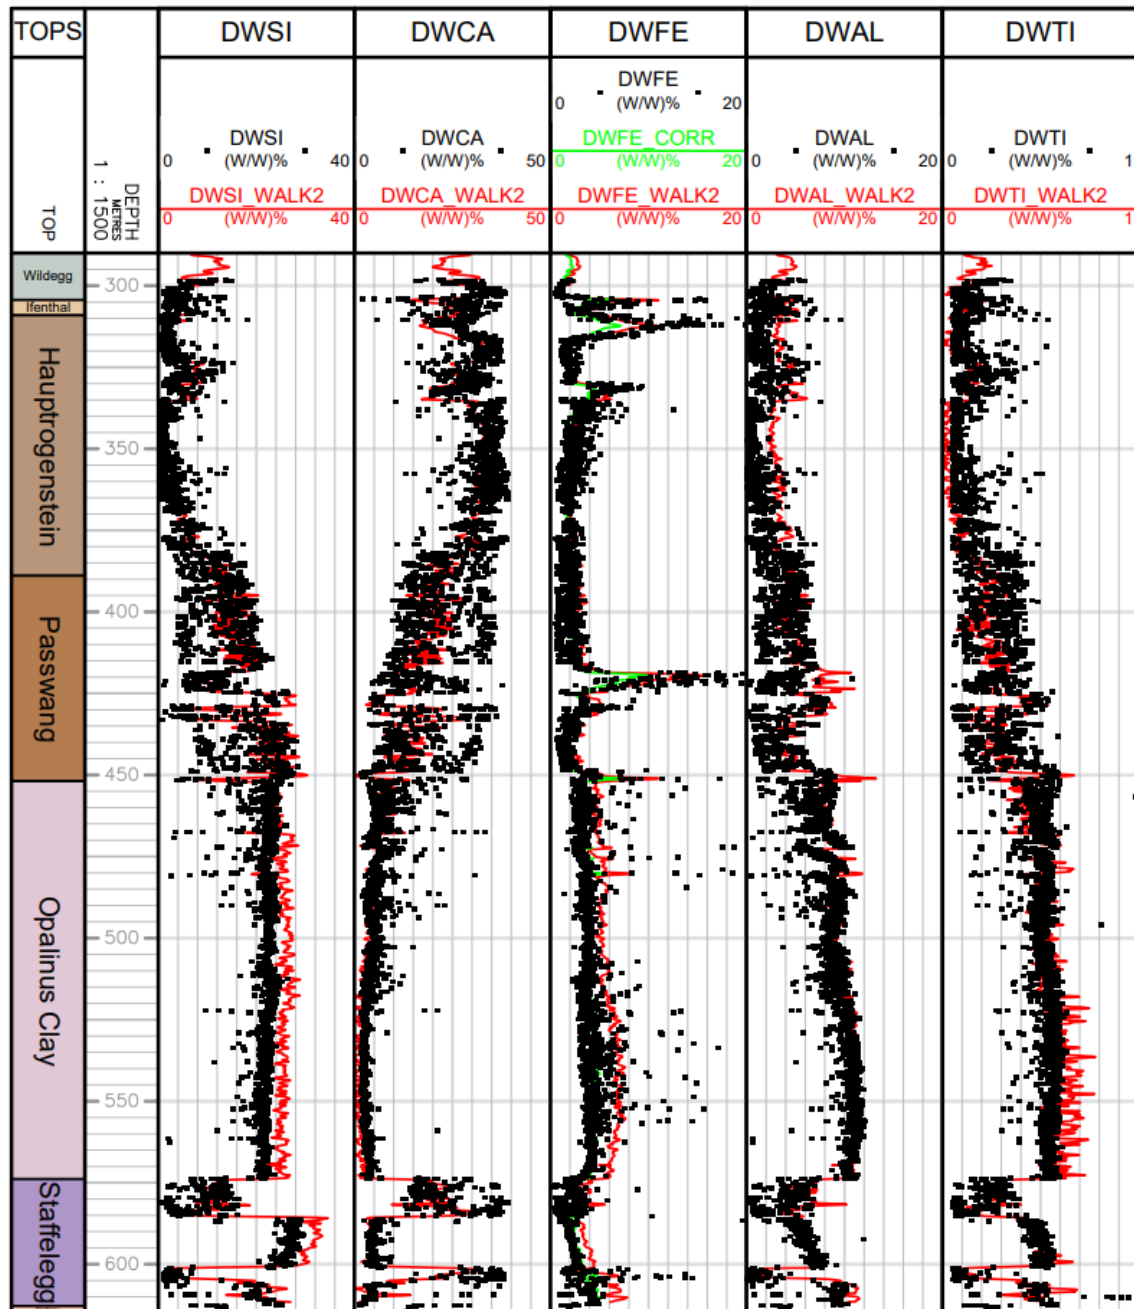


Fig. 2-2: XRF (black dots) and ECS WALK2 (red curves) elements comparison

While the calcium, aluminium and titanium concentrations are almost similar, the XRF iron and silicon are lower than ECS WALK2 closure model. The silicon content was not corrected, the minerals endpoints were adjusted accordingly.

The same bias on the iron content was already noticed in the recent MAR1-1 borehole, a correction was used based on the correlation between XRF iron and ECS DWFE\_WALK2, using the following equation:

$$\text{DWFE\_CORR} = 0.0375 + 0.396 \cdot \text{DWFE\_WALK2} + 4.882 \cdot \text{DWFE\_WALK2}^2$$

The DWFE\_CORR curve was also plotted in Fig. 2-2 (green curve in the iron track), it is close to the XRF iron measurements in BOZ2-1. It was preferred to use the same amount of correction already performed in the recent boreholes.

The same check was done for the core and HNGS spectral gamma ray (see Fig. 2-3) in BOZ2-1.

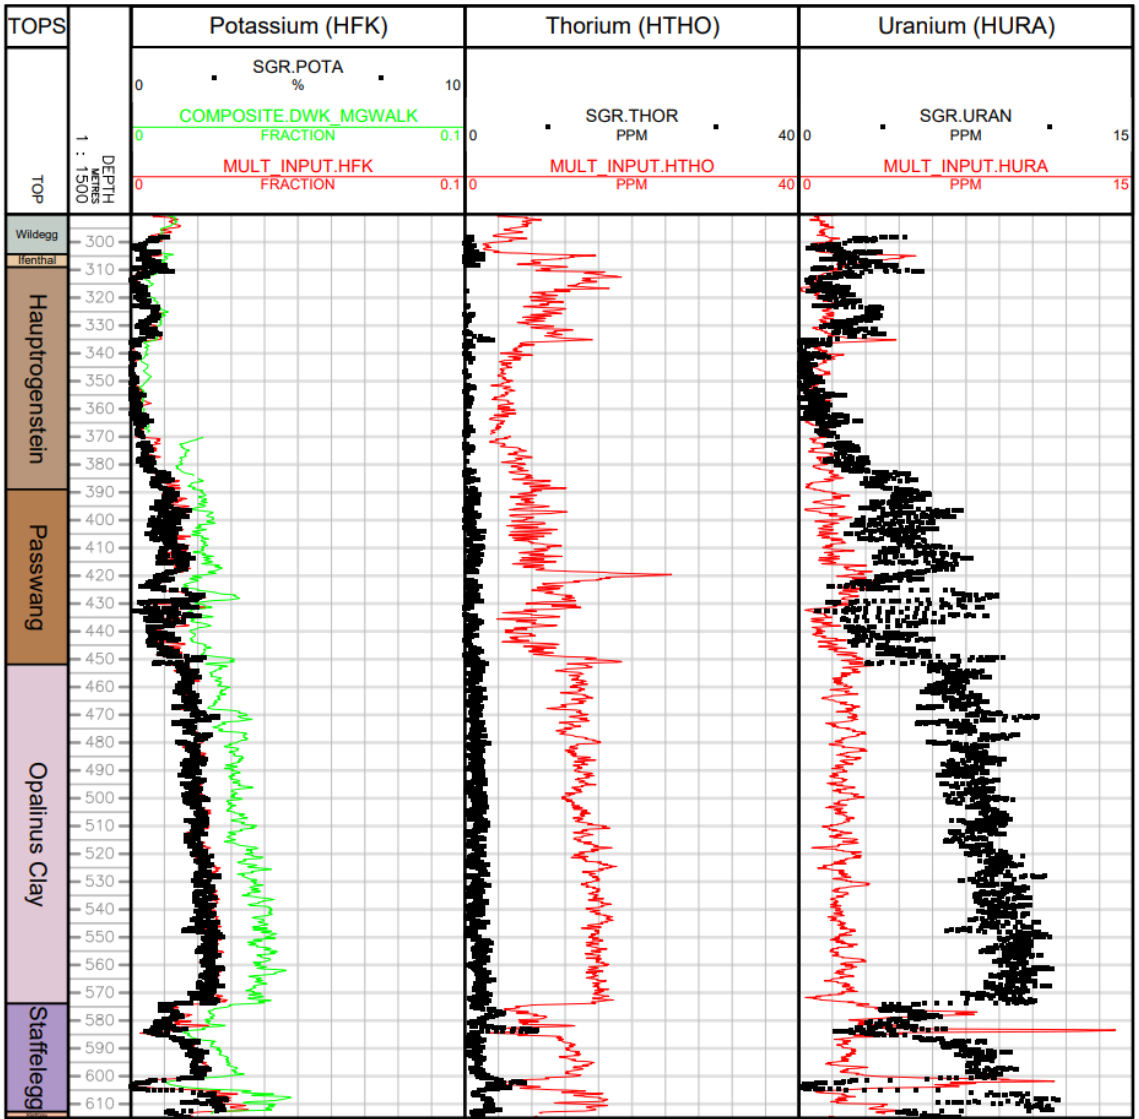


Fig. 2-3: Core (black dots: spectral gamma ray) and wireline HNGS (red curves) spectral gamma ray elements comparison

The potassium from MSCL is almost similar to HFK from HNGS (Fig. 2-3). Both MSCL uranium and thorium are inconsistent with HNGS curves. The potassium track shows in addition the DWK\_MGWALK (green curve), potassium content from the ECS tool. It is well correlated to HFK but requires a correction to replace HFK where missing, usually at sections bottom. The HTHO from HNGS is often much higher than the thorium content measured with the MSCL. Hence, the MSCL data was used indirectly for a QC and subsequently to correct petrophysical log measurements, namely the iron content of the ECS measurements.

The MSCL logs (Bulk density, XRF elements) were used in the Keuper to replace the missing wireline logs (TLD, ECS).

## **2.4 MultiMin input dataset preparation**

The petrophysical composite log used as input for this study (see Dossier VI) represents a quality controlled, edited, corrected and merged dataset for a selection of the most important petrophysical logging data recorded in each section of the borehole. As mentioned earlier, two gaps in the coverage of the borehole with petrophysical logs occur. The original measurements and corrections of the petrophysical logs are reported in Dossier VI.

The ECS corrected iron content (DWFE\_CORR) was used instead of DWFE\_WALK2.

The wireline logging in section III, below 615 m, was not sufficient for a detailed MultiMin analysis (no APS-TLD-ECS); the MSCL data were included as input data. The MSCL data were upscaled to the wireline logs scale using a convolution product (see Section 3.1).

In the porous dolomites of the Schinznach Formation, the MSCL XRF sulphur concentration is up to 9.6 wt.-%, i.e. not compatible with the lab XRD anhydrite content, up to 6.5 wt.-%, most likely due to erroneous MSCL measurements. Therefore, no MultiMin analysis was performed below 753 m in BOZ2-1.

## **2.5 Preliminary calculations (Precalc)**

As the wireline logs measure parameters under in situ conditions (e.g. temperatures depending on depth and temperature of the borehole fluid, infiltration of mud into the formation depending on the borehole fluid and its density etc.), these prevailing conditions in the borehole have to be taken into account to correctly predict/calculate the theoretical log response from the assumed mineral and fluid content (i.e. total porosity) at a certain depth. Continuous profiles of these environmental parameters were calculated using the Precalc module from the interpretation software Geolog.

The main parameters used for the calculation of these environmental parameters are, for reasons of transparency and to be able to replicate exactly the analyses reported here, displayed in Tab. 2-1 and Appendix A.

The mud properties (mud density and resistivities) reported here were extracted from the validated SLB wireline log headers (see Dossier VI).

Tab. 2-1: Precalc parameters used in BOZ2-1

| Location | Mode   | Comment                             | Unit     | Name        | 100-368 m     | 368-615 m     | 615-829 m     |
|----------|--------|-------------------------------------|----------|-------------|---------------|---------------|---------------|
| Interval | In_Out | Option for formation temperature    | ALPHA*8  | OPT_FT      | SONDE         | SONDE         | SONDE         |
| Interval | In_Out | Option for reference                | ALPHA*8  | OPT_REF     | DEPTH         | DEPTH         | DEPTH         |
| Interval | In_Out | Option for resistivity mudcake calc | ALPHA*8  | OPT_HMC_RES | SRT           | SRT           | SRT           |
| Interval | In_Out | Option for salinity calculation     | ALPHA*16 | OPT_SAL     | BATEMAN_KONEN | BATEMAN_KONEN | BATEMAN_KONEN |
| Interval | In_Out | Option for form'n/hydro pressure    | ALPHA*8  | OPT_FP      | MUD_DENS      | MUD_DENS      | MUD_DENS      |
| Interval | In_Out | Base of drilling mud                | ALPHA*8  | MUDBASE     | WATER         | WATER         | WATER         |
| Interval | In_Out | Drilling fluid density              | LB/G     | DFD         | 8.76          | 10.01         | 8.76          |
| Interval | In_Out | Resistivity of mud sample           | OHMM     | RMS         | 1.23          | 0.16          | 3.14          |
| Interval | In_Out | Mud sample temperature              | DEGC     | MST         | 17.3          | 13.7          | 10.1          |
| Interval | In_Out | Resistivity of filtrate sample      | OHMM     | RMFS        | 1.16          | 0.12          | 2.71          |
| Interval | In_Out | Mud filtrate sample temperature     | DEGC     | MFST        | 17.1          | 14.4          | 9.7           |
| Interval | In_Out | Resistivity of mudcake sample       | OHMM     | RMCS        | 1.31          | 0.24          | 3.36          |
| Interval | In_Out | Mudcake sample temperature          | DEGC     | MCST        | 17.2          | 13.2          | 10.2          |
| Interval | In_Out | Drilling bit size                   | IN       | BS          | 8.5           | 6.375         | 6.375         |
| Interval | Output | Salinity of mud                     | PPM      | SALM        | PHASES.SALM   | PHASES.SALM   | PHASES.SALM   |
| Interval | Output | Salinity of mud filtrate            | PPM      | SALMF       | PHASES.SALMF  | PHASES.SALMF  | PHASES.SALMF  |
| Log      | Input  | Depth                               | METRES   | DEPTH       | DEPTH         | DEPTH         | DEPTH         |
| Log      | Input  | Mud temperature from sonde          | DEGF     | MTEM        | FTEMP         | FTEMP         | FTEMP         |
| Log      | Input  | Caliper from nuclear/porosity       | IN       | CALI_POR    | HDAR          | HDAR          | HDAR          |
| Log      | Input  | Caliper from resistivity/sonic      | IN       | CALI_RES    | HDAR          | HDAR          | HDAR          |
| Log      | Input  | Density log                         | G/C3     | RHO         | RHOZ          | RHOZ          | RHOZ          |
| Log      | Input  | Photo-electric factor               | B/E      | PEF         | PEFZ          | PEFZ          | PEFZ          |
| Log      | Input  | True formation resistivity          | OHMM     | RT          | RT_HRLT       | RT_HRLT       | RT_HRLT       |
| Log      | Input  | Flushed zone resistivity            | OHMM     | R XO        | R XOZ         | R XOZ         | R XOZ         |
| Log      | Output | Formation temperature               | DEGF     | FTEMP       | FTEMP         | FTEMP         | FTEMP         |
| Log      | Output | Formation/hydrostatic pressure      | PSI      | FPRESS      | FPRESS        | FPRESS        | FPRESS        |
| Log      | Output | Mud resistivity                     | OHMM     | RM          | RM            | RM            | RM            |
| Log      | Output | Mud filtrate resistivity            | OHMM     | RMF         | RMF           | RMF           | RMF           |
| Log      | Output | Mudcake resistivity                 | OHMM     | RMC         | RMC           | RMC           | RMC           |
| Log      | Output | Mudcake from nuclear/porosity       | IN       | HMC_POR     | HMC_POR       | HMC_POR       | HMC_POR       |
| Log      | Output | Mudcake from resistivity/sonic      | IN       | HMC_RES     | HMC_RES       | HMC_RES       | HMC_RES       |
| Log      | Output | Photo-electric cross-section        | B/C3     | U           | U             | U             | U             |
| Log      | Output | True formation conductivity         | MH/M     | CT          | CT            | CT            | CT            |
| Log      | Output | Flushed zone conductivity           | MH/M     | CXO         | CXO           | CXO           | CXO           |



### 3 Petrophysical log interpretation

#### 3.1 MultiMin interpretation

In the following, the petrophysical log interpretation and its results are shortly described. All necessary data treatment and environmental pre-calculations have been described in the previous chapters or are described in the Methodology report (Marnat & Becker 2021). Many qualitatively good wireline logs were available down to the lower part of the borehole, allowing the computation of many unknowns (fluids and minerals).

Significant hydrocarbon shows were neither described by the mudlogging nor inferred from cores or petrophysical logs. Consequently, the formations were treated as water wet (i.e. with saline water as the pore fluid).

The main minerals were inferred from the XRD measurements on core samples and regional knowledge (XRD-data from previously drilled boreholes Bülach-1-1 and Trüllikon-1-1, Marthalen-1-1 etc. (see Dossier VIII of the respective borehole reports), Weiach-1 and Benken-1 from Mazurek 2017). Using the MultiMin approach, the mineral content for the following minerals were modelled:

- Clay mineral endmembers (kaolinite, illite, smectite and chlorites) and total clay mineral content. From the available wireline logs, the smectite cannot be differentiated from the kaolinite
- Silicates: quartz, potassic feldspars, plagioclases
- Carbonates: calcite, siderite, dolomite/ankerite, iron oxide, to honour the ECS iron content in the formations just above the Opalinus Clay, as the measured siderite, pyrite and chlorite only cannot explain the DWFE\_CORR values. Note that the problem would be even worse with the raw DWFE\_WALK2 curve.
- Evaporites: anhydrite
- Organic carbon (kerogen)

These compounds were modelled depending on the available data. In case not enough data were available for a given interval (e.g. where data was missing or of insufficient quality), some minerals were merged to a pseudo-mineral to reduce the number of unknowns (see Marnat & Becker 2021 for more details).

Tab. 3-1 shows the interpretation intervals, the available data and the MultiMin model names used in each interval. The intervals are defined based on their consistent mineralogy, available logs and consistent environmental parameters (e.g. mud system changes). Interpretation intervals may be subdivided further, e.g. to respect a reduced data quality. The full table with all intervals is available in Appendix B.

Tab. 3-1: List of MultiMin models used in BOZ2-1

The intervals (column Interval name) may include several MultiMin models if some of the input data were of bad quality or the particular section of the interval required special assumptions due to its assumed mineralogy.

The column Cond Num stands for model condition number. Low values are typical for good mathematical models (below 4.00). Condition numbers above 4.00 highlighted in yellow correspond to fair models. See Section 3.2 for more information.

| From (m) | To (m) | Interval name | Multimin Models          | Cond Num | Description/Comments    |
|----------|--------|---------------|--------------------------|----------|-------------------------|
| 102.8    | 108.0  | INT1_TOP      | boz21_int1_top           | 4.38     | Malm                    |
| 108.0    | 109.8  | INT1_TOP      | boz21_int1_top_no_dts    | 4.36     | Missing DTSM            |
| 109.8    | 304.2  | INT1_TOP      | boz21_int1_top           | 4.38     | Malm                    |
| 304.2    | 359.8  | INT1_TOP      | boz21_int1_top_bd        | 4.61     | Brauner Dogger          |
| 359.8    | 365.9  | INT1_TOP      | boz21_int1_top_bd_no_dt  | 4.61     | Missing Sonic           |
| 365.9    | 367.9  | INT1_TOP      | boz21_int1_top_bd_no_aps | 4.14     | Reduced logs dataset    |
| 367.9    | 370.1  |               | No model                 |          | Not enough logs         |
| 370.1    | 372.5  | INT1_BOT      | boz21_int1_bot_no_ct     | 4.49     | Missing CT              |
| 372.5    | 423.6  | INT1_BOT      | boz21_int1_bot           | 4.49     | Brauner Dogger          |
| 423.6    | 424.1  | INT1_BOT      | boz21_int1_bot_no_ct     | 4.49     | Missing CT              |
| 424.1    | 432.0  | INT1_BOT      | boz21_int1_bot           | 4.49     | Brauner Dogger          |
| 432.0    | 432.4  | INT1_BOT      | boz21_int1_bot_no_ct     | 4.49     | Missing CT              |
| 432.4    | 435.2  | INT1_BOT      | boz21_int1_bot           | 4.49     | Brauner Dogger          |
| 435.2    | 435.6  | INT1_BOT      | boz21_int1_bot_no_ct     | 4.49     | Missing CT              |
| 435.6    | 438.0  | INT1_BOT      | boz21_int1_bot           | 4.49     | Brauner Dogger          |
| 438.0    | 438.3  | INT1_BOT      | boz21_int1_bot_no_ct     | 4.49     | Missing CT              |
| 438.3    | 449.0  | INT1_BOT      | boz21_int1_bot           | 4.49     | Brauner Dogger          |
| 449.0    | 579.4  | INT2          | boz21_int2               | 3.54     | Opalinus and Staffelegg |
| 579.4    | 580.0  | INT2          | boz21_int2_no_dt         | 3.54     | Missing DTSM            |
| 580.0    | 581.7  | INT2          | boz21_int2               | 3.54     | Opalinus and Staffelegg |
| 581.7    | 582.0  | INT2          | boz21_int2_no_dt         | 3.54     | Missing DTSM            |
| 582.0    | 585.4  | INT2          | boz21_int2               | 3.54     | Opalinus and Staffelegg |
| 585.4    | 601.0  | INT3          | boz21_int3               | 4.12     | Staffelegg              |
| 601.0    | 601.4  | INT3          | boz21_int3_no_dt         | 3.58     | Missing DTSM            |
| 601.4    | 603.9  | INT3          | boz21_int3               | 4.12     | Staffelegg              |
| 603.9    | 605.1  | INT3          | boz21_int3_no_dt         | 3.58     | Missing DTSM            |
| 605.1    | 605.6  | INT3          | boz21_int3               | 4.12     | Staffelegg              |
| 605.6    | 611.5  | INT3          | boz21_int3_no_dt         | 3.58     | Missing Sonic           |
| 611.5    | 613.4  | INT3          | boz21_int3_sta_base      | 2.53     | Staffelegg              |
| 613.4    | 614.4  |               | No model                 |          | Not enough logs         |

Tab. 3-1: (continued)

| From (m) | To (m) | Interval name | Multimin Models       | Cond Num | Description/Comments |
|----------|--------|---------------|-----------------------|----------|----------------------|
| 614.4    | 614.9  | INT3          | boz21_int3_sta_base   | 2.53     | Staffelegg           |
| 614.9    | 618.1  | INT4_Top      | boz21_int4_xrf        | 3.28     | Using MSCL core data |
| 618.1    | 618.9  | INT4_Top      | boz21_int4_xrf_nodens | 2.67     | Using MSCL core data |
| 618.9    | 645.0  | INT4_Top      | boz21_int4_xrf        | 3.28     | Using MSCL core data |
| 645.0    | 646.1  | INT4_Top      | boz21_int4_xr_nodt    | 3.33     | Using MSCL core data |
| 646.1    | 671.0  | INT4_Top      | boz21_int4_xrf        | 3.28     | Using MSCL core data |
| 671.0    | 672.0  | INT4_Top      | boz21_int4_xr_nodt    | 3.33     | Using MSCL core data |
| 672.0    | 691.8  | INT4_Top      | boz21_int4_xrf        | 3.28     | Using MSCL core data |
| 691.8    | 693.1  | INT4_Top      | boz21_int4_xr_nodt    | 3.33     | Using MSCL core data |
| 693.1    | 711.4  | INT4_Top      | boz21_int4_xrf        | 3.28     | Using MSCL core data |
| 711.4    | 711.8  | INT4_Top      | boz21_int4_xr_nodt    | 3.33     | Using MSCL core data |
| 711.8    | 713.0  | INT4_Top      | boz21_int4_xrf        | 3.28     | Using MSCL core data |
| 713.0    | 721.3  | INT4_Bot      | boz21_int4_bot        | 3.49     | Using MSCL core data |
| 721.3    | 722.5  | INT4_Bot      | boz21_int4_nomg       | 3.82     | Using MSCL core data |
| 722.5    | 753.0  | INT4_Bot      | boz21_int4_bot        | 3.49     | Using MSCL core data |
| 753.0    | 830.0  |               | No model              |          | Not enough logs      |

Given the complexity of the MultiMin models applied to the BOZ2-1 wireline logging data, an inverse linear modelling of the MultiMin endpoints could not be attempted in BOZ2-1. Therefore, mineral and fluid endpoints were manually optimised to both reduce the difference between measured and predicted logs and match the core mineralogy and porosity. Greatly simplified, an endpoint can be regarded as a factor that is used to calculate the theoretical log response for each mineral (e.g. if it is assumed that the endpoint for the density of calcite is 2.71 g/cc, a mineral content of 100 % calcite should result in a density of 2.71 g/cc of the predicted density log. For a detailed explanation see Marnat & Becker (2021).

Based on expert judgement, an uncertainty value for the petrophysical logs was estimated and used to adjust the weight given to the respective log in the MultiMin computation. Again, greatly simplified, if the uncertainty values are large, the corresponding log response will be predicted in the MultiMin interpretation, but it will not be used in the process of error minimisation and hence has no impact on the result of the MultiMin interpretation (for more details see Marnat & Becker 2021). High uncertainty values often apply to the Sonic curves, the PEFZ (as PEFZ is already used for the U computation, Photo-electric cross-section) and the electrical conductivities.

The detailed parameters for all the MultiMin models are available in tables in Appendix C.

Below 614.9 m, only a limited wireline log suite could be acquired (HNGS, HRLT and MSIP down to 713.0 m), limiting the ability to run a comprehensive MultiMin analysis. It was therefore decided to add the MSCL data measured on cores, i.e. the XRF elements and the bulk density, to the wireline dataset.

The MSCL data are discrete data acquired at a very short sampling rate, usually five centimetres.

The following curves were used:

Bulk density (Dens, g/cc)

- XRF elements in mass content: silicium, calcium, magnesium, iron, aluminium, sulphur, titanium, potassium
- Spectral gamma ray elements: potassium and thorium

The MSCL data were rescaled to the wireline log scale, i.e. a continuous logging with a longer vertical resolution.

The following steps were followed to generate the MSCL log dataset:

1. Depth shift of the MSCL dataset using the Core to FMI depth shift table
2. Interpolation of the MSCL data to a continuous log set with a regular sampling rate of five centimetres.
3. Use of the «Fill-Missing» tool in Geolog which linearly interpolates between the small gaps. The maximum fill parameter was set to ten samples.
4. Applying a convolution to all the curves with the following triangular operator:  
0 1 2 3 4 5 4 3 2 1 0
5. The remaining gaps were manually filled where high resolution data showed a clear continuity. Otherwise, they were kept unchanged.
6. The XRF elements were used directly as an input in the MultiMin models, the curves were not calibrated to the ECS elements.
7. The spectral gamma ray curves consistency with their equivalent HNGS logs was checked where both datasets were available (see here after)

The following correction was applied to the MSCL potassium (Fig. 3-1):

$$\text{HFK (\%)} = 1.06043 * \text{MSCL potassium}$$

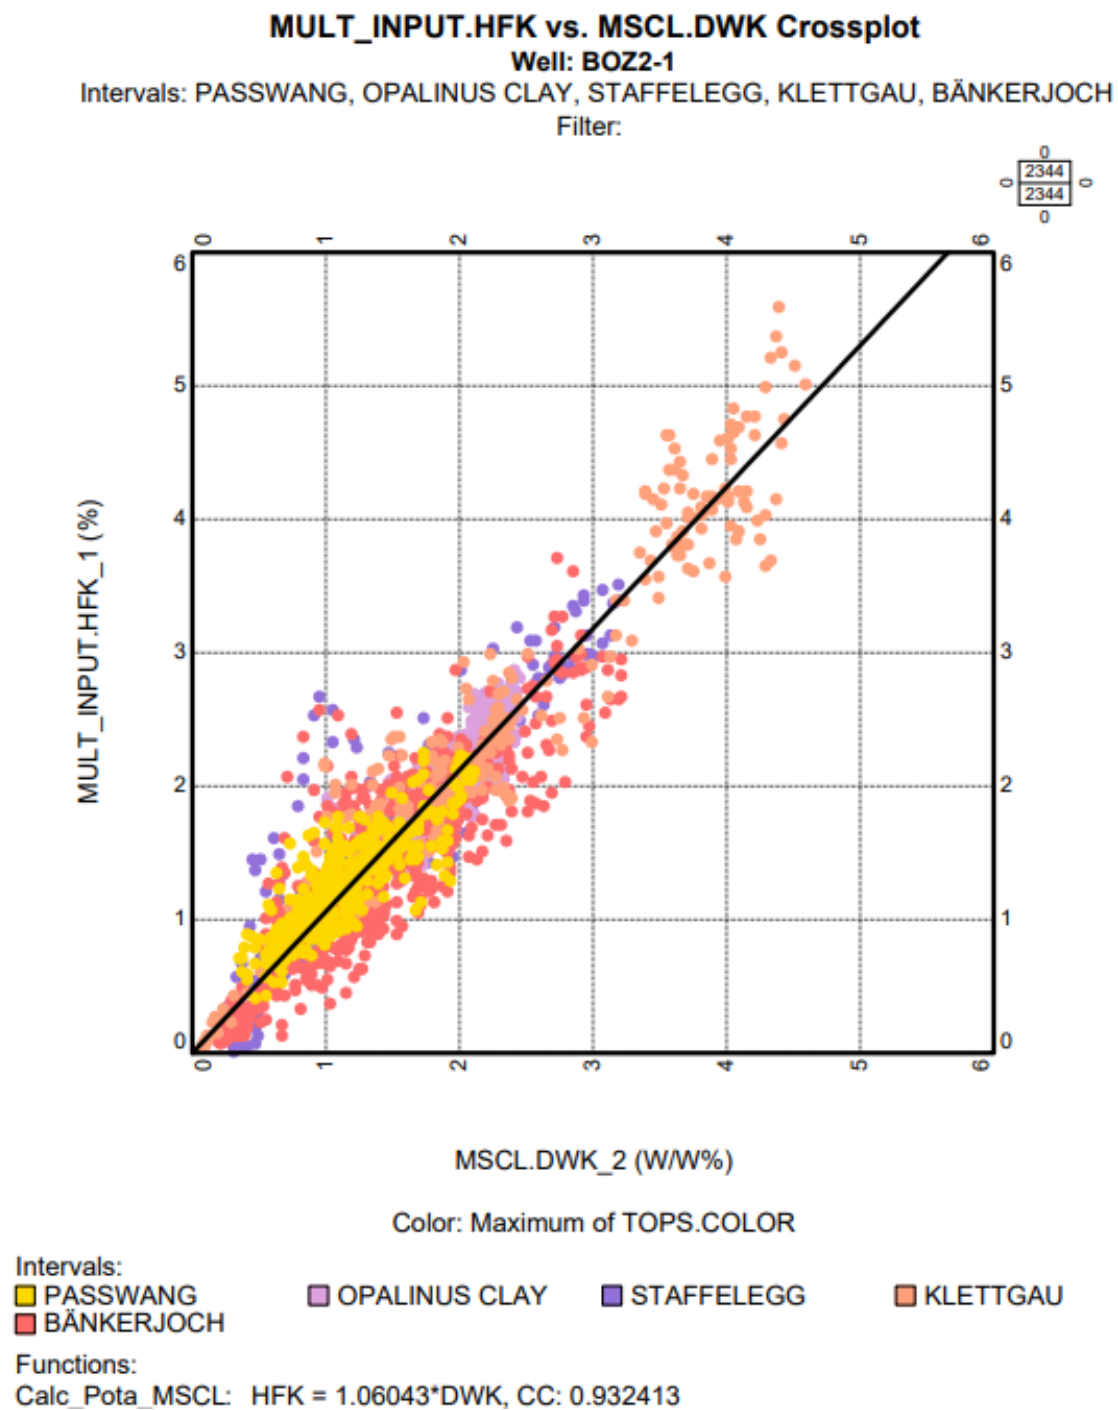


Fig. 3-1: HNGS potassium (HFK) versus MSCL potassium in BOZ2-1

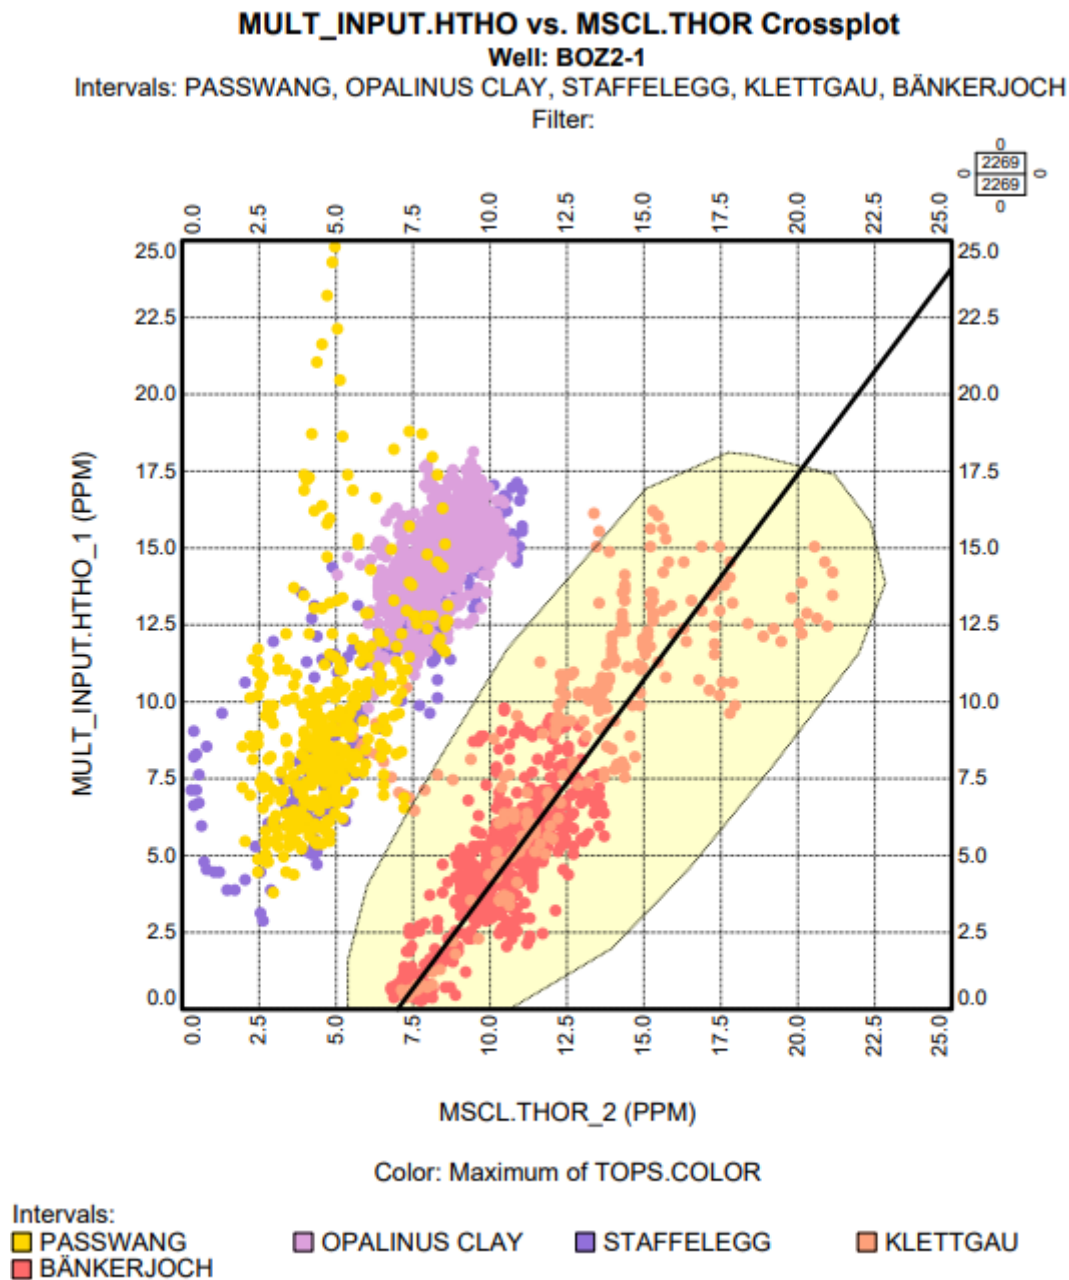


Fig. 3-2: HNGS thorium (HTHO) versus MSCL thorium in BOZ2-1

Two trends are visible in Fig. 3-2, one for the Dogger and Lias, and one for the Triassic. The latter was selected by the yellow polygon and used for the thorium content calibration in the Triassic (as for Lias and Dogger sufficient coverage of wireline logs was available):

$$\text{HTHO (ppm)} = 1.33876 * \text{MSCL Thorium} - 9.37129$$

The MSCL bulk density calibration to the TLD RHOZ curve was also checked (Fig. 3-3).

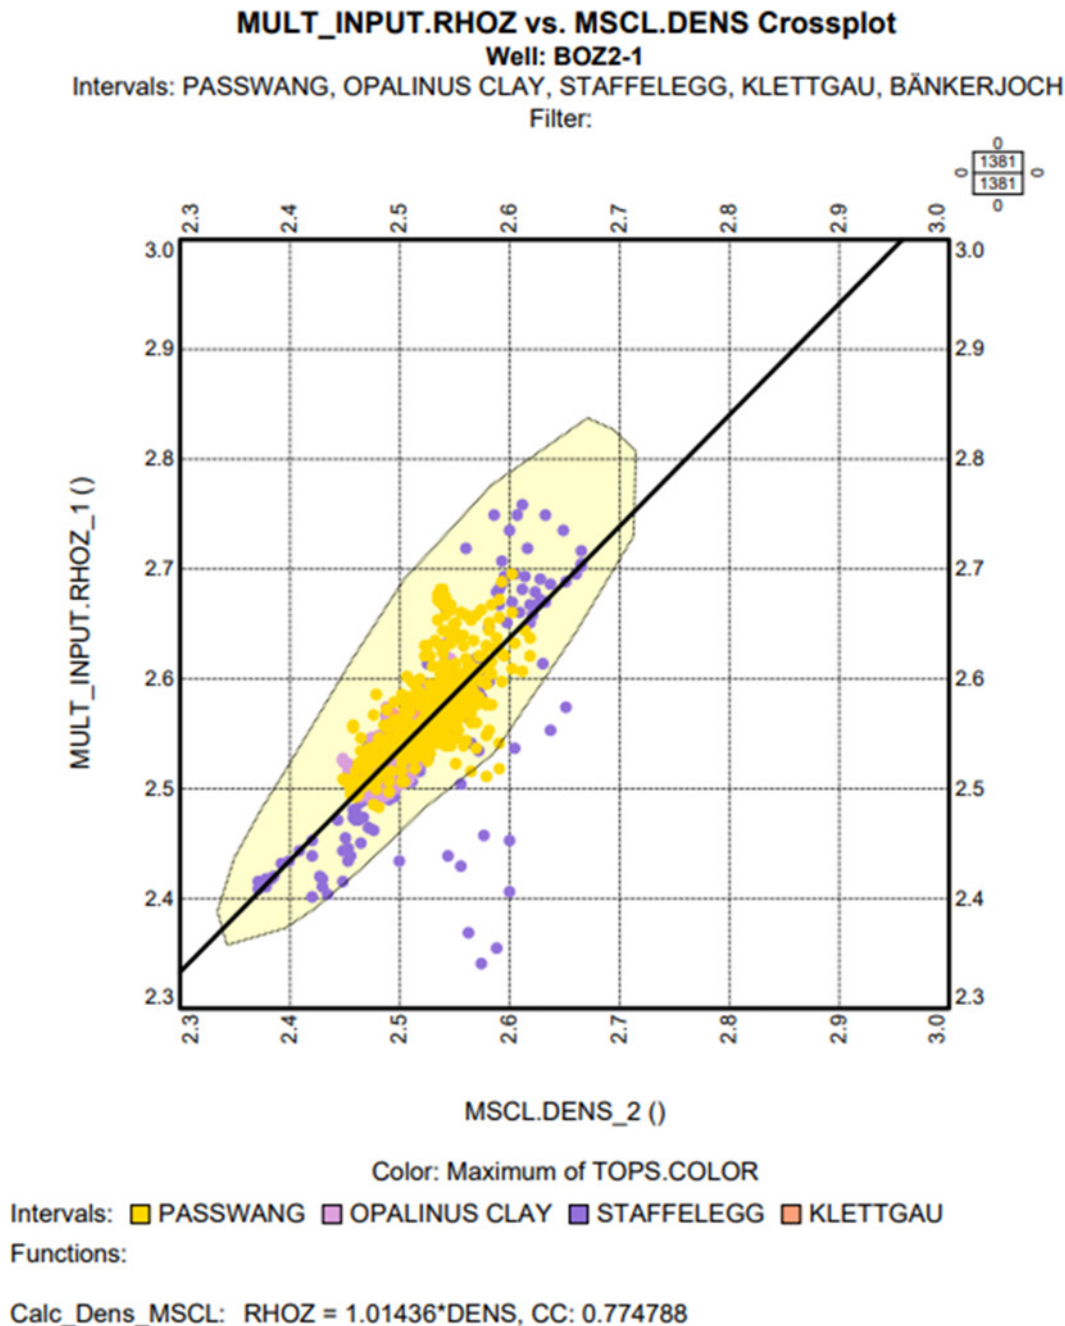


Fig. 3-3: TLD bulk density (RHOZ) versus MSCL bulk density in BOZ2-1

The following correction was applied to the MSCL density, determined using a linear regression in points selected by the yellow polygon, hence excluding a few outliers.:

$$RHOZ \text{ (g/cc)} = 1.01436 * \text{MSCL bulk density}$$

Although this correlation is acceptable, the resulting bulk density in front of the Schinznach Formation is down to dubiously low values in mostly dolomitic rocks, close to 2.05 g/cc.

### 3.2 Bad hole treatment and quality of results

The quality of the MultiMin interpretation relies in part on the quality of the input data. However, it also relies on the number of available curves and the number of unknowns (i.e. minerals) that need to be calculated. Hence, several quality indicators exist that either are informative about the quality of the input data (LQC-Index), the definition of the mathematical model (CONDNUM, NFUN) or the quality of the interpretation results (MULT\_QC and QUALITY).

#### 3.2.1 Indicator for input data quality (LQC\_INDEX)

During each wireline logging, the borehole shape is determined using a caliper log. If the borehole shape deteriorates far from the bit size (BS) and bit shape (usually circular), some (or all) of the wireline logs may measure biased data, because the distance between the log and the borehole wall is too large. In that case, the response of a considerable amount of borehole fluid is measured by the tool and the measurements represent more the petrophysical parameters of the borehole fluid than of the formation.

Four bad hole indicators, which can be used as a quality measure of the data, are calculated from some of the available wireline logs:

1. FLAG\_UNFIT\_ND: Neutron-Density crossplot, flagging bad hole and unusual mineralogical settings from expert picking in the density-neutron crossplot
2. FLAG\_BADHOLE\_OVERGAUGE:  $HDAR > 1.15 * \text{Bit Size}$
3. FLAG\_BADHOLE\_RUGO: Borehole wall rugosity,  $HDRA > 0.025 \text{ g/cc}$ : HDRA (bulk density correction) is a correction of the bulk density measured with a gamma-gamma type logging device (here TLD). If this correction factor is larger than 0.025 g/cc, the indicator is triggered
4. FLAG\_BADHOLE\_STOF:  $APS \text{ Neutron standoff} > 0.35 \text{ in}$

For detailed information about these four indicators, please refer to Dossier VI.

These four indicators have two possible values: 0 in good hole or 1 in bad hole. They were combined to generate a log quality control flag (LQC\_INDEX) using the following equation:

$$\text{LQC\_INDEX} = (\text{FLAG\_BADHOLE\_DN} + \text{FLAG\_BADHOLE\_OVERGAUGE} + \text{FLAG\_BADHOLE\_RUGO} + \text{FLAG\_BADHOLE\_STOF}) / 4$$

Hence, the value of the LQC-Index must be between 0 and 1 (and can only have values of 0, 0.25, 0.5, 0.75 or 1).



### 3.2.2 Indicator for the mathematical model (CONDNUM and NFUN)

#### CONDNUM

The CONDNUM stands for model condition number. Low values are typical for good mathematical models (below 4.00). Condition numbers above 4.00 correspond to fair models. A list of CONDNUMs for the different MultiMin interpretation intervals is given in Tab. 3-1. Please note that CONDNUM is not a proxy for the quality of the calculated output but only for the definition of the mathematical model to calculate the said output.

#### NFUN

NFUN indicates how many iterations were required to fulfil the constraints imposed by the available data where fewer numbers of iterations are indicative for a more robust model. NFUN is also shown in Plate 1. Please note that NFUN, as CONDNUM, is not a proxy for the quality of the calculated output but only for the definition of the mathematical model to calculate the said output.

### 3.2.3 Indicator for the MultiMin interpretation results (MULT\_QC and QUALITY)

#### MULT\_QC

The MultiMin results were not edited in BOZ2-1 (e.g. less reliable data were not removed from the interpretation results), but an integrative MultiMin QC flag was generated (MULT\_QC) combining several of the aforementioned quality indicators to inform the data user of potentially invalid results. As this flag relies on the availability of lab measurements, it is only available where a respective lab measurement is available. The MULT\_QC flag relies on expert judgement and can have values of 2, 1 or 0 based on the three different scenarios detailed below:

- Highly suspicious porosity spikes occur and usually are correlated to an LQC-Index above or equal to 0.5, the quality curve (displayed in Plates 1 and 2, see below) can show values above 2 and the MultiMin results do not match the core measurements: MULT\_QC = 2. A value of 2 in MULT\_QC corresponds to most likely unreliable data.
- Suspicious porosity spikes occur but with a usually acceptable LQC\_Index (0 or 0.25) and MultiMin quality curve values below 2: MULT\_QC = 1. This value indicates that results can/should be used for the characterisation of the formation but should be treated with caution as the interpreted results are not a perfect fit with the available data.
- Otherwise, MULT\_QC = 0. Interpreted results are reliable and can be used to characterise the formation.

#### QUALITY

In addition, a quality curve is shown in Plates 1 and 2. This curve is an indication of how well the observed measurements from wireline logs and the predicted results are part of the same population. At a value of QUALITY less than one, the calculated accuracy is within 95% compared to the original wireline logs and therefore the analysis is of good quality. If the value is consistently above one, log measurements are not well honoured by the predicted curves, hence the analysis must be regarded as less robust.

Please note that the quality curve only compares the results of the MultiMin interpretation with the petrophysical logs and does not take data quality of the petrophysical logs (e.g. in bad hole sections) or lab measurements into account. The only indicator combining information on input data quality and interpretation result is the MULT\_QC indicator detailed above.

## 4 Results of the calibrated stochastic log interpretation

In the following, the main results of the stochastic log interpretation are summarised. Plate 1 shows the measured wireline logs together with the calculated output from the MultiMin approach. The main results in terms of mineral content and porosity are displayed in Plate 2 as continuous curves. Plate 2 also shows the available lab measurements (from core data).

The aim of this chapter is not a detailed description and characterisation of the sedimentary sequence based on log interpretation results, but rather gives a more general description of the data and a general characterisation of the stratigraphic system or groups shown in Plate 2. Section 4.1 compares the interpretation results with core data giving an overview on the robustness of the interpreted mineralogical content in the borehole. Section 4.2 gives a general characterisation while Section 4.3 gives a more detailed description of calculated parameters in the Opalinus Clay.

### 4.1 Comparison of interpretation results with core data

Below, the MultiMin interpretations are compared to the mineralogical (bulk) and petrophysical measurements (porosity).

Due to the log database constraints and the need for robust mathematical MultiMin models (i.e. condition numbers ideally below 5 for fair to good models), the number of modelled minerals had to be adjusted. For the sake of easy comparison, the minerals had to be grouped:

- Quartz and feldspars (plagioclase and orthoclase) are grouped into a single pseudo-mineral (called QF-Silicates in Plate 2).
- Different clay minerals were computed when possible (kaolinite – smectite together, chlorites: not potassic clays, called NO\_K\_CLAYS, and illite). All clay minerals were added to a (total) clay content (DRY\_CLAY).
- Comparable to the clay minerals, different carbonate minerals were also calculated (calcite, dolomite and siderite). In Plate 2, a track displays the total amount of carbonates (called CARBONATES). Next to it, two tracks show the calcite and dolomite content, as the latter two can be used to distinguish between some formations, especially below the Opalinus Clay.
- Below 614.4 m, only matrix and clay minerals could be computed, as APS-TLD-ECS could not be acquired. This section corresponds to the Keuper to Muschelkalk.

Figs. 4-1 to 4-5 show crossplots between mineral weight percentages from cores (X axis, from XRD lab analyses) and interpretation results from MultiMin (Y axis).

Fig. 4-6 shows the crossplot between total porosity from core (X axis, Water-loss porosity (105 °C) using grain density lab measurement) and interpretation results from MultiMin (Y axis).

All available data are displayed together, covering the interval from the Wildegg to the Klettgau Formations (data in the Bänkerjoch Formation should be regarded as semi-quantitative only). The color coding represents the formations, as per the attached legend.

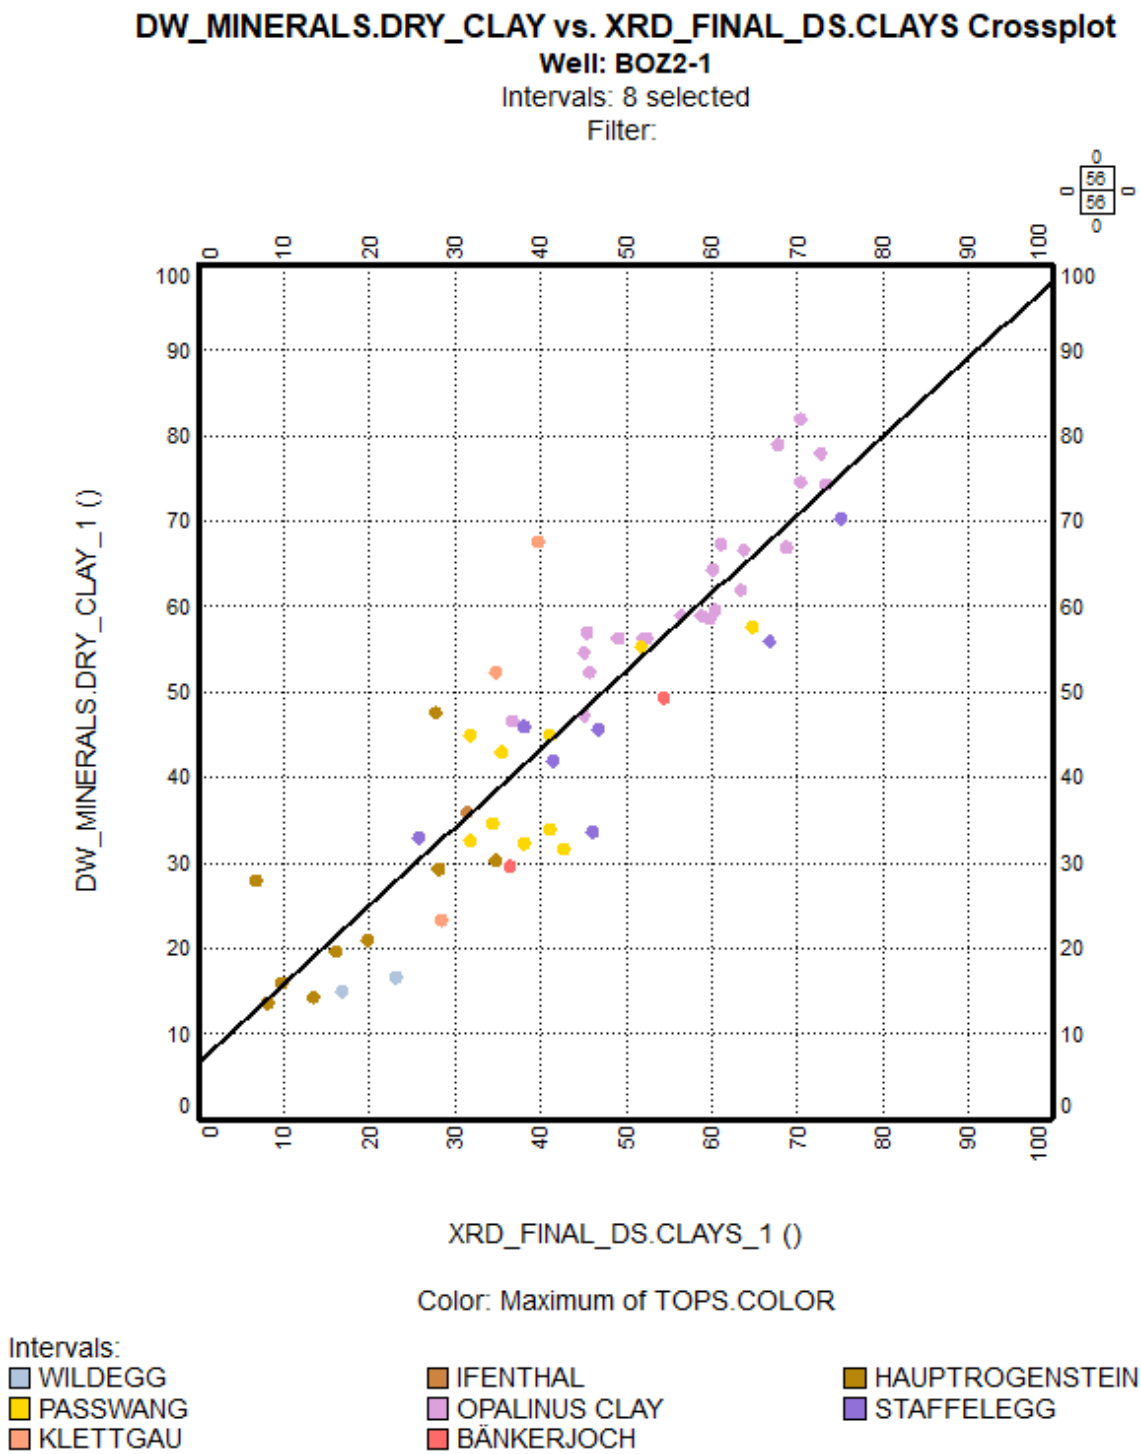


Fig. 4-1: Weight % of dry clay (y-axis) compared to core XRD data (x-axis), Wildegg to Bänkerjoch Formation


The MultiMin dry clay content is well correlated to the core XRD data (cc = 0.90).

**DW\_MINERALS.NO\_K\_CLAYS vs. XRD\_FINAL\_DS.NO\_K\_CLAYS Crossplot**

Well: BOZ2-1

Intervals: 7 selected

Filter:

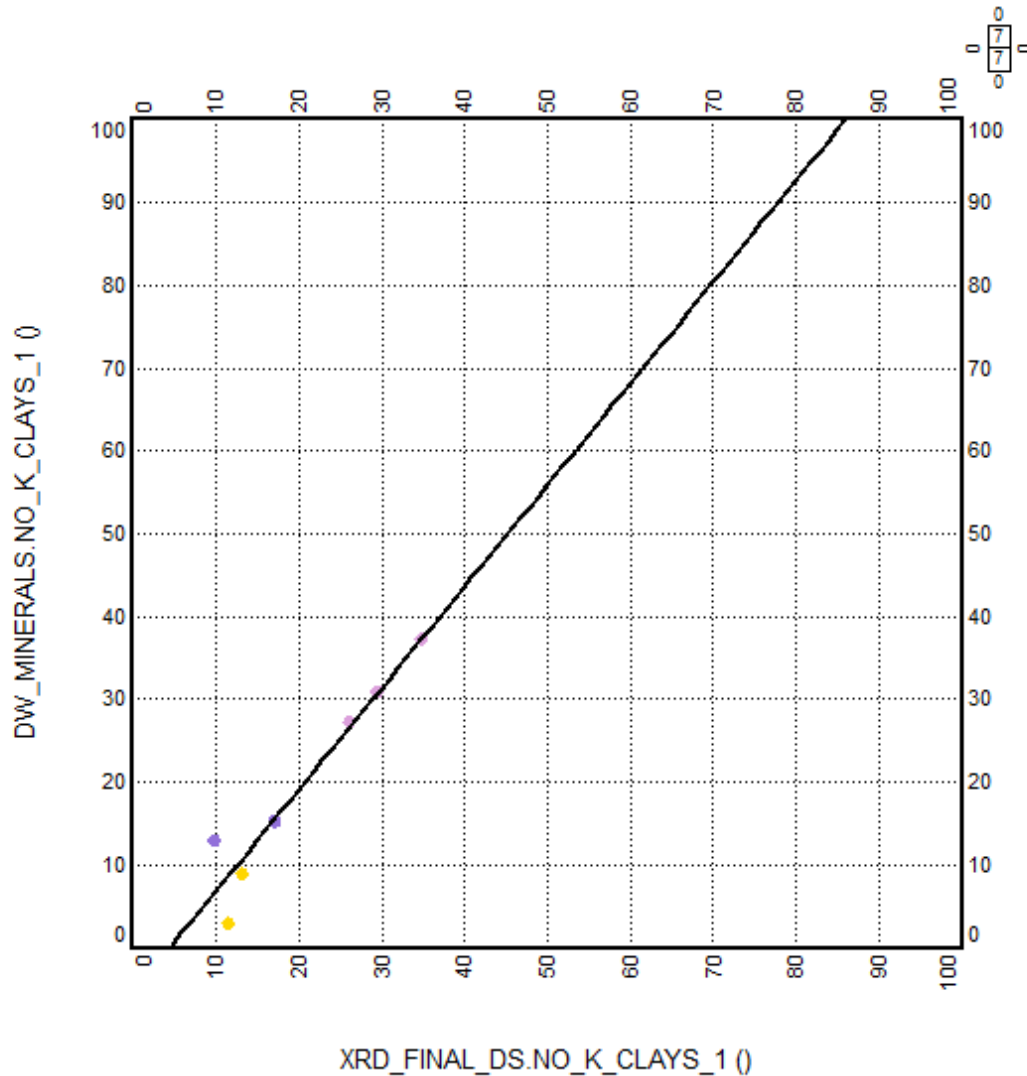

Color: Maximum of TOPS.COLOR

Intervals: ■ PASSWANG ■ OPALINUS CLAY ■ STAFFELEGG

Fig. 4-2: Weight % of not potassic dry clay (y-axis) compared to core XRD data (x-axis) (XRD data in the Passwang to Staffelegg Formation)

The XRD clay endmembers were not measured in all formations, only 7 samples were analysed.

The MultiMin not potassic clay content is well correlated to the core XRD data (overall  $cc = 0.96$ ), although not relevant with only seven samples.

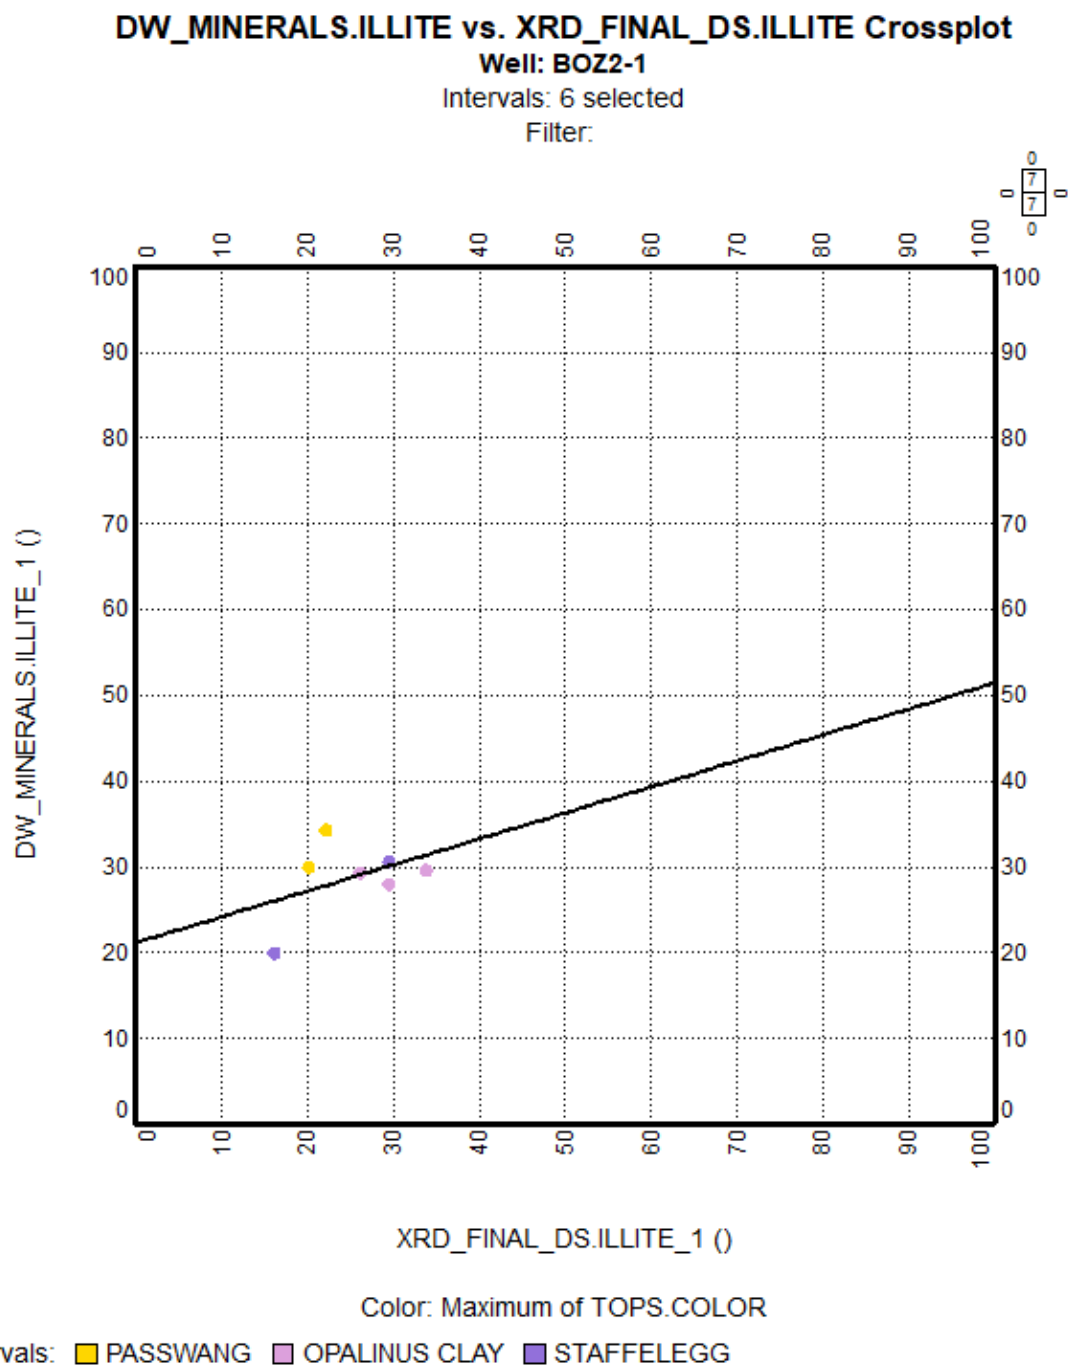


Fig. 4-3: Weight of illite (y axis) compared to core XRD data (x axis), XRD data in the Passwang to Staffelegg Formation)


The XRD clay endmembers were not measured in all formations.

The MultiMin illite content is close to the core XRD data but the correlation is not good due to the small number of core samples (cc = 0.46 with 7 samples).

**DW\_MINERALS.QF\_SILICATES vs. XRD\_FINAL\_DS.QF\_SILICATES Crossplot****Well: BOZ2-1**

Intervals: 8 selected

Filter: MULT\_QC&lt;2

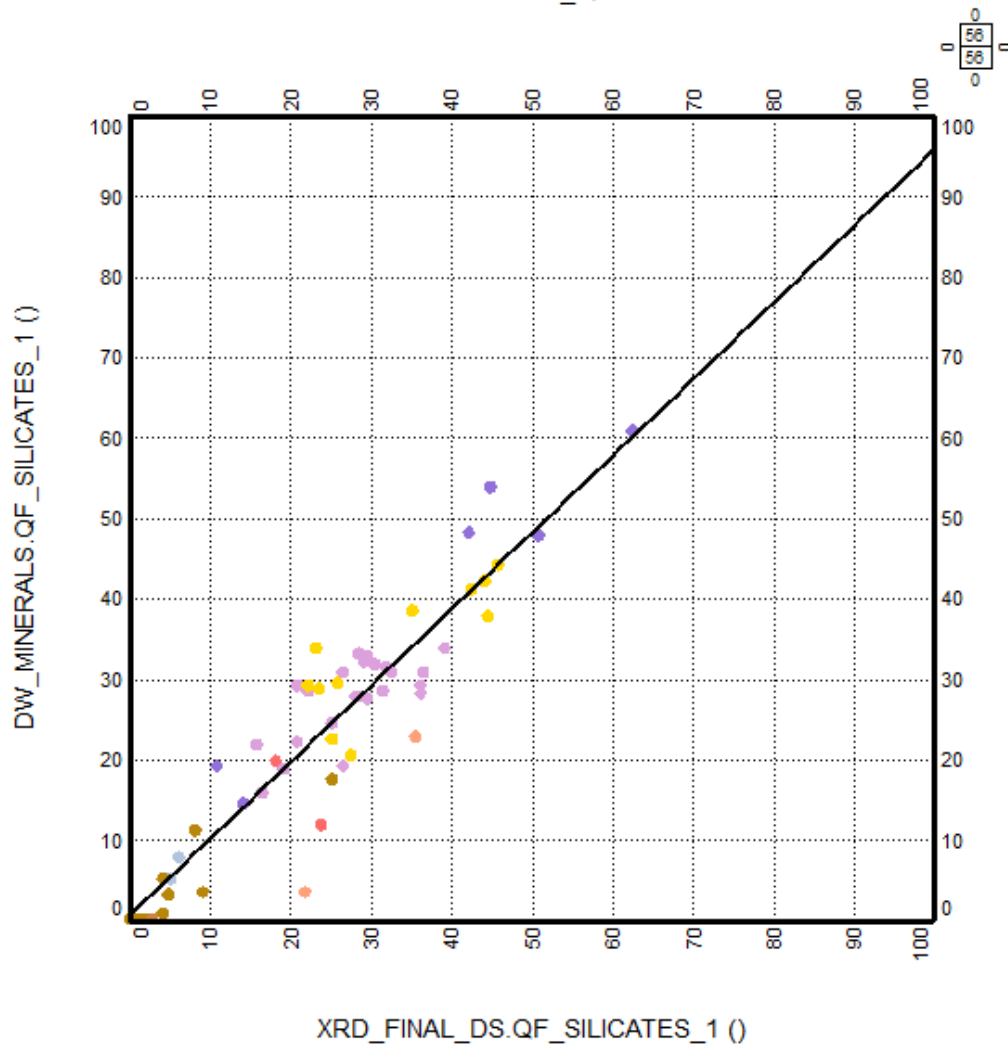

Color: Maximum of TOPS.COLOR

Intervals:

WILDEGG  
PASSWANG  
KLETTGAU

IFENTHAL  
OPALINUS CLAY  
BÄNKERJOCH

HAUPTROGENSTEIN  
STAFFELEGG


Fig. 4-4: Weight % of QF-silicates (y axis) compared to core XRD data (x axis), Wildegg to Bänkerjoch Formation

The QF-silicates are the sum of quartz and feldspars. The calibration to core XRD data is good (cc = 0.93).

**DW\_MINERALS.CARBONATES vs. XRD\_FINAL\_DS.CARBONATES Crossplot****Well: BOZ2-1**

Intervals: 8 selected

Filter: MULT\_QC&lt;2

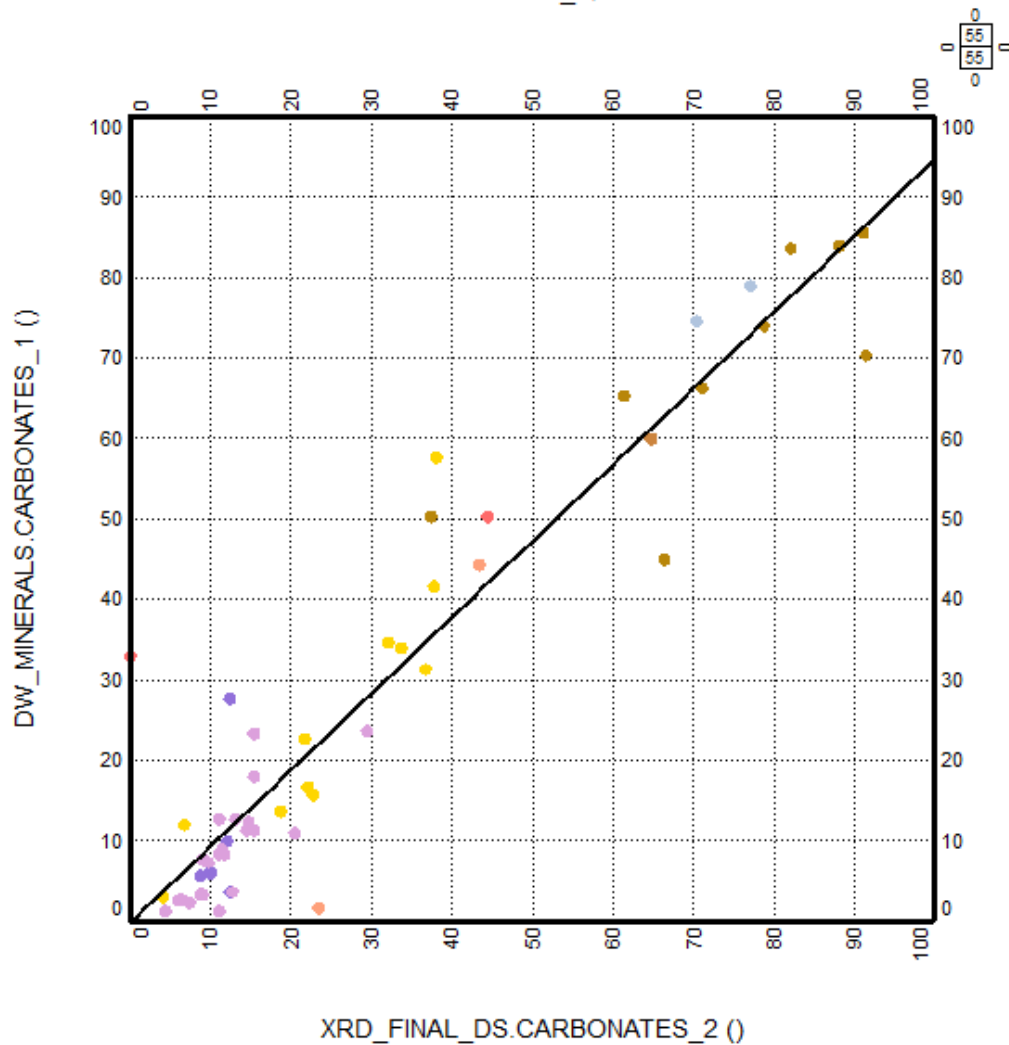

Color: Maximum of TOPS.COLOR

Intervals:

WILDEGG  
PASSWANG  
KLETTGAU

IFENTHAL  
OPALINUS CLAY  
BÄNKERJOCH

HAUPTROGENSTEIN  
STAFFELEGG

Fig. 4-5: Weight % of carbonates (y axis) compared to core XRD data (x axis), Wildegg to Bänkerjoch Formation

The carbonates include the calcite, dolomite and siderite content. The calibration to core XRD data is good ( $cc = 0.95$ ).



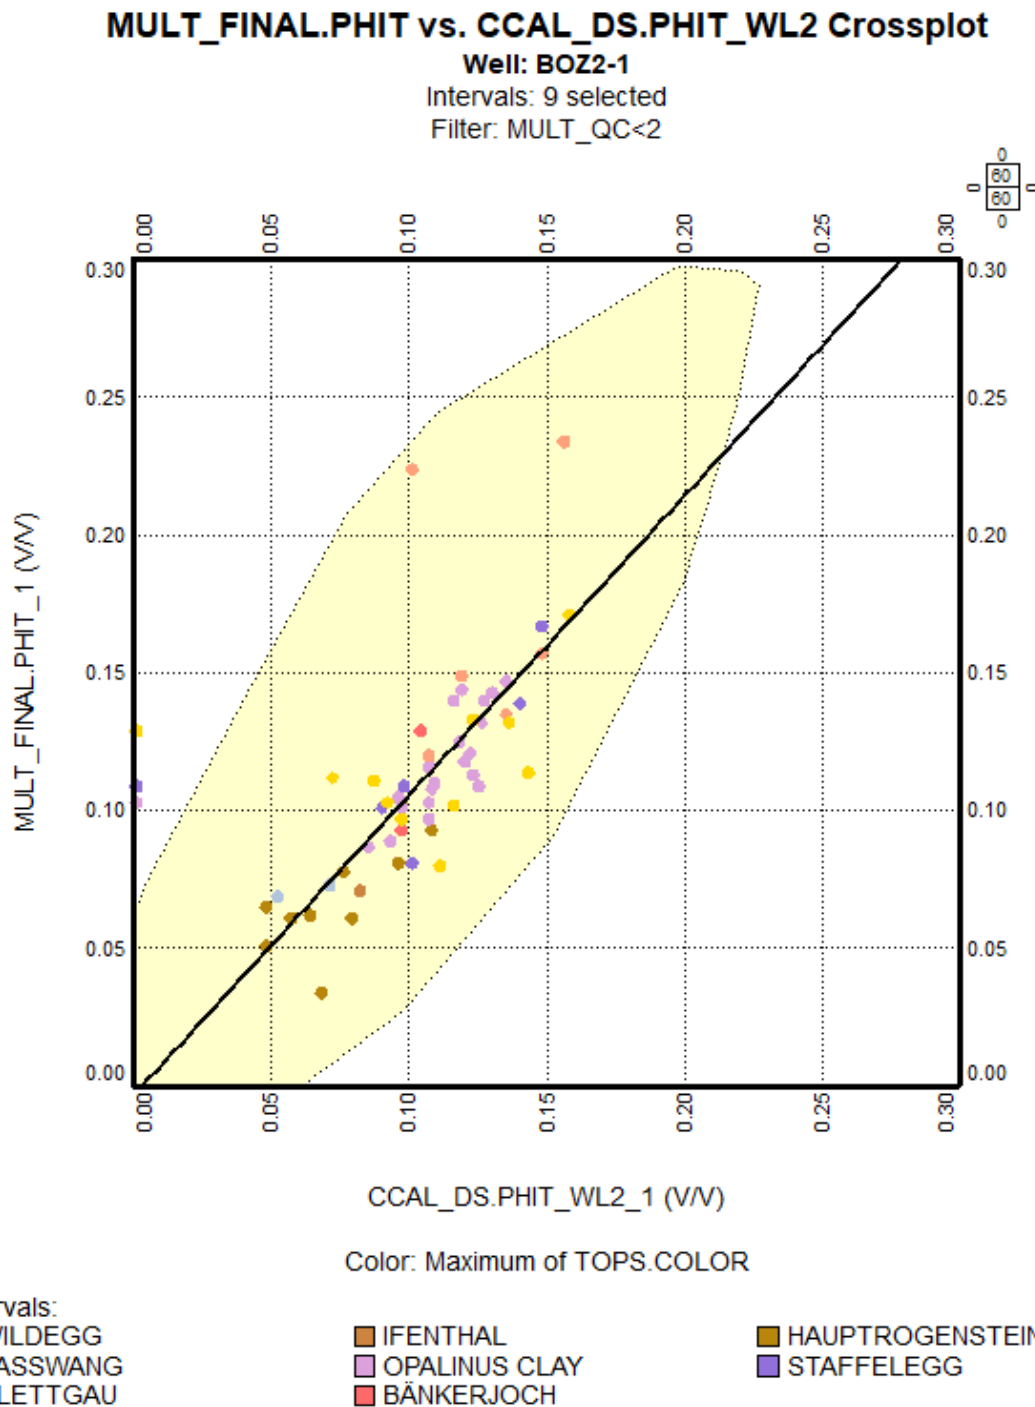


Fig. 4-6: Total porosity (v/v, y axis) compared to core data (x axis), Wildegg to Bänkerjoch Formation

The lab porosity used for the comparison was water-loss porosity (105 °C) using grain density, at ambient conditions, i.e. no confining stress was applied during measurements. Therefore, core and log measurements are not fully equivalent as the logs evaluate in situ wet formations. Nevertheless, the correlation between MultiMin and lab porosity, is fair ( $cc = 0.77$ ). Some dispersion can be noticed in the «Brauner Dogger», Hauptrogenstein Formation. The points inside the yellow polygon are used for the regression, excluding three data points in the Dogger showing inconsistent PHIT with zero values. The points outside near the y-axis are not well understood, with core PHIT close to 0%. Two data points in the Klettgau Formation are not well calibrated by the MultiMin model using MSCL data. The correlation is much better without these two points ( $cc = 0.87$ ).

## 4.2 Main results of the core-calibrated log analyses in the BOZ2-1 borehole

The main aim of the MultiMin interpretation were continuous curves of porosity and clay content of BOZ2-1. Several other minerals have been determined (mainly QF-silicates and carbonates). Below is a summary of the main parameters of clay, carbonate, QF-silicate content and porosity for each system/group.

If not stated otherwise, the clay content is used *sensu lato* meaning that the clay content is used as a general term for the total clay mineral content of the formation (i.e. the sum of all clay minerals). Carbonates and QF-silicates are also used *sensu lato* where carbonates are regarded as the sum of all carbonate minerals (calcite, dolomite and siderite) while QF-silicates is used *synonymously* for the sum of quartz (*sensu stricto*) and feldspars.

### Malm (50.0 – 304.4 m, Wildegg Formation)

The first wireline logging data suitable for a MultiMin analysis start at 102.8 m. The top part of the Wildegg Formation (50 to 102.8 m) could therefore not be interpreted.

As expected, carbonates and clays are the main constituents in the Wildegg Formation. The mean dry clay content is 24.6 wt.-% (median of 25.0 wt.-%), while the mean calcite is 65.5 wt.-% (median 66.0 wt.-%). The remaining is mostly quartz and feldspars, QF-silicate content is 8.9 wt.-% mean and 8.4 wt.-% median. The clays and matrix mineral proportions vary significantly in the Wildegg Fm., the clay content ranges from 0 to 51.1 wt.-%. The more clay-rich lithologies show a slightly increased QF-silicate content.

The carbonate content is dominated by calcite, as neither dolomite nor siderite was measured on core XRD.

Total porosity in the Wildegg Fm. ranges between 4.9 and 15.2% (mean of 9.3%, median of 9.0%), filtered by MULT\_QC = 0.

### Dogger (304.4 – 573.9 m, Ifenthal Formation, Hauptrogenstein, Passwang Formation, Opalinus Clay)

The boundary between the Malm and the Dogger is clearly marked by a sharp increase of the iron content (DWFE\_CORR up to 7.2 wt.-%) and the clay content (characterised by a thorium peak).

The carbonate content in the Dogger is high in the Ifenthal Formation and the Hauptrogenstein, then decreases in the Passwang Formation and reaches low values at the base of the Opalinus Clay. The dry clays and QF-silicates increase accordingly and are highest in the lower third of the Opalinus Clay.

From the Ifenthal Formation to the Hauptrogenstein, the mean calcite content is 70.2 wt.-% (median 73.5 wt.-%), while the mean dry clay is 23.5 wt.-% (median 20.7 wt.-%) and the mean QF-silicates is 3.0 wt.-% (median 0.9 wt.-%).

In the Passwang Formation, the mean calcite content decreases to 37.5 wt.-% (median 37.6 wt.-%), while the mean dry clay content is 31.8 wt.-% (median 29.8 wt.-%) and the mean QF-silicate content is 27.4 wt.-% (median 25.0 wt.-%).

In the Opalinus Clay, the mean calcite content is down to 7.3 wt.-% (median 5.8 wt.-%), while the mean dry clay content is 62.4 wt.-% (median 62.4 wt.-%) and the mean QF-silicate content is 27.5 wt.-% (median 27.8 wt.-%). See more details in Section 4.3.

The Dogger carbonate content is dominated by calcite down to the middle of the Opalinus Clay and siderite (maximum 11.31 wt.-% on core XRD at 530.44 m) in the lower half of the Opalinus Clay. The mean siderite content is 1.9 wt.-% while the median is 1.6 wt.-%

When comparing the ECS iron content (corrected to XRF data, DWFE\_CORR curve) with the XRD iron-rich minerals (siderite, pyrite) in the «Brauner Dogger», an excess of iron can be noticed. If the iron content measurement is valid, the presence of an additional iron-rich mineral species is possible: iron oxides or hydroxides. This was modelled as iron oxide with MultiMin.

Total porosity of the Dogger also is contrasted between the different units. PHIT is not very variable in the Opalinus Clay (minimum / maximum 7.0 / 15.1%, mean 11.6% and median 11.5% with a low standard deviation 1.7%). PHIT is more variable in the overlying Dogger formations, strongly correlated with the clay content (clay bound water).

In the Passwang Formation, PHIT ranges from 3.4 to 17.4%, although this high value is dubious, related to high Fe content possibly poorly interpreted (with MULT-QC = 0). The mean PHIT is 9.6% and the median 9.3%.

In the Ifenthal Formation to the Hauptrogenstein, the mean porosity is 7.0% (median 6.8%), ranging from 3.1 to 11.8%.

### **Lias (573.9 – 612.8 m, Staffelegg Formation)**

The formation boundary from the Opalinus Clay (Dogger) to the Staffelegg Formation (Lias) corresponds to a sharp drop of the clay content and a sharp rise of the carbonate (mostly calcite) content.

The carbonate content of the Lias reflects the lithology, where the Gross Wolf Member down to Grünschlholz and Beggingen Members have a relatively high carbonate content (calcite respectively mean/median 53.6 / 51.9 wt.-%, and 75.8 / 76.5 wt.-%), while the Frick and Schambelen Members have a significantly lower carbonate content (mean / median 5.2 / 4.6 wt.-% and 12.5 / 8.0 wt.-%). As in the previous groups, the carbonate content is dominated by calcite. As only a low dolomite content was measured from cores (maximum 3.19 wt.-% on XRD data), it was neglected in the MultiMin models. Although a significant sulphur content was measured by the ECS, no siderite and low pyrite (up to 4.6 wt.-%) content was measured from cores. MultiMin computed siderite from the excess iron, possibly in excessive amount.

The QF-silicate content shows the reverse of the carbonate content. While Gross Wolf down to Grünschlholz and Beggingen Members show a relatively low QF-silicate content (respectively mean / median 10.3 / 9.4 wt.-% and 3.7 / 3.5 wt.-%), the Frick and Schambelen Members show higher QF-silicate contents (respectively mean / median 51.1 / 52.6 wt.-% and 23.5 / 20.0 wt.-%).

The clay content follows the same trend, moderate in the Gross Wolf down to Grünschlholz and Beggingen Members (respectively mean / median 32.2 / 32.8 wt.-% and 11.4 / 11.5 wt.-%) and higher in the Frick and Schambelen Members (respectively mean / median 42.5 / 42.9 wt.-% and 62.1 / 61.0 wt.-%).

The Staffelegg formation is also characterised by high total organic carbon (TOC), not fully reconstructed by the MultiMin interpretation with the available wireline logs. The maximum TOC measured on cores was 2.68 wt.-% at 579.8 m. This miscalibration of the TOC most likely impacts the PHIT computation (overestimated in high-TOC intervals) and was flagged with the MULT\_QC curve.

The total porosity in the Staffelegg Formation ranges between 0.1 and 24.1%, the highest values in the Rietheim Member possibly being artefacts due to the poor calibration of the high TOC. Except in this member, the total porosity increases with the clay content, up to 18.3% in the Schambelen Member.

The mean / median PHIT in the Staffelegg Formation are 9.6 / 9.9% with MULT\_QC = 0.

### **Keuper (612.8 – 749.52 m, Klettgau Formation, Bänkerjoch Formation):**

As mentioned earlier in this Dossier, the MultiMin analysis was performed only in the Klettgau to Bänkerjoch Formations.

The Klettgau Formation is characterised by a high clay content (mean / median 47.7 / 49.0 wt.-%), a high carbonates content (mean / median 38.0 / 42.4 wt.-%) and a relatively low QF-silicate content (mean / median 12.8 / 9.9 wt.-%).

The Bänkerjoch Formation is less argillaceous (clays: mean / median 25.2 / 26.1 wt.-%), with a high carbonates content (mean / median 30.8 / 31.3 wt.-%) and high anhydrite (mean / median 34.8 / 32.6 wt.-%). The QF-silicate content is slightly lower, mean/median 9.1/8.7 wt.-%.

The total porosity is higher in the argillaceous Klettgau Formation (mean and median 14.8%) than in the anhydrite-rich Bänkerjoch Formation (mean / median 7.4 / 6.9%).

### **Muschelkalk (749.52 – 829.88 m, Schinznach Formation and Zeglingen Formation)**

Due to inconsistencies between MSCL and XRD data, this interval could not be evaluated, except from the top Schinznach Formation down to 753.3 m.

These few meters at top Schinznach Formation are porous dolomites, with PHIT up to 15.8%, just below the base Bänkerjoch Formation anhydrites.

### 4.3 Main results of the core-calibrated log analysis in the Opalinus Clay (451.9 – 573.89 m)

The main results in terms of total clay content, mineralogy and total porosity for the main focus interval (Opalinus Clay) are shortly described in this section. Figs. 4-7 to 4-13 show some general statistical values of the MultiMin analysis results within the Opalinus Clay.

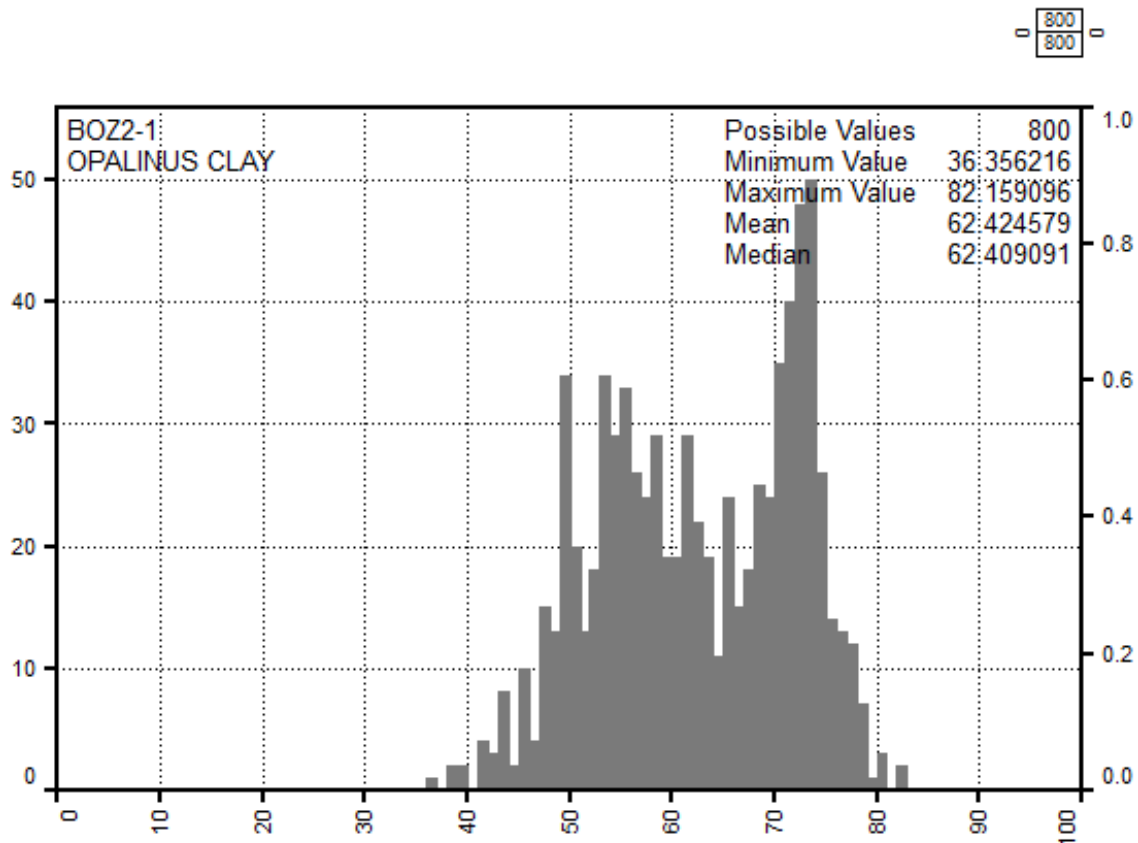


Fig. 4-7: Dry clay weight percentage frequency histogram in the Opalinus Clay  
X-axis is the dry clay wt.-% from MultiMin, y-axis the number of points per bin (100 bins).

In the clay-rich Opalinus Clay, the mean and median dry clay contents are close to 62.4 wt.-%. The distribution looks bimodal, with the lowest clay content in the shallowest part of the Opalinus Clay).

The two next frequency histograms (Figs. 4-8 and 4-9) show a split of the Opalinus Clay into an upper and lower part, showing that the latter is significantly more argillaceous.

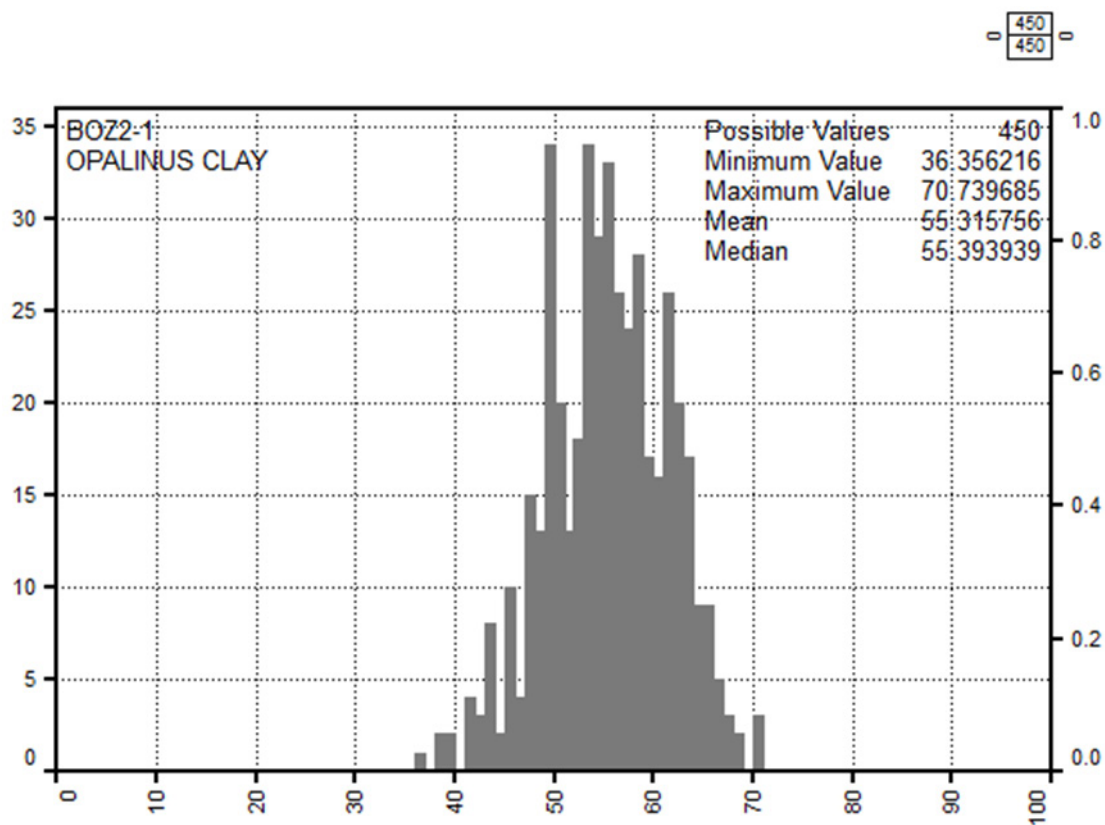


Fig. 4-8: Dry clay weight percentage frequency histogram in the upper section of the Opalinus Clay (above 520.5 m)  
X-axis is the dry clay wt.-% from MultiMin, y-axis the number of points per bin (100 bins).

In the upper part of the Opalinus Clay (above 659 m), the mean and median dry clay content are close to 55.3 and 55.4 wt.-%. The top part of the formation is significantly less argillaceous than the bottom, see Fig. 4-9.

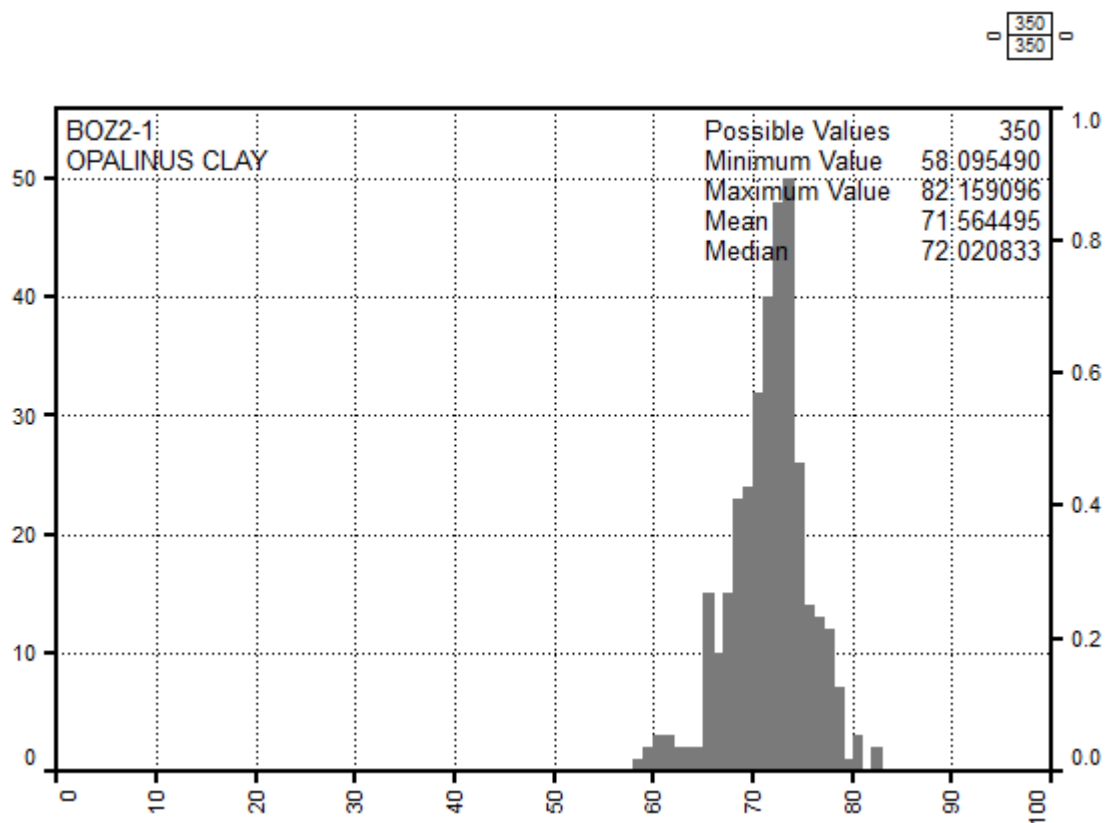


Fig. 4-9: Dry clay weight percentage frequency histogram in the lower section of the Opalinus Clay (below 520.5 m)

X-axis is the dry clay wt.-% from MultiMin, y-axis the number of points per bin (100 bins).

The bottom part of the Opalinus Clay (below 520.5 m) is more argillaceous: the mean and median dry clay content are close to 71.6 and 72.0 wt.-%.

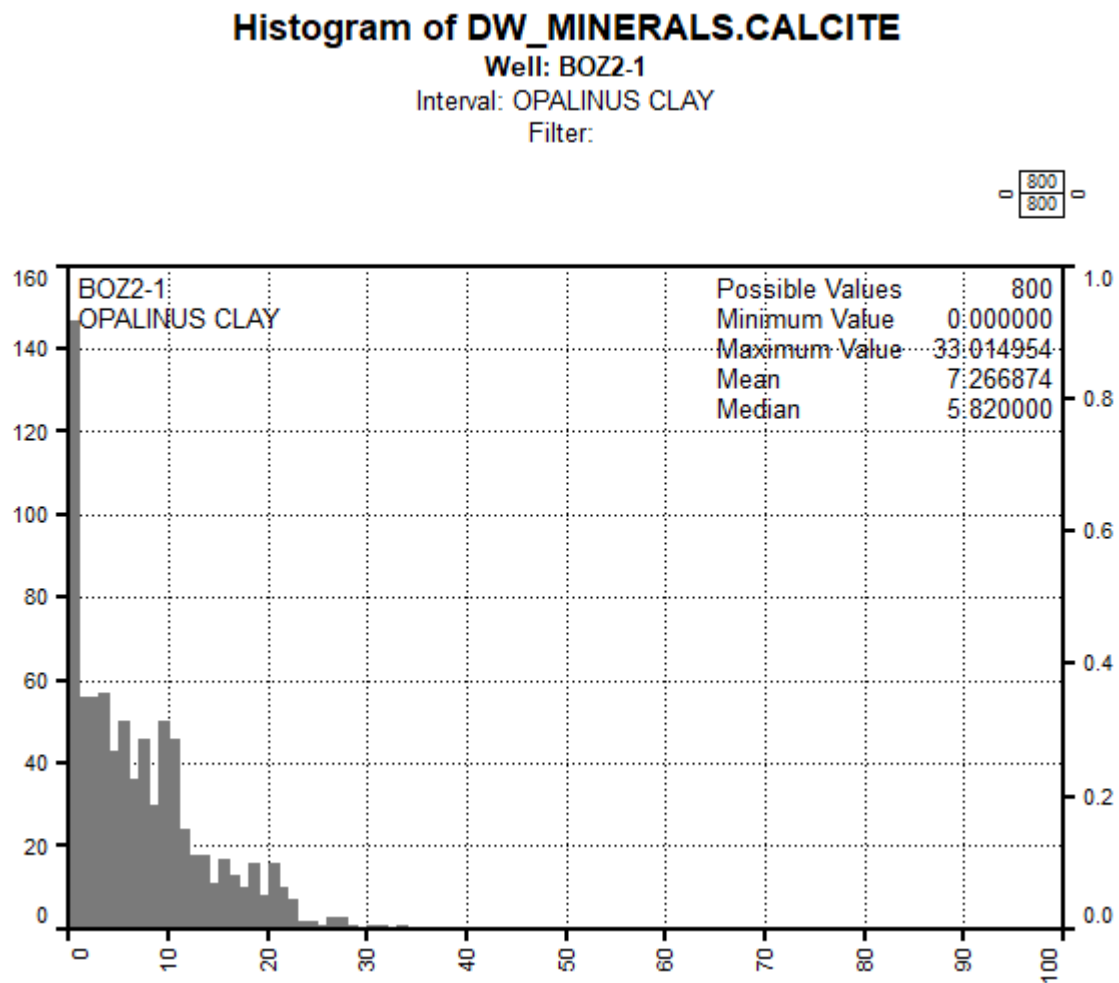


Fig. 4-10: Calcite weight percentage frequency histogram in the Opalinus Clay

X-axis is the calcite wt.-% from MultiMin, y-axis the number of points per bin (100 bins).

The mean and median calcite content are close to 7.3 and 5.8 wt.-% (Fig. 4-10). The maximum values are up to 33.0 wt.-%, i.e., corresponding to thin, calcite-rich layers. In case these layers are thinner than the log resolution, the maximum calcite content would be higher than computed by MultiMin.

The top part of the Opalinus Clay is more calcitic than the bottom (see Plates 1 and 2).



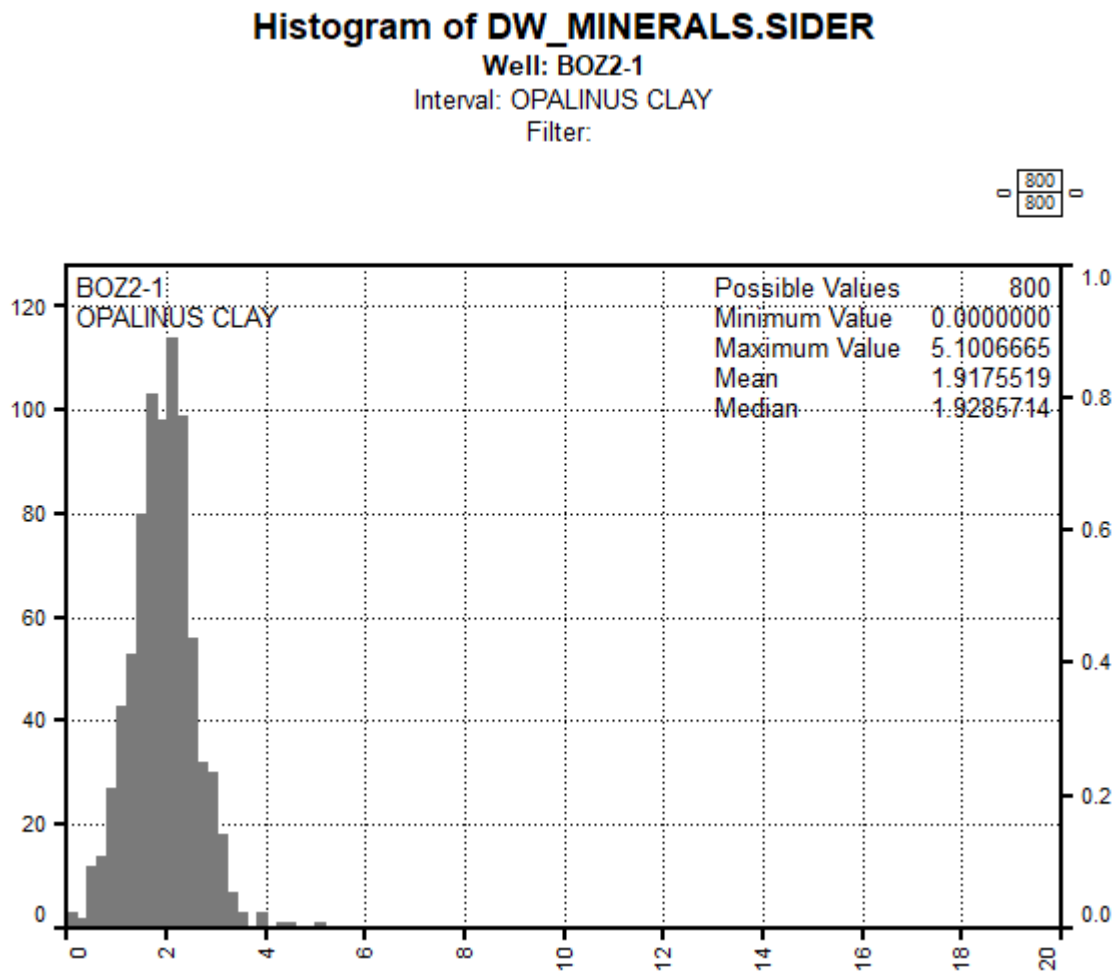


Fig. 4-11: Siderite weight percentage frequency histogram in the Opalinus Clay  
X-axis is the siderite wt.-% from MultiMin, y-axis the number of points per bin (100 bins).

The mean and median siderite content are close to 1.9 wt.-%, with a maximum value of 5.1 wt.-% and a minimum value of 0 wt.-% (Fig. 4-11). Please note that the siderite core calibration is less constrained than other minerals.

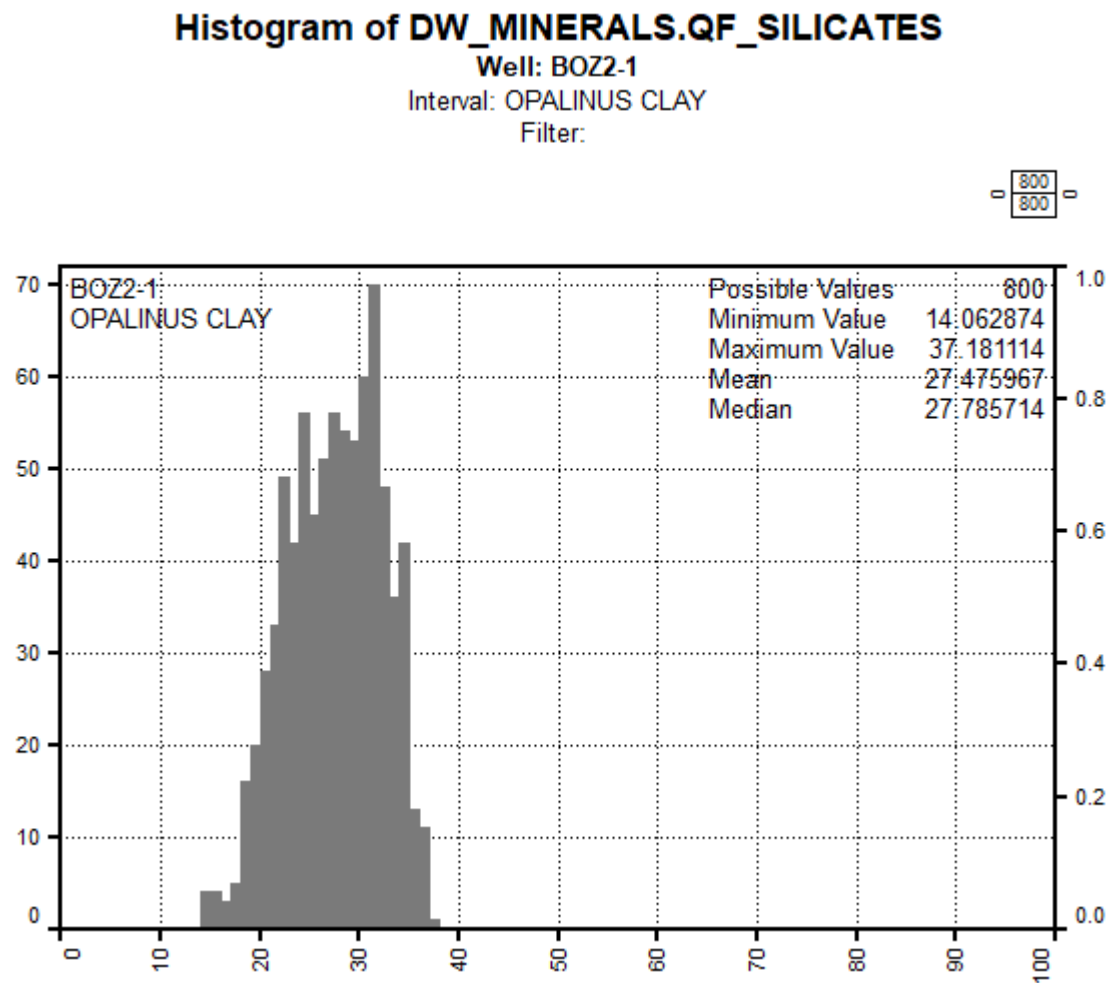


Fig. 4-12: QF-silicates (quartz and feldspars) weight percentage frequency histogram in the Opalinus Clay

X-axis is the QF-silicates wt.-% from MultiMin, y-axis the number of points per bin (100 bins).

The mean and median QF-silicates (quartz, plagioclases and potassic feldspars) contents are close to 27.5 and 27.8 wt.-% (Fig. 4-12), much higher than the carbonates (mean / median calcite close to 6 / 7 wt.-%).

From core XRD data, the quartz represents two thirds and feldspars the remaining third of the total QF-silicate content.

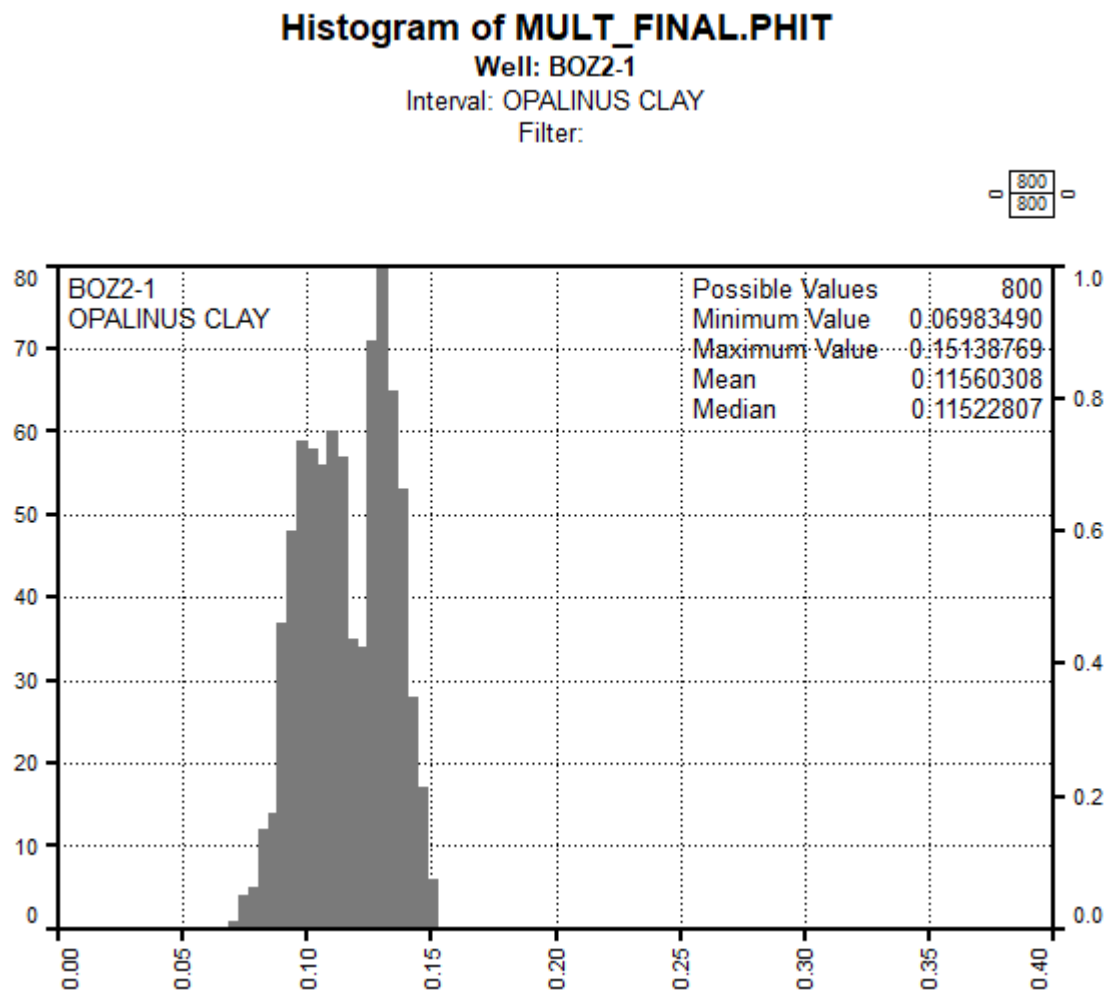


Fig. 4-13: Total porosity frequency histogram in the Opalinus Clay

X axis is the total porosity v/v from MultiMin, y axis the number of points per bin (100 bins)

The mean and median total porosities are close to 11.6% and 11.5%, with a range from 7.0 to 15.1% (Fig. 4-13). The distribution is bimodal, reflecting the distribution of the clay content.

Fig. 4-14 summarises the main results in the Opalinus Clay.

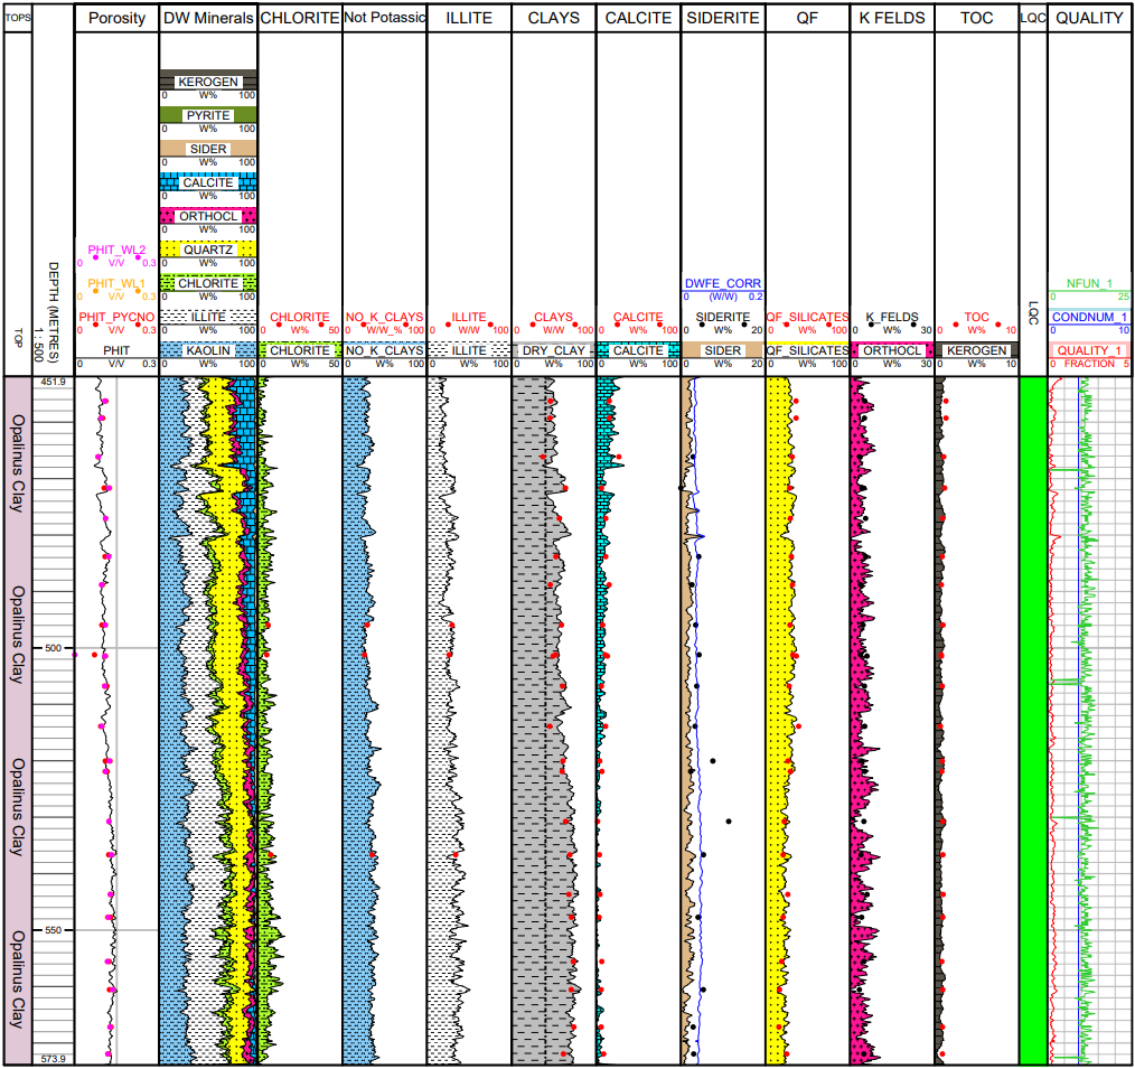


Fig. 4-14: Main log and core results in the Opalinus Clay

The back line in the all clay minerals track represents a 40% baseline.

The wireline log quality was good in all the Opalinus Clay, as shown by the green LQC flag.

The MultiMin quality curve always remains low, generally below 1.00, indicating an overall good curve prediction.

The total porosity and the main minerals dry weight are well calibrated to the core XRD measurements. The siderite calibration is less accurate, although the high XRD siderite is not reflected in the DWFE\_CORR log (blue curve in the "Siderite" track), possibly due to local heterogeneities.

The whole Opalinus Clay is very argillaceous, almost always above the 40 wt% (black line in the "All Clay minerals" track in Fig. 4-14). A few carbonates streaks in the top third part have a lower clay content.

## 5 Summary

The MultiMin interpretation was successfully applied in the BOZ2-1 borehole using the Paradigm Geolog MultiMin software (see Plates 1 and 2). Based on available petrophysical logs and formation mineralogical contents, several specific MultiMin interpretation intervals were identified. Some of these intervals needed to be further subdivided due to e.g. borehole conditions to ensure the best possible MultiMin interpretation result.

Core data from lab measurements were also available so that the mineralogical content and other parameters (e.g. density and/or porosity) were known at several points along the borehole. These core data included bulk rock XRD mineralogy, clay mineralogy, pycnometer and water loss porosity and grain density. The core data was used as a starting parameter set for the MultiMin interpretation where available.

The mineralogical MultiMin interpretation results were converted to weight percentages for a straightforward comparison with core XRD measurements. In general, the comparisons showed a good agreement between the mineralogy (and porosity) from the MultiMin interpretation and the core data. QF-silicates and carbonates show a good agreement with core data throughout the borehole even in the lowermost units. The differentiation between illite (potassic clay) and not potassic clays was fairly achieved, while the chlorite endmember remains less accurate. The total porosity is well calibrated to core measurements in the Opalinus Clay; the calibration was fair in the whole borehole, with occasional miscalibrations where the borehole quality was degraded (e.g. in the Keuper), in organic-rich layers of the Staffelegg Formation and in the «Brauner Dogger» (core PHIT higher than MultiMin PHIT as core-derived bulk density is lower than logs).

The continuous curves from the MultiMin interpretation can be used to characterise the different formations (and hence members) occurring in BOZ2-1. The Opalinus Clay shows a quite variable total clay content, though in most locations it is well above 40 wt.-%. The lower third of the formation is significantly more argillaceous than the top, as already noticed in many regional locations.

In addition, boundaries between formations (and between members) are often clearly marked by a decrease or increase of clay, QF-silicate and/or carbonate contents.

The lowest section in the Triassic (Keuper and Muschelkalk) formations could not be fully logged, the TLD-APS-ECS services were not acquired. The MSCL data were successfully used as an input for the MultiMin models in the Keuper, however, due to the missing petrophysical logs, the results have a higher uncertainty than interpretations with a full coverage of petrophysical logs.



## 6 References

- Isler, A., Pasquier, F. & Huber, M. (1984): Geologische Karte der zentralen Nordschweiz 1:100'000. Herausgegeben von der Nagra und der Schweiz. Geol. Komm.
- Marnat, S. & Becker, J.K. (2021): Petrophysical log analyses of deep and shallow boreholes: Methodology report. Nagra Arbeitsbericht NAB 20-30.
- Mazurek, M. (2017): Gesteinsparameter-Datenbank Nordschweiz – Version 2. Nagra Arbeitsbericht NAB 17-56.
- Nagra (2014): SGT Etappe 2: Vorschlag weiter zu untersuchender geologischer Standortgebiete mit zugehörigen Standortarealen für die Oberflächenanlage. Geologische Grundlagen. Dossier II: Sedimentologische und tektonische Verhältnisse. Nagra Technischer Bericht NTB 14-02.
- Pietsch, J. & Jordan, P. (2014): Digitales Höhenmodell Basis Quartär der Nordschweiz – Version 2013 (SGT E2) und ausgewählte Auswertungen. Nagra Arbeitsbericht NAB 14-02.
- Waber, H.N. (ed.) (2020): SGT-E3 deep drilling campaign (TBO): Experiment procedures and analytical methods at RWI, University of Bern (Version 1.0, April 2020). Nagra Arbeitsbericht NAB 20-13.